GARBAGE-GUARD: DEVELOPMENT OF COMPUTER VISION FOR CREEKS GARBAGE DETECTION USING CONVOLUTIONAL NEURAL NETWORK

A Capstone Study

Presented to the Faculty of the

ELECTRONICS ENGINEERING TECHNOLOGY DEPARTMENT

College of Industrial Technology

Technological University of the Philippines

Ayala Boulevard, Ermita, Manila

by

BRIAN JAY CELESTE

GENESIS WALTER D. REYES II

JADE C. GUNAYAN

KING PERTH G. PEPITO

RODEL S. BANOGBANOG

In Partial Fulfillment for the Requirements of the Degree

Bachelor of Engineering Technology major in Computer Engineering Technology

November, 2026

Technological University of the Philippines
COLLEGE OF INDUSTRIAL TECHNOLOGY
Ayala Boulevard, Ermita, Manila 1000
cit@tup.edu.ph

APPROVAL SHEET

The capstone study titled **"GARBAGE-GUARD: DEVELOPMENT OF COMPUTER VISION FOR CREEKS GARBAGE DETECTION USING CONVOLUTIONAL NEURAL NETWORK"**, prepared and submitted by **BRIAN JAY CELESTE, GENESIS WALTER D. REYES II, JADE C. GUNAYAN, KING PERTH G. PEPITO and RODEL S. BANOGBANOG**, in partial fulfillment of the requirements for the degree **Bachelor of Engineering Technology major in Computer Engineering Technology**, is hereby approved and accepted.

JONEL R. MACALISANG
Adviser

TRISTAN R. MOPAS
Chairperson

MARC ARDIE V. ARDIENTE
Member

MA. IAN P. DE LOS TRINOS
Member

MINABELLE D. VILLAFUERTE
Member

GHAZALI R. SISON
Dean, College of Industrial Technology

Date: _____

TABLE OF CONTENTS

Section	Page
PRELIMINARIES	
Title Page	i
Approval Sheet	ii
Table of Contents	iii
List of Tables	v
List of Figures	vii
List of Abbreviations	xii
Abstract with Keywords	xiii
I. INTRODUCTION	**1**
1.1 Background of the Study	1
1.2 Objectives of the Study	2
1.3 Scope and Limitations of the Study	3
1.4 Significance of the Study	5
II. LITERATURE REVIEW	**6**
2.1 Conceptual Framework of the Study	6
2.2 Review of Related Literature and Studies	8
2.3 Review of Related Patents	27
2.4 Synthesis of the Review	37
III. METHODOLOGY	**40**
3.1 Project Design	40
3.2 Block Diagram	42
3.3 Flowchart	43
3.4 Component Materials	45
3.5 Project Development	62

IV. RESULTS AND DISCUSSION **83**

4.1 Project Description 83

4.2 Project Structure 87

4.3 Test Case Results 94

4.4 Field Deployment Results 112

4.5 Evaluation Results 114

4.6 Project Capabilities and Limitations 117

V. CONCLUSIONS **120**

5.1 Summary of Findings 120

5.2 Conclusions 122

5.3 Recommendations 125

VI. ACKNOWLEDGMENT **129**

VII. DECLARATION OF CONFLICT OF INTEREST **130**

VIII. REFERENCES **131**

IX. APPENDICES **137**

Appendix A. Gantt Chart 138

Appendix B. Bill of Materials 139

Appendix C. Testing Permit 140

Appendix D. Deployment Permit 142

Appendix E. Documentation of the Study 145

Appendix F. Usability Survey Form 159

Appendix G. End-User Usability Survey Responses 160

Appendix H. User Interface of the System 161

Appendix I. Source Code 182

X. STUDENTS' BIONOTE **277**

LIST OF TABLES

Table	Title	Page
1	Table of Related Patents	27
2	Proposed Solution Matrix	39
3	ISO/IEC 25010:2023-based Metrics Descriptions and Scale of Measurements for Garbage-Guard	73
4	Unit Testing Cases for Controlled Environment Evaluation	77
5	System Testing Cases for Real-World Environmental Conditions	78
6	Acceptance Testing Evaluation Test Cases	80
7	Developer-Side Internal Acceptance Indicators	81
8	End User Side Acceptance Survey Indicators	81
9	Five-Point Likert Scale and Interpretation of the Weighted Mean	82
10	Training Runs of the YOLO26n Model and Their Test Results	95
11	Per-Class Detection Results on the Frozen Test Set and on the Creek Images	98
12	mAP@0.5 of v7 to v10 on the Frozen Test Set and the Creek-Only Photographs	102
13	mAP@0.5 on Pictures from the Prototype's Camera and on the Third-Session Test Half	103
14	Unit Testing Results	104
15	System Testing Results	105
16	Field Deployment Log	112
17	Threshold Calibration Record	113

Table	Title	Page
18	Developer-Side Internal Acceptance Results	115
19	Acceptance Testing Results	115
20	End-User Usability Survey Results	116
G1	Ratings and Comments of the Respondents in the End-User Usability Survey	160

LIST OF FIGURES

Figure	Title	Page
1	Conceptual Framework of Garbage-Guard	6
2	Cumulative Contribution of Rivers to Global Plastic Emission	9
3	Municipal Solid Waste against Gross Domestic Product per Capita	11
4	Weathering and Fragmentation of Plastic in the Marine Environment	12
5	Floating Objects Detected on a Water Surface	13
6	Success Rates of Visual Tracking Algorithms on a Benchmark Set	14
7	Detection and Tracking Pipeline for River-Floating Waste	15
8	Detection Accuracy in the Laboratory Compared with the Field	16
9	Floating Litter Images with True and Predicted Labels	17
10	Ground Truth Compared with Model Output for Three Waste Classes	18
11	Overhead Imagery of the Kind Used for Object Detection	20
12	Architecture of the YOLOv8 Detector	21
13	Selection of Studies for a Systematic Review of Air Quality Monitoring	23
14	Water Level and Pressure Recorded during a Rainfall Event	25
15	Neuro-Fuzzy Network for Flood Forecasting	26
16	Garbage Detection Method, Related Equipment and Device	28
17	Vision Garbage Classification System and Classification Method Based on TensorFlow	29
18	WCM-Smart City: Waste Collection and Management under Smart City Using IoT	30
19	Cleaning Unit Using Deep Learning for Floating Trash Detection	31
20	System for Monitoring Water Drainage	32
21	Drainage Monitoring Apparatus and System	33

Figure	Title	Page
22	Detection and Monitoring of Waste Disposal Using Artificial Intelligence	34
23	Flood Warning System	35
24	Method and System for Flood Early Warning in Smart Cities Based on the Internet of Things	36
25	Apparatus and Method for Waste Monitoring and Analysis	37
26	Garbage-Guard's System Architecture	40
27	Front and Side Views of the Garbage-Guard Enclosure with Dimensions	41
28	System Flow of the Waste Detection System	42
29	Garbage-Guard's System Flowchart	43
30	Raspberry Pi 5 Single-Board Computer	45
31	Hikvision HiWatch HWI-B140H Bullet Network Camera	46
32	Waveshare UPS HAT (E) with Four Battery Bays	47
33	5V to 12V USB-A to DC Barrel Step-up Cable	48
34	Erlvsoiis WF-ER1800M Dual-Band USB Wi-Fi Adapter	49
35	Vention USB 3.0 Type A Male-to-Female Extension Cable	49
36	7-inch IPS HDMI Touchscreen	50
37	Raspberry Pi Active Cooler Fitted to a Raspberry Pi 5	51
38	SanDisk High Endurance 64GB microSD Card	52
39	KingSpec M.2 2242 NVMe Solid-State Drive	52
40	Waveshare PCIe to 2-Channel M.2 Adapter	53
41	MH-FMD Passive Buzzer Module	54
42	Metal Waterproof Junction Box Used for the Enclosure, Before Modification	55

Figure	Title	Page
43	Mitsushi 2500W Power Extension with Three Universal Outlets and Six USB Ports	56
44	5V USB Case Fan	57
45	V-Model and Scrum Hybrid Development Model	62
46	Model Training and Deployment Pipeline	64
47	Annotating a Food Container in the Roboflow Annotation Editor	68
48	A Fully Annotated Creek Frame in the Garbage-Guard Dataset	69
49	The Assembled Garbage-Guard Unit with the Hikvision HiWatch HWI-B140H Camera	84
50	Side View of the Enclosure Showing the Case Fan and the USB Wi-Fi Adapter	85
51	Inside of the Enclosure with the Main Parts Labelled	86
52	The Touchscreen Dashboard During the Field Session at the Creek	87
53	Monitor Tab of the Touchscreen Dashboard with Live Detections (TC_SYS_05)	91
54	Dashboard During an Accumulation Alert (TC_SYS_02, TC_SYS_09)	91
55	Drawing the Monitored Area on the Dashboard (TC_SYS_06)	92
56	History Tab with the Stored Alerts and Snapshots (TC_SYS_08)	92
57	Settings Tab with the Threshold, Camera Stream and Model Options (TC_SYS_10)	93
58	Accumulation Alert Notification on the Android Application (TC_SYS_09)	94
59	Training and Validation Curves of the v10 Model	100
60	Precision-Recall Curve of the v10 Model on the Validation Set	100
61	Normalized Confusion Matrix of the v10 Model on the Validation Set	101

Figure	Title	Page
62	Switching On the Unit with the UPS HAT Power Switch	107
63	Raspberry Pi Desktop After Start-Up	107
64	Monitor Tab with the Live Camera Feed and No Items in the Area	108
65	Accumulation Alert on the Touchscreen with the Limit Set to 3	109
66	Buzzer Module Inside the Enclosure	109
67	History Tab with the Saved Limit-Reached Record	110
68	Accumulation Alert Notification on the Android Phone	111
69	Monitor Tab of the Android Application During the Alert	111
E1	Topic Approval at the Proposal Defense	145
E2	First Day of Prototype Assembly	146
E3	Second Day of Prototype Assembly	147
E4	Third Day of Prototype Assembly	148
E5	First Independent Test for Data Gathering	149
E6	Researchers with the Barangay Officials	150
E7	Field Test at Barangay 870, Pandacan, Manila	151
E8	Second Independent Test and First Accumulation Alert	152
E9	Third Independent Test and Image Collection for Model v10	153
E10	Measuring the Camera Cable from the Barangay Building to the Bridge	154
E11	First Day of Deployment Test	155
E12	Usability Survey with the Barangay Personnel and the Estero Rangers	156
E13	Second Day of Deployment Test	157
E14	Third Day of Deployment Test	158
H1	Web Dashboard Monitor Tab	161
H2	Web Dashboard During an Accumulation Alert	162
H3	Drawing the Monitored Area on the Web Dashboard	163

Figure	Title	Page
H4	Web Dashboard Fullscreen View	164
H5	Web Dashboard in Dark Mode	165
H6	Web Dashboard History Tab	166
H7	Snapshot Viewer on the Web Dashboard	167
H8	Delete Confirmation on the Web Dashboard	168
H9	Web Dashboard Settings Tab	169
H10	Battery Details on the Web Dashboard	170
H11	Connected Phones Panel on the Web Dashboard	171
H12	Network Setup Page of the Raspberry Pi	172
H13	Mobile App Connection Screens	173
H14	Mobile App Monitor Screen	174
H15	Mobile App Fullscreen View	175
H16	Mobile App History Screen	176
H17	Mobile App Settings for Detection, Pi Screen and Buzzer	177
H18	Mobile App Settings for Alerts, Appearance and Connection	178
H19	Mobile App Detail Panels	179
H20	Mobile App Alert Notification	180
H21	Mobile App in Dark Mode	181

LIST OF ABBREVIATIONS

Abbreviation	Definition
AI	Artificial Intelligence
CCTV	Closed-Circuit Television
CNN	Convolutional Neural Network
GPIO	General-Purpose Input/Output
HAT	Hardware Attached on Top
IEC	International Electrotechnical Commission
IoT	Internet of Things
IPO	Input-Process-Output
ISO	International Organization for Standardization
mAP	Mean Average Precision
NCNN	Neural network inference framework for mobile and embedded devices
NVMe	Non-Volatile Memory Express
PCIe	Peripheral Component Interconnect Express
ROI	Region of Interest
RRL	Review of Related Literature
RTSP	Real-Time Streaming Protocol
SDLC	Software Development Life Cycle
SSD	Solid-State Drive
UNEP	United Nations Environment Programme
UN-SDG	United Nations - Sustainable Development Goals
UPS	Uninterruptible Power Supply
YOLO	You Only Look Once
YOLO26n	You Only Look Once version 26 nano

ABSTRACT

Floating garbage that builds up in urban creeks blocks drainage and worsens flooding, yet barangays still rely on walks along the bank to know when a stretch needs clearing. Existing studies detect waste in single images or monitor water levels with sensors, but none counts floating garbage over time within an operator-defined area. This study developed Garbage-Guard, a fixed unit that detects bottles, bags and food containers with a YOLO26n convolutional neural network on a Raspberry Pi 5. It crops the camera feed to a monitored area over the water, tracks each item with ByteTrack, smooths the count over 15 frames and raises an Accumulation Alert on a touchscreen dashboard, a buzzer and an Android application when the count reaches a set threshold. The model was trained over ten runs on a custom dataset, and the system was evaluated under ISO/IEC 25010:2023. On a frozen test set of 807 images, the final model reached a precision of 84.6%, a recall of 67.2% and a mAP@0.5 of 0.744. At a creek in Barangay 870, Pandacan, Manila, the unit ran for 24 hours over six days without a crash, processed each frame in 275ms to 350ms and raised the alert in 10 of 10 trials. Live classification averaged 74.7% and reached 85.0% after the camera was lowered closer to the water, and four end users rated usability 4.40 (Excellent). With its threshold calibrated on site, Garbage-Guard can serve barangays as an early-warning tool, supporting UN Sustainable Development Goals 6, 9 and 11.

Keywords: computer vision, floating garbage detection, YOLO26n, edge computing, Raspberry Pi 5

I. INTRODUCTION

1.1 Background of the Study

Urban waterways such as rivers and creeks act as natural drainage, habitat for wildlife, and channels that carry water through cities. Rapid urban growth and rising populations, however, have sharply increased solid waste generation in many countries, the Philippines among them. Tons of solid waste are produced across the country each day, and part of it reaches waterways through poor disposal practices and inadequate collection services (Development Asia, 2024; UNEP, 2023; World Bank, 2022). Creeks and rivers are also major sinks and carriers of pollution from land to sea, which makes them key sites for pollution monitoring (UNEP, 2023; Acot et al., 2022; World Bank, 2022).

A major environmental problem for urban creeks is the steady dumping of solid waste, especially plastics and other non-biodegradable items. In many urban areas, discarded garbage builds up in waterways and blocks the natural flow of water. Rivers and riverbanks hold the highest concentration of litter among the environments studied, since they act as collection points for debris (UNEP, 2023; Acot et al., 2022; Meijer et al., 2021; World Bank, 2022). Creeks and rivers in the Philippines regularly receive waste from nearby communities, which pollutes the water and degrades the environment (Meijer et al., 2021; Robles & Monjardin, 2025; Victoriano et al., 2022). The buildup also slows the current and causes flooding when drainage channels are blocked.

Garbage in creeks usually comes from poor disposal habits and weak waste management. Studies link river and creek pollution to poorly performing solid waste programs and low public awareness (Development Asia, 2024; UNEP, 2023; World Bank, 2022). Households dump waste from their homes and daily activities straight into drains and waterways that empty into creeks and rivers. These conditions call for better monitoring and waste management.

Several methods have been used to monitor garbage pollution and locate where it accumulates in waterways. Traditional approaches rely on manual inspection, which is slow and labor-intensive, particularly over large areas (Robles & Monjardin, 2025; Magyar et al., 2023; Victoriano et al., 2022). Advances in artificial intelligence and computer vision in recent years have opened many uses for object detection, environmental monitoring among them. You Only Look Once (YOLO) is one example of a real-time detection algorithm (Murat & Kiran, 2025; Yaseen, 2024; Kang et al., 2022). Such technologies already appear in monitoring systems, but many current garbage detection systems depend on satellite imagery or very large datasets and are not optimized for small waterways such as creeks.

Computer vision, deep learning, and real-time monitoring together offer a way past these limitations. YOLO can process camera video streams and detect garbage automatically with good accuracy. It can also be linked to platforms that let environmental managers track the amount of garbage and respond quickly to hazards. This study proposes Garbage-Guard, which applies object detection to a camera feed to identify floating garbage in creeks, count how much has built up, and alert the people responsible once it reaches a set level.

Through computer vision for urban environmental sustainability, the research supports three United Nations Sustainable Development Goals: Goal 6 (Clean Water and Sanitation), Goal 9 (Industry, Innovation and Infrastructure), and Goal 11 (Sustainable Cities and Communities) (United Nations, 2025).

1.2 Objectives of the Study

General Objective

Development of Computer Vision for Creeks Garbage Detection using Convolutional Neural Network and YOLO26.

Specific Objectives

1. To design a computer vision model for creeks garbage detection using a convolutional neural network and YOLO26n, capable of detecting the following, and to evaluate it under Functional Suitability using precision, recall and mAP@0.5 on a held-out test set:
    a. Bottles
    b. Bags
    c. Food Containers
2. To build a prototype system using a Raspberry Pi 5 computer to detect garbage within an operator-drawn region of a creek, to keep track of each piece of garbage to maintain its identity between frames, to count the number of garbage items in the operator-drawn region and to automatically display an alarm on a touchscreen dashboard and an Android app when a threshold number of items (default is 20 garbage items) is reached.
3. To test the system's performance using ISO/IEC 25010:2023, specifically the following characteristics:
    a. **Functional Suitability:** The accuracy of object classification and accumulation.
    b. **Performance Efficiency**: The real-time responsiveness of Raspberry Pi 5.
    c. **Usability:** The system's operability, user interface and the clarity of its accumulation alerts.

1.3 Scope and Limitations of the Study

Scope

This study focuses on the development of Garbage-Guard, an automated, computer vision-based floating garbage detection system deployed on an edge computing device, specifically the Raspberry Pi 5. The primary scope of the system encompasses the following:

- Develop an automated floating garbage detection system, Garbage-Guard, using the YOLO26n algorithm on a Raspberry Pi 5.
- Identify and categorize three specific types of floating solid garbage: Bottles, Bags, and Food Containers.
- Use a custom dataset split 70/10/20 into training, validation and test partitions, with a frozen held-out test set, to achieve a precision of at least 80% with recall and mAP@0.5 reported alongside it.
- Execute item-tracking and region-of-interest logic that counts the floating items present in the monitored area, smoothed over recent frames, and triggers an “Accumulation Alert” once a threshold, by default 20 garbage items, is reached; the threshold is customizable.
- Install a touchscreen dashboard on the unit and offer an Android app for remote alerts, history and settings.
- Conduct a field deployment of the prototype at a local creek in a barangay for real-world environmental testing.
- Evaluate the system’s performance against the ISO/IEC 25010:2023 criteria: Functional Suitability, Performance Efficiency and Usability.

Limitations

The Garbage-Guard system has several technical and environmental constraints:

- The system can only detect waste that is floating on the water's surface, and does not detect sunken waste or waste that may be obscured.
- Only three classes are detected (bottles, bags and food containers); other pollutants such as metal, glass or organic material are not.
- The quality of detection depends on camera placement and lighting; too much or too little light affects recognition.
- The system is limited to monitoring and early warning; it does not collect garbage or analyze water quality.

1.4 Significance of the Study

Garbage-Guard is expected to be useful to different groups who deal with the impact of floating garbage in urban creeks or waterways.

- **Local Government Units (LGUs) and Barangay Officials.** The system helps LGUs and barangay officials plan maintenance work for creeks and waterways by sending alert notifications, capturing a snapshot when garbage builds up and keeping a history of each build-up.
- **Environmental and Flood Control Agencies.** The data collected can help environmental and flood control agencies such as the Department of Environment and Natural Resources (DENR) and the Metropolitan Manila Development Authority (MMDA) in prioritizing and planning for the management of flooding and waste disposal along waterways that lead to the major water bodies.
- **Waste Collection Personnel.** Employees who clear creeks or waterways can save time and make better use of their vehicles and time by knowing the location of garbage buildup and approximately how much garbage is present before heading out.
- **Filipino Residents.** Families living near urban creeks and waterways experience flooding and foul odor when garbage blocks the flow of water and leaves it stagnant. Faster cleanup in response to alerts can help eliminate or reduce these conditions and promote a cleaner and safer environment.
- **TUP Academic Community.** The study shows TUP and the students of the Computer Engineering Technology program how a trained object detection model, deployed on an edge device and linked to a mobile app, can be a low-cost alternative to other computer technologies. It can also be a reference for similar projects.
- **Future Researchers.** The documented design, training process and test results can serve as a base for studies that cover larger water bodies, use other edge computing hardware, and include more classes of garbage.

II. LITERATURE REVIEW

2.1 Conceptual Framework of the Study

Figure 1

Conceptual Framework of Garbage-Guard

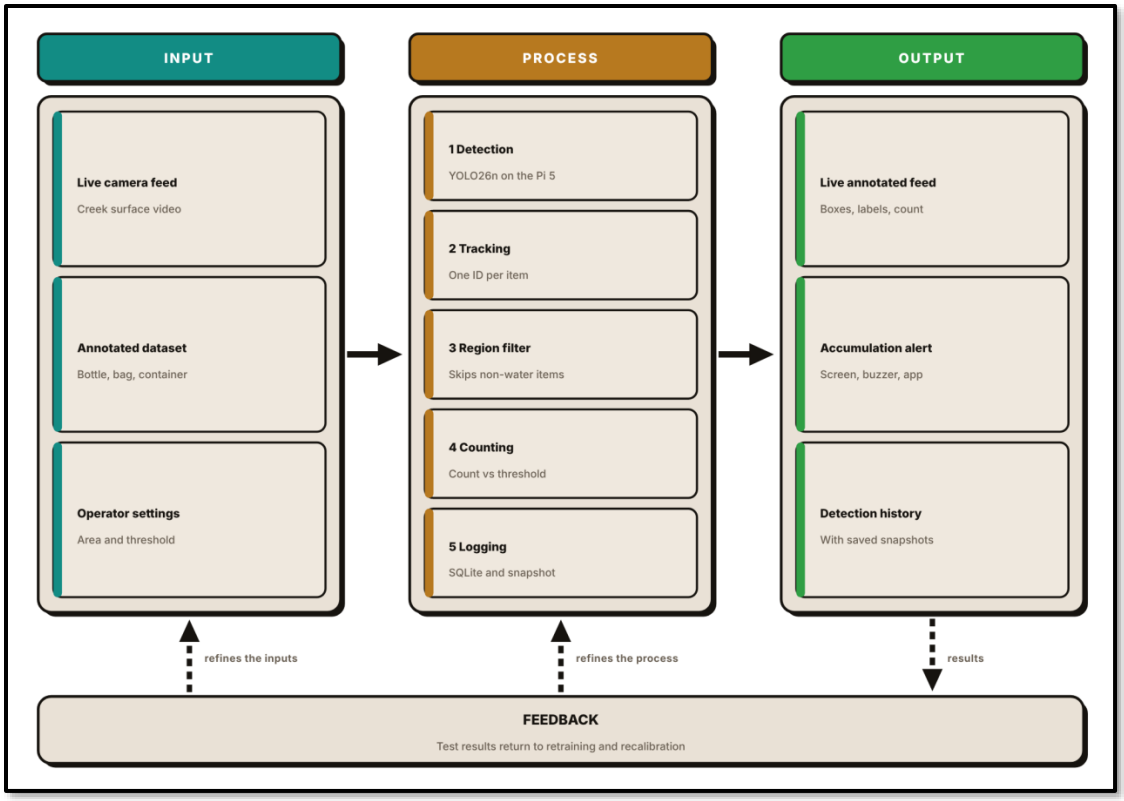


Figure 1 shows the conceptual framework of Garbage-Guard as an Input-Process-Output (IPO) model with a feedback path. The process column is expanded to show every system block, since these blocks are what make the system a monitoring system rather than a frame labeler.

The system has three inputs. The first is the live feed from the network camera mounted above the creek, which supplies frames continuously rather than on a schedule. The second is the annotated dataset, divided into three classes: bottles, bags, and food containers. The third is the set of operator settings: the region of interest drawn on the

water, the number of items that triggers an alert (twenty by default), and the alert preferences.

Processing runs in five stages on a Raspberry Pi 5. Detection uses a YOLO26n convolutional network exported to NCNN, the format the board runs fastest. Tracking keeps one identity per object from frame to frame, so each item holds a steady labeled box instead of flickering in and out of view. Region filtering then discards any detection outside the traced water area, which keeps fixed objects along the bank out of the count. Counting takes the number of objects inside the area in each frame, smooths it as the median of the last 15 frames so that one missed or false detection does not move it, and compares the result with the threshold. Logging writes each alert and its snapshot to a local database and syncs it to the cloud.

The region filter and the smoothed count are what turn a detector into a monitoring system. Twenty bounding boxes in one frame do not prove that twenty objects are present, since a single frame can hold a false detection or miss an object. A system that cannot exclude the bank will also report a concrete wall as garbage for as long as it stays in frame.

The system has three outputs. The touchscreen dashboard shows the live annotated feed with bounding boxes, class labels, and the running count. When the threshold is reached, an accumulation alert appears on screen, sounds on the buzzer, and is sent to the Android app. Every recorded event is kept in a searchable detection history with its own snapshot, so any reading can be checked afterward.

Evaluation follows ISO/IEC 25010:2023 (functional suitability, performance efficiency and usability), and its results feed back into the input and process stages. Weak per-class results lead to further annotation and retraining, latency measured during operation sets the frame sampling rate, and operator comments on the interface guide the design of the dashboard. The feedback path is drawn because it is what happened in this

study: the detection model was trained over several versions, and the accumulation threshold was tuned on site rather than fixed in advance.

2.2 Review of Related Literature and Studies

A. Environmental Garbage Issues in Philippine Waters

According to the United Nations Environment Programme (UNEP, 2023), the World Bank (2022), and Acot et al. (2022), urban waterways such as rivers and creeks are central to the lives of people in urban centers.


However, due to the effects of rapid urbanization and an ever-increasing population, the amount of solid garbage generated has increased over the years, particularly in the Philippines.

The researchers emphasized that a huge volume of garbage generated in the urban area ends up in the waterway due to inappropriate garbage disposal mechanisms. The researchers' study results revealed that waterways are considered accumulation points for solid garbage originating from the surrounding communities.

However, the researchers' study focused on the garbage management policies and environmental effects rather than the technological aspect. These researchers' studies are related to the present research because they emphasized the need to monitor garbage pollution in the waterway, such as a creek.

Figure 2

Cumulative Contribution of Rivers to Global Plastic Emission

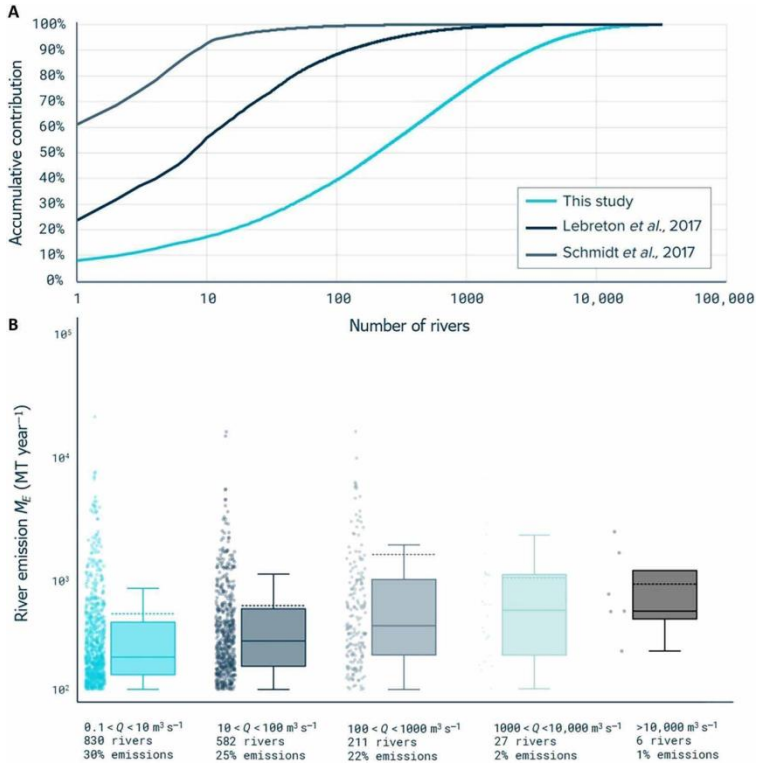

Note. From "More than 1000 rivers account for 80% of global riverine plastic emissions into the ocean," by L. J. J. Meijer, T. van Emmerik, R. van der Ent, C. Schmidt and L. Lebreton, 2021, Science Advances, 7(18). CC BY-NC.

Rivers as the Pathway for Ocean Plastic (Meijer et al., 2021)

According to Meijer et al. (2021), rivers are the main pathways that carry garbage from land to the ocean. The research used global modeling of environmental data to trace the sources and pathways of plastic in the oceans, and it found that a large share of the plastic entering the ocean comes from rivers in heavily populated areas. However, the research relied on data analysis and modeling, which cannot track the build-up of garbage in an individual creek. It relates to the current study because it shows the role of rivers in carrying garbage.

Mismanaged Plastic Waste and Urban Flooding (MacAfee & Löhr, 2023)

MacAfee and Löhr (2023) examined the interaction between mismanaged plastic waste (MPW) and urban flooding under rapid urbanization and climate change. The review indicates that more plastic waste in drainage channels raises the risk of flooding, especially in coastal cities. Its limitation is that it is based on existing literature and offers no technological solution. It is relevant because it emphasizes the need for waste monitoring to prevent environmental and social hazards.

Identifying Plastic Waste in Marine Ecosystems (Das et al., 2025)

According to Das et al. (2025), the paper "Plastic Waste in Marine Ecosystems: Identification Techniques and Policy Interventions" reviewed many research papers on marine plastic waste, focusing on identification techniques and policy interventions. The findings showed that polyethylene and polypropylene are the main types of plastic waste, and that the best ways to identify plastic waste are infrared spectroscopy and AI recognition. The limitation of this research is that it relied only on literature and not on experiments. It is still relevant to the current study because it shows that waste in water can be managed.


Wastewater Management in the Philippines (Corpuz, 2025)

Corpuz (2025) examined the problems of wastewater management in the Philippines, such as a growing population and poor treatment facilities, which leave wastewater untreated and discharged into water bodies. The research used policy and environmental review as its method. Its limitation is that it does not cover technology for monitoring wastewater. It relates to this study because it shows the importance of monitoring water bodies, an objective of Garbage-Guard.

Solid Waste Management and Economic Growth (Ella et al., 2022)

Figure 3

Municipal Solid Waste against Gross Domestic Product per Capita

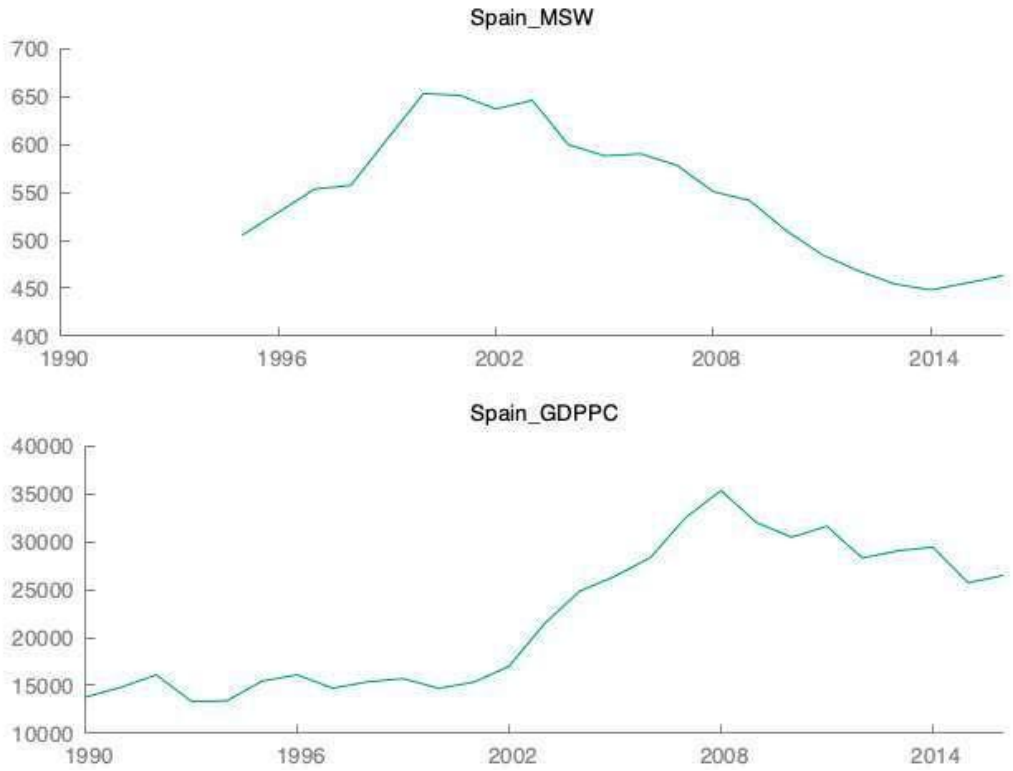


Note. From "The impact of solid waste management to the economic growth in selected OECD countries and Philippines," by D. M. Ella, D. M. Lim, B. Lu and R. Cabauatan, 2022, Journal of Economics, Finance and Accounting Studies, 4(1). CC BY.

The study by Ella et al. (2022) on the relationship between municipal solid waste (MSW) management and economic growth in selected OECD countries and the Philippines revealed that MSW has a positive effect on GDP per capita. However, the effect of recycling varies by country. The limitation of the study is its focus on statistical data rather than real-time waste management. This study is similar because it shows the importance of managing waste.

Plastic and Microplastic Waste in Southeast Asia (Ng et al., 2023)

Figure 4

Weathering and Fragmentation of Plastic in the Marine Environment

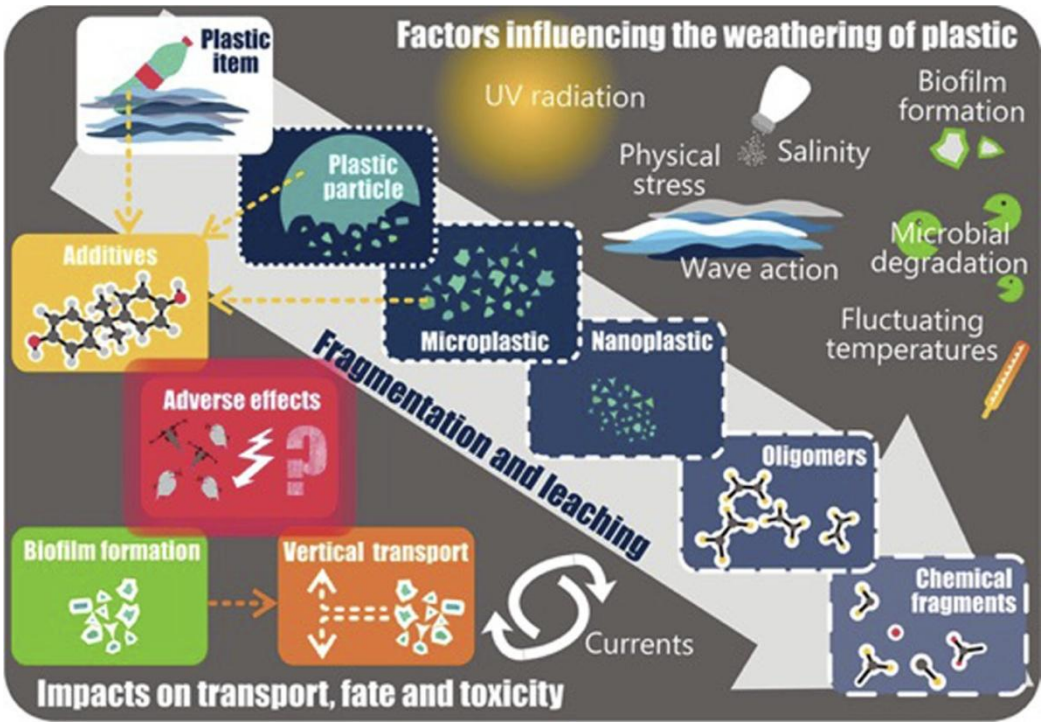

Note. From "Plastic waste and microplastic issues in Southeast Asia," by C. H. Ng et al., 2023, Frontiers in Environmental Science, 11. CC BY.

According to Ng et al. (2023), weak structures and poor waste collection practices in Southeast Asia are increasing plastic pollution in water sources. The research takes a review approach, its data coverage is limited and it depends on secondary sources. It is relevant because it highlights the importance of monitoring and detecting plastic pollution, which Garbage-Guard supports through computer vision.

B. Computer Vision Systems

Floating Object Detection on Edge Hardware (Li et al., 2024)

Figure 5

Floating Objects Detected on a Water Surface




Note. From “Detection of floating objects on water surface using YOLOv5s in an edge computing environment,” by H. Li et al., 2024, Water, 16(1), 86. CC BY.

Li et al. (2024) addressed the problem this study also faces, which is running a detector on hardware small enough to sit beside the water rather than in a server room. Their improved YOLOv5s model raised detection accuracy by 15.7% over the baseline, cut false detections on small targets by 83%, and sustained 33 frames per second on an edge device. Two findings carry directly into Garbage-Guard. The first is that a small YOLO variant is sufficient for floating-object detection, which supports the choice of YOLO26n over a heavier model. The second is that accuracy is lost on small and distant objects, which matches the weakness this study observes at the creek, where floating bags are the least reliably detected class.

Computer Vision Detection and Visual SLAM (Chen et al., 2024)

Figure 6

Success Rates of Visual Tracking Algorithms on a Benchmark Set

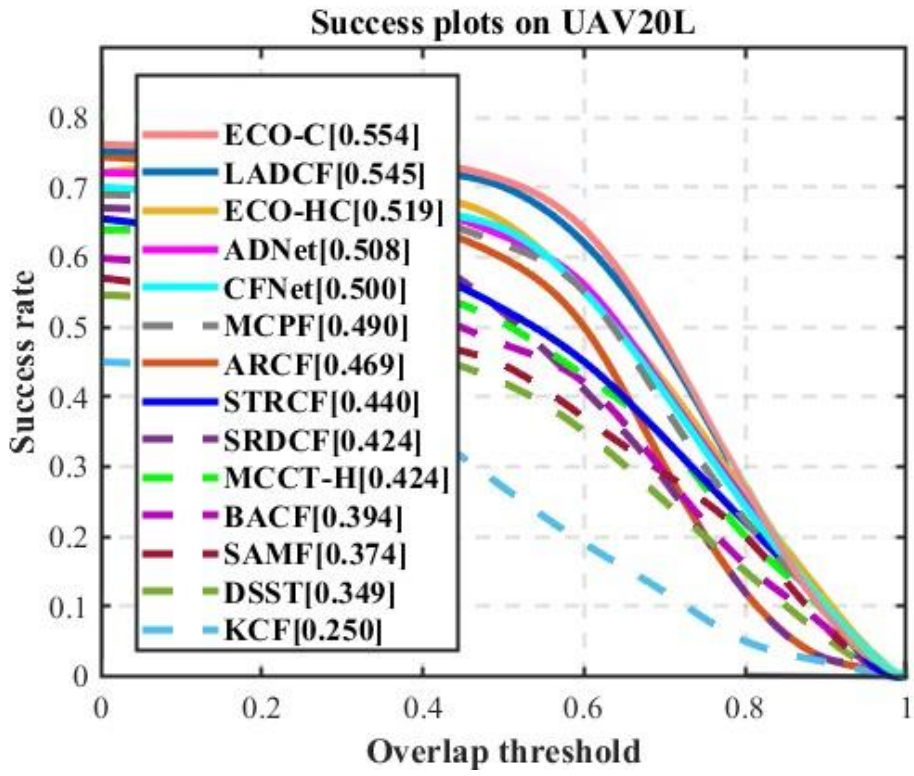


Note. From "A survey of computer vision detection, visual SLAM algorithms, and their applications in energy-efficient autonomous systems," by L. Chen et al., 2024, Energies, 17(20), 5177. CC BY.

Chen et al. (2024) describe computer vision as a foundation of intelligent systems and AI technologies. It can replace traditional sensors as the main source of input data, acting as a pair of intelligent "eyes" that processes data to drive unmanned operations such as autonomous driving, obstacle avoidance, and detection tracking. The study is relevant because the researchers use computer vision to detect waste in creeks in real time.

Detecting and Tracking River-Floating Waste (Nunkhaw & Miyamoto, 2024)

Figure 7

Detection and Tracking Pipeline for River-Floating Waste

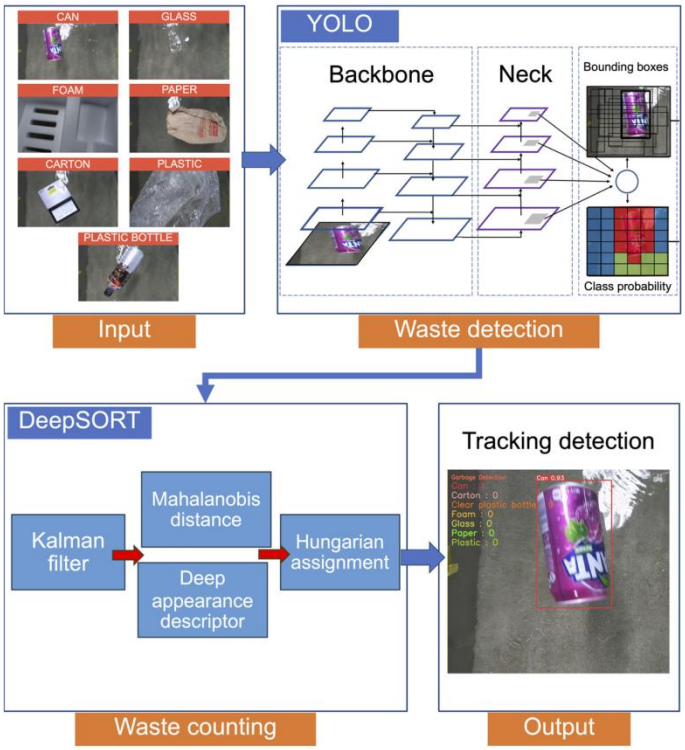


Note. From "An image analysis of river-floating waste materials by using deep learning techniques," by M. Nunkhaw and H. Miyamoto, 2024, Water, 16(10), 1373. CC BY.

Nunkhaw and Miyamoto (2024) combined a YOLOv5 detector with DeepSORT tracking to analyze river-floating waste, reporting a mean average precision at or above 88% and roughly 80% accuracy across three scenarios. Theirs is the published method closest to the one used here, and it makes clear that detection alone is not enough on moving water. An item moving through the frame must keep a single identity in every frame, or it is counted again in each one. Garbage-Guard reaches the same conclusion and solves it the same way, with a tracker, using ByteTrack in place of DeepSORT.

River Waste Detection in Urban Canals (Nunkhaw et al., 2025)

Figure 8

Detection Accuracy in the Laboratory Compared with the Field

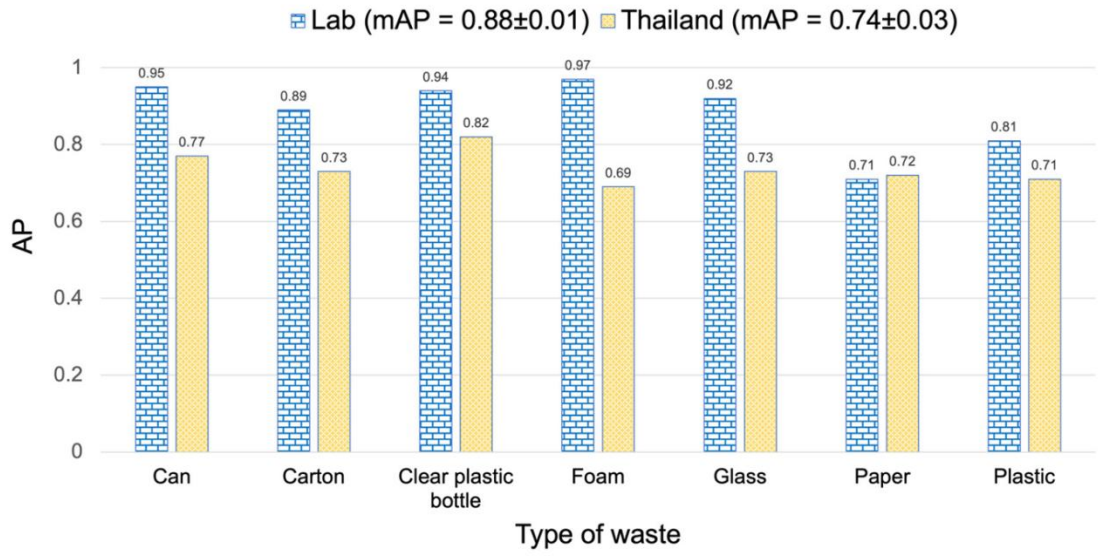


Note. From "Enhancing river waste detection with deep learning and preprocessing: A case study in the urban canals of the Chao Phraya River," by M. Nunkhaw, D. Chitwatkulsiri and H. Miyamoto, 2025, Water, 17(22), 3193. CC BY.

Nunkhaw et al. (2025) extended that work to the urban canals of the Chao Phraya River, training a YOLO detector on laboratory flume images and then adapting it to real canal conditions through a preprocessing pipeline. The study bears on Garbage-Guard in two ways. It is set in Southeast Asian urban waterways, where waste composition and water conditions resemble a Metro Manila creek more closely than European or North American river studies do. It also documents the gap between performance on controlled images and performance in the field, which is the same gap this study reports between its full test partition and its creek-only subset.

An Open Dataset for Floating Litter Detection (Jia et al., 2023)

Figure 9

Floating Litter Images with True and Predicted Labels

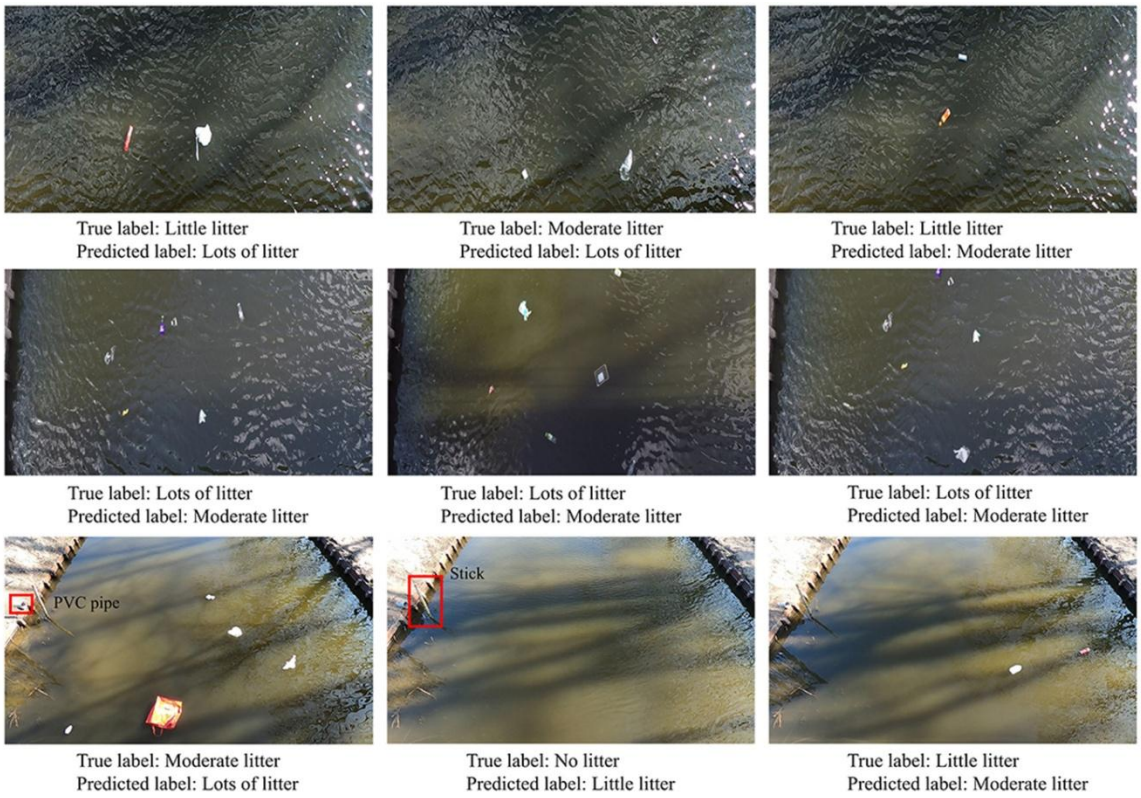


Note. From "Advancing deep learning-based detection of floating litter using a novel open dataset," by T. Jia, A. J. Vallendar, R. de Vries, Z. Kapelan and R. Taormina, 2023, Frontiers in Water, 5. CC BY.

To overcome the lack of public training data for floating litter detection, Jia et al. (2023) created an open training dataset of floating litter and tested the detection performance it supports. The issue they raise is the one that drove the data collection for this study: no available dataset matched the kinds of waste found in Philippine creeks. Their work gives a published reason for building a new dataset instead of adapting an existing one.

Segmentation Compared with Detection for Floating Macroplastic (Kataoka et al., 2024)

Figure 10

Ground Truth Compared with Model Output for Three Waste Classes

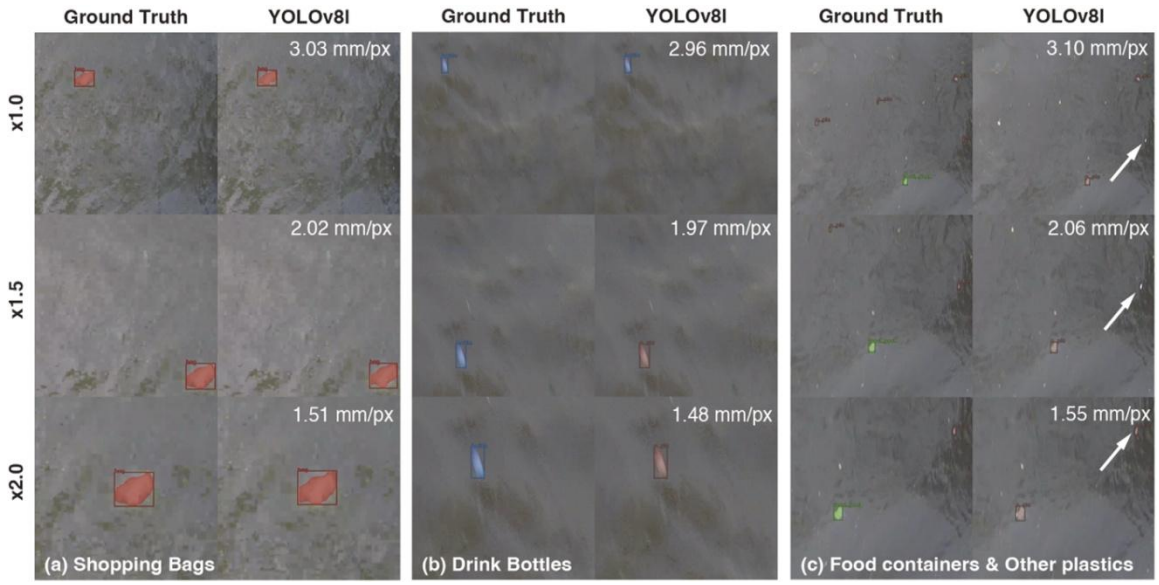

Note. From "Instance segmentation models for detecting floating macroplastic debris from river surface images," by T. Kataoka, T. Yoshida and N. Yamamoto, 2024, Frontiers in Earth Science, 12. CC BY.

Kataoka et al. (2024) compared instance segmentation models for floating macroplastic in river surface images. Segmentation returns a precise outline of each object rather than a rectangle around it, which is more informative but considerably more expensive to compute. Their results support the decision taken here to use bounding-box detection instead. For counting accumulation against a threshold, what matters is the position and identity of an item rather than its exact outline, and the computation saved is what allows the model to run on a Raspberry Pi at the waterside.

Classifying Waste Fragments with Convolutional Features (Nežerka et al., 2023)

Nežerka et al. (2023) addressed the improper sorting of construction and demolition waste, which carries significant environmental and economic costs, by developing a machine-learning-assisted procedure that recognizes waste fragments with

an RGB camera. Their convolutional network reached an overall accuracy of 85.9%, and classifiers built on selected texture features reached up to 92.3%, offering a path to efficient and accurate sorting. The study relates to the present research through its use of computer vision to detect waste.

Lane Detection under Varying Light (Al Noman et al., 2022)


In the study by Al Noman et al. (2022), "A computer vision-based lane detection technique using gradient threshold and hue-lightness-saturation value for an autonomous vehicle," the system uses computer vision to identify road lines. The left and right lanes are found with a sliding-window search. The system works with 96% accuracy and a positive rate of 0.640%. Its accuracy and efficiency could be improved by adding computing features and applying deep learning algorithms.

Object Detection in Overhead Imagery (Kang et al., 2022)

According to Kang et al. (2022), computer vision has improved the processing of objects in high-resolution overhead images from drones, airplanes, and satellites. It has been applied to crop analysis, economic analysis, and disaster tracking. Object detection in overhead images remains difficult, however, because of image volume, resolution, small object size, and complex backgrounds.

Figure 11

Overhead Imagery of the Kind Used for Object Detection

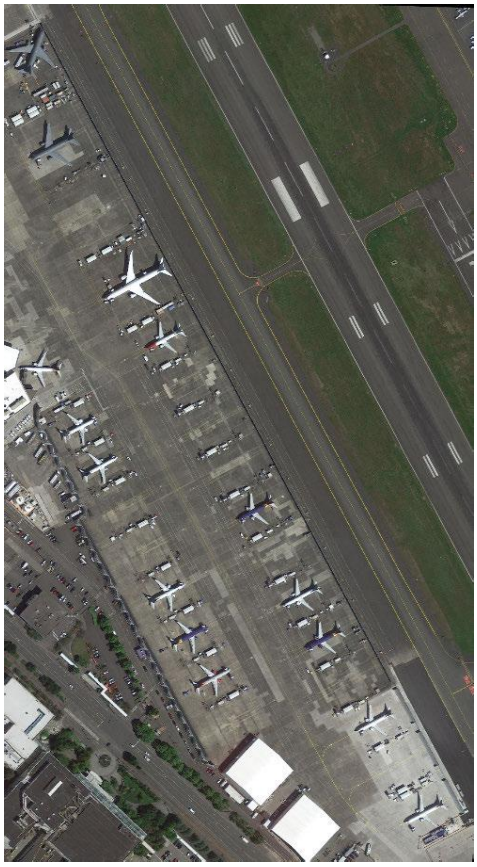

Note. From "A survey of deep learning-based object detection methods and datasets for overhead imagery," by J. Kang, S. Tariq, H. Oh and S. S. Woo, 2022, IEEE Access, 10. CC BY.


A Review of YOLO Versions for Object Detection (Murat & Kiran, 2025)

Murat and Kiran (2025) described how deep learning transformed object detection algorithms. YOLO is among the most popular, known for fast and accurate real-time detection. The authors reviewed YOLO versions from YOLOv1 to YOLOv11 and described the changes in architecture and performance across them.

The Internal Architecture of YOLOv8 (Yaseen, 2024)

Figure 12

Architecture of the YOLOv8 Detector

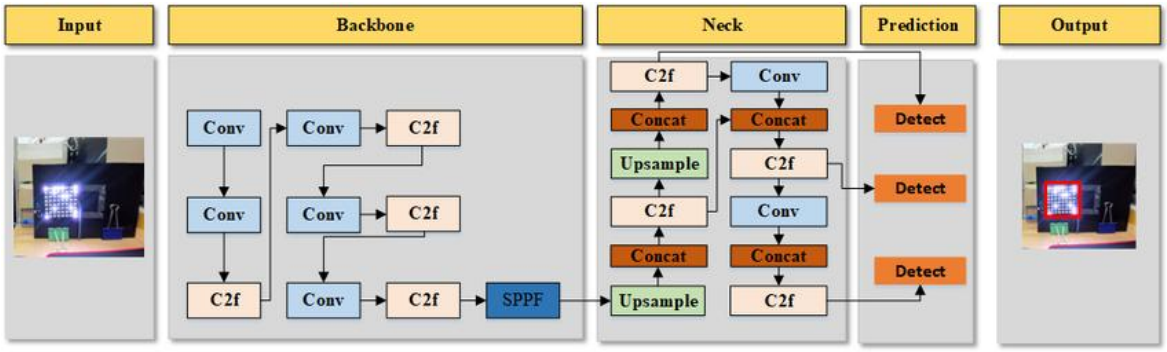

Note. From "What is YOLOv8: An in-depth exploration of the internal features of the next-generation object detector," by M. Yaseen, 2024, arXiv. CC BY.

Yaseen (2024) examined YOLOv8 and its advances over earlier versions. It uses architectures such as CSPNet and FPN+PAN together with an anchor-free design to improve feature extraction and multi-scale detection. Evaluations on several datasets, including Microsoft COCO, show its accuracy and real-time detection capability.

C. Smart Environmental Monitoring Systems

Real-Time Environmental Monitoring with IoT Sensors (Narayana et al., 2024)

In the research conducted by Narayana et al. (2024), environmental conditions are made up of both living and non-living components that affect human life. The non-living components include land, water, stones, atmosphere etc., and living components include organisms like plants, woodlands, fisheries and wildlife etc. Environmental parameters, like temperature, humidity, pressure, air quality, greenhouse gases, wind speed and direction, rainfall, soil pH, soil moisture, water availability, light, turbidity, etc., influence people's lives, especially in the case of workers who practice activities such as agriculture, navigation, traveling, and mining.

In addition to that, to address the issue of monitoring environmental variables and to mitigate the challenges that come with monitoring environmental parameters, IoT

technology was used to develop IoT-based smart environmental monitoring systems. This technology uses microcontrollers and other technologies to monitor environmental parameters from different locations and send the data to a website for monitoring and observation remotely using IoT technology. IoT technology is a dynamic system that observes and responds to environmental variables and conditions (Narayana et al., 2024).


Sensors in Smart City Systems (Zeng et al., 2024)

In the study of Zeng et al. (2024), the integration of IoT technology into smart city systems has several advantages in the management of the environment, as it allows real-time monitoring of important parameters such as air quality, water quality, noise levels, soil quality, and others. This has enabled city administrators to proactively manage the resources of the city in a cost-effective manner. These parameters have collectively proven the importance of IoT sensors in achieving sustainability in the environment.

IoT and Artificial Intelligence in Air Quality Monitoring (Garcia et al., 2025)

Figure 13

Selection of Studies for a Systematic Review of Air Quality Monitoring

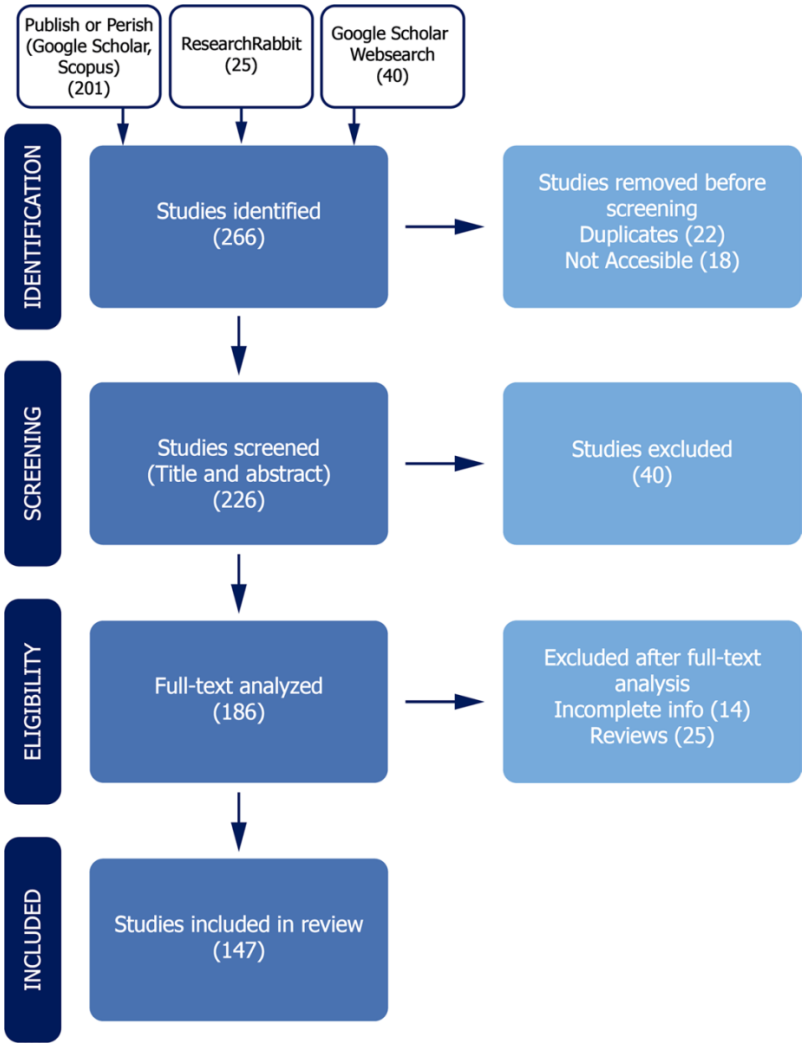

Note. From "Advancements in air quality monitoring: A systematic review of IoT-based air quality monitoring and AI technologies," by A. Garcia, Y. Saez, I. Harris, X. Huang and E. Collado, 2025, Artificial Intelligence Review, 58. CC BY.

Garcia et al. (2025) show how Internet of Things (IoT) technologies have improved environmental monitoring, with networks of low-cost sensors producing large volumes of real-time air quality data. Pairing these IoT systems with machine learning and deep learning makes environmental assessment as accurate as possible. IoT-based

systems can monitor air quality parameters such as PM, CO_2, NO_2, ozone, and VOCs, which makes them an efficient means of thorough environmental surveillance. Integrated IoT and artificial intelligence systems show how such tools can improve environmental management decisions.


Machine Learning and IoT for Pollution Prediction (Gryech et al., 2024)

In the recent literature of Gryech et al. (2024), it has been observed that there is a rising trend towards the inclusion of IoT technologies with machine learning methods for better outdoor air pollution prediction and forecasting. Though the traditional air pollution stations are accurate, the high cost of these stations has encouraged the development of IoT-based low-cost sensors, along with machine learning methods that are capable of predicting the levels of outdoor air pollution through time-series, feature-based, and spatio-temporal methods, although the limitations of the lack of diversity in the data and the context-specific features have to be addressed, as identified by the recent literature.

Urban Flood Monitoring with LoRaWAN Sensors (Te et al., 2024)

Figure 14

Water Level and Pressure Recorded during a Rainfall Event

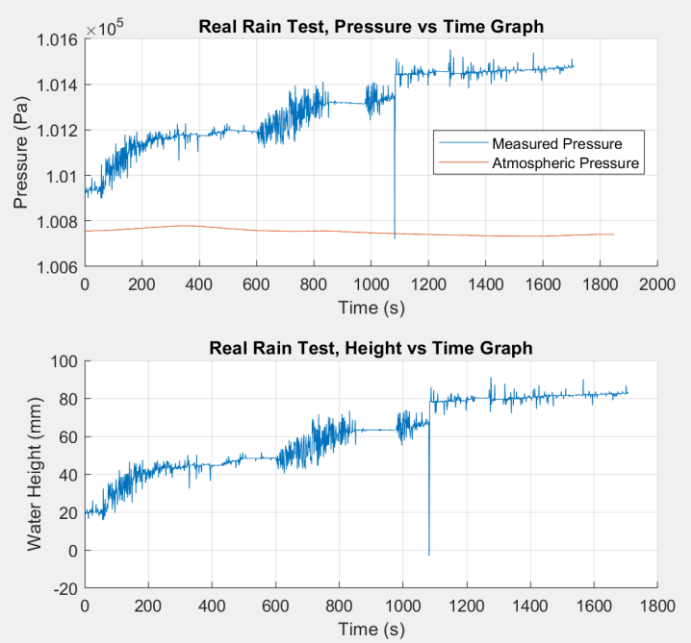


Note. From "A smart IoT urban flood monitoring system using a high-performance pressure sensor with LoRaWAN," by M. C. L. Te et al., 2024, HighTech and Innovation Journal, 5(4). CC BY.

Flooding is a significant environmental problem in the Philippines, driven by monsoon rains, local topography, and inadequate drainage. It causes heavy loss of life and property, especially in urban areas. To reduce delays in flood monitoring, Te et al. (2024) proposed a smart IoT-based flood monitoring system for an urban area that combines efficient pressure sensors, LoRaWAN, and solar power. Their review of the background shows a need to apply IoT to disasters, since efficient monitoring would improve flood response (Te et al., 2024).

Secured Flood Monitoring and Forecasting (Arante et al., 2025)

Figure 15

Neuro-Fuzzy Network for Flood Forecasting

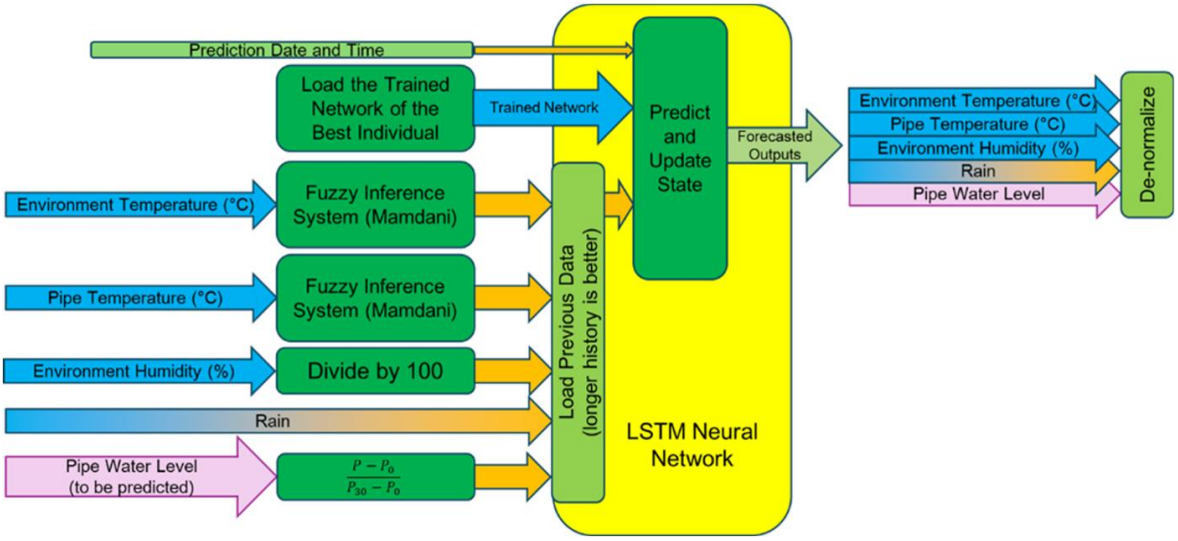

Note. From "Development of a secured IoT-based flood monitoring and forecasting system using genetic-algorithm-based neuro-fuzzy network," by H. R. C. Arante et al., 2025, Sensors, 25(13), 3885. CC BY.

The monitoring and forecasting of floods in the Philippines are important due to the occurrence of heavy rains and typhoon scenarios, which cause the rapid rise of water levels. In this regard, Arante et al. (2025) contextualized their research by highlighting the limitations of the existing flood monitoring systems, which are not effective in the Philippines, and the need to develop a secure IoT infrastructure to transmit data on water levels to aid in the prediction of floods. The authors proposed a neuro-fuzzy LSTM machine learning model to improve the accuracy of flood event prediction, which is a form of smart environmental monitoring system in a water-related disaster scenario.

2.3 Review of Related Patents

Table 1

Table of Related Patents

Patent Title	Author	Adopted Feature	Enhanced Feature
Garbage Detection Method, Related Equipment and Device	Li & Wang (2020)	Image recognition to detect garbage	Enables automatic garbage detection in areas.
Vision garbage classification system based on TensorFlow	Wu et al. (2019)	The AI system classifies garbage using TensorFlow.	Uses a similar AI system and improves garbage recognition with a deep learning model, YOLO26n
Smart City Waste Collection and Management using IoT	Chordiya et al. (2020)	IoT sensors monitor garbage collection systems.	Using a camera for real-time monitoring of garbage
Cleaning Unit Using Deep Learning for Floating Trash Detection	*Kim et al.* (2019)	Uses object detection to identify trash	Enhances garbage identification using AI algorithms.
Drainage monitoring apparatus and system	Campbell et al. (2022)	Water level sensors monitor drainage conditions and detect faults.	Detects garbage as a cause of drain blockage in waterways.
System for monitoring water drainage	Den Hartog & Voncken (2017)	Sensors monitor water levels in drain systems.	Detects water blockage and water conditions.
Detection and monitoring of waste disposal using artificial intelligence	Liu et al. (2022)	AI monitors garbage in the environment	Tracks garbage data using automated analysis.
Flood warning system	Torres et al. (2024)	Sensors detect rising water levels.	Alerts users when garbage build-up may cause flooding
Method and System for Flood Early Warning in Smart Cities Based on the Internet of Things	Shao et al. (2023)	IoT sensors monitor rainfall and water levels	Garbage detection as an early indicator of flooding risk
Apparatus and Method for Waste Monitoring and Analysis	Balachandran & Talavera (2023)	Sensors and cameras monitor garbage levels in containers.	Automates garbage detection using computer vision

Figure 16

Garbage Detection Method, Related Equipment and Device

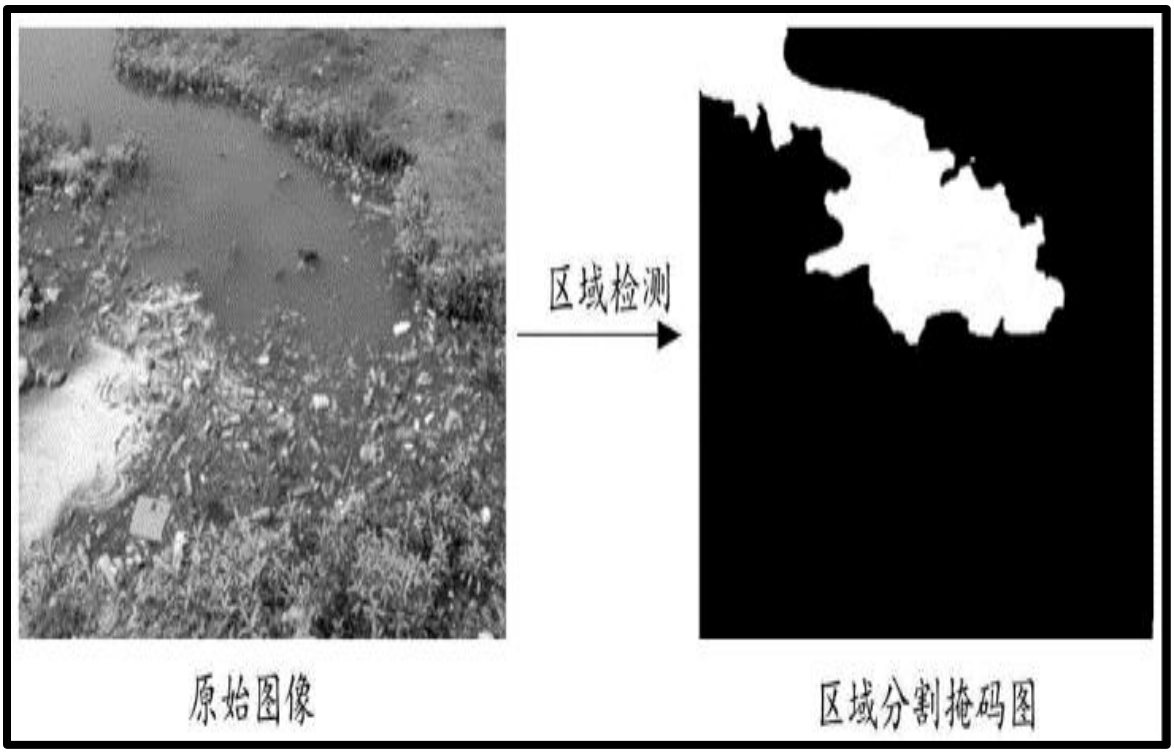


Figure 16 shows a garbage detection method using image recognition, patented by Li and Wang (2020) in China. The system takes pictures of monitored rivers and processes them to find garbage.

This technology can be used in different urban areas such as lakes and parks. It analyzes captured images to determine whether garbage is visible in the scene. The patent relates to Garbage-Guard because it uses computer vision to detect garbage, as the researchers' system does in creeks.

Figure 17

Vision Garbage Classification System and Classification Method Based on TensorFlow

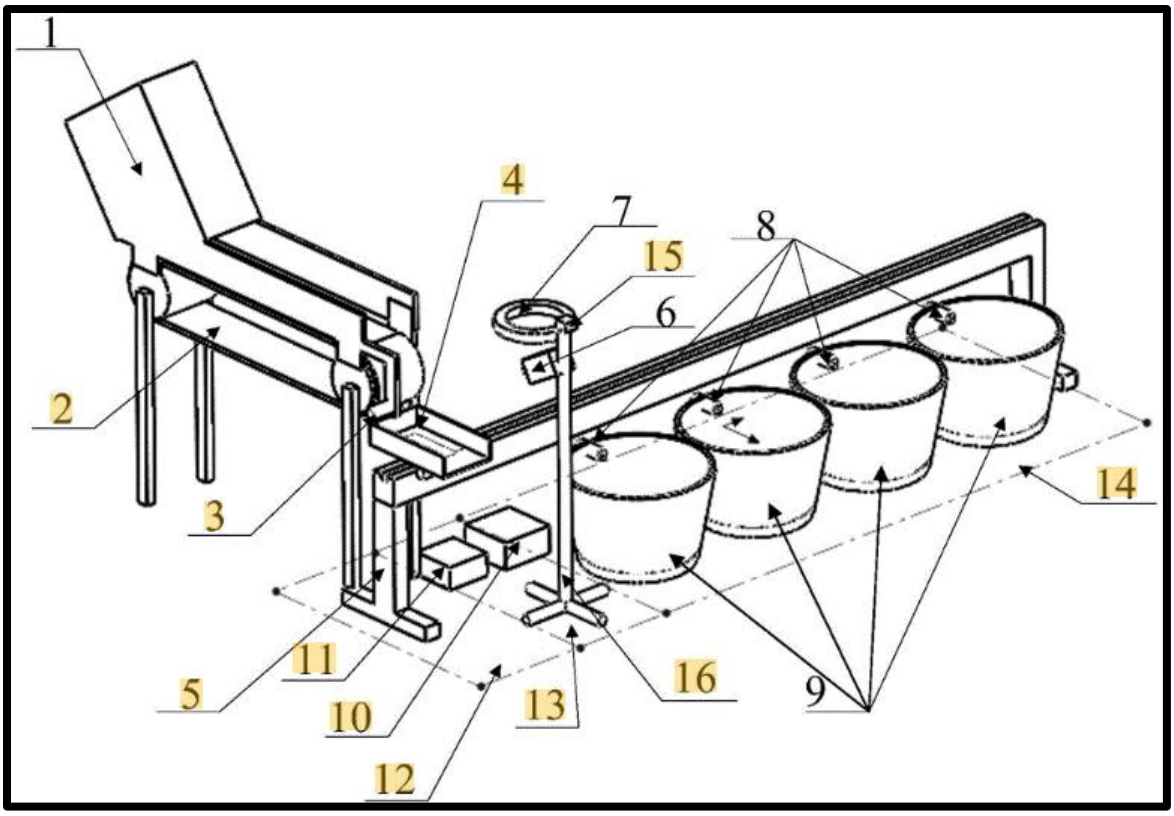


Figure 17 shows the Vision Garbage Classification System and Classification Method Based on TensorFlow by Wu et al. (2019), a patent that uses computer vision. The system feeds images of garbage items into a model trained on garbage images. Its methods include data collection, image processing and automatic classification of garbage categories.

This patent is similar to the present study because it also applies computer vision and machine learning to automated garbage detection.

Figure 18

WCM-Smart City: Waste Collection and Management under Smart City Using IoT

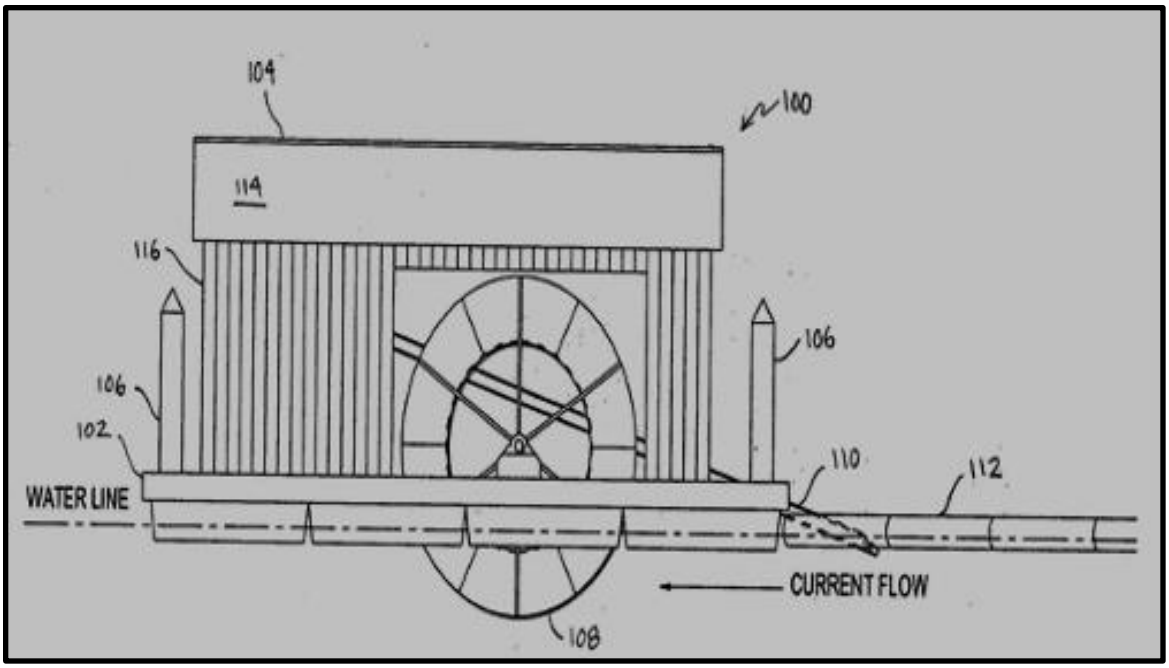


Figure 18 is a patent by Chordiya et al. (2020) for a waste collection system made for gathering garbage in rivers and streams. This invention uses a conveyor mechanism that collects waste and transports it into a container. It incorporates monitoring systems with sensors that detect waste levels and can transmit that information to a platform.

This patent demonstrates automated methods for managing garbage, and it is similar to the researcher's Garbage-Guard system that aims to find garbage in creeks using computer vision technology.

Figure 19

Cleaning Unit Using Deep Learning for Floating Trash Detection

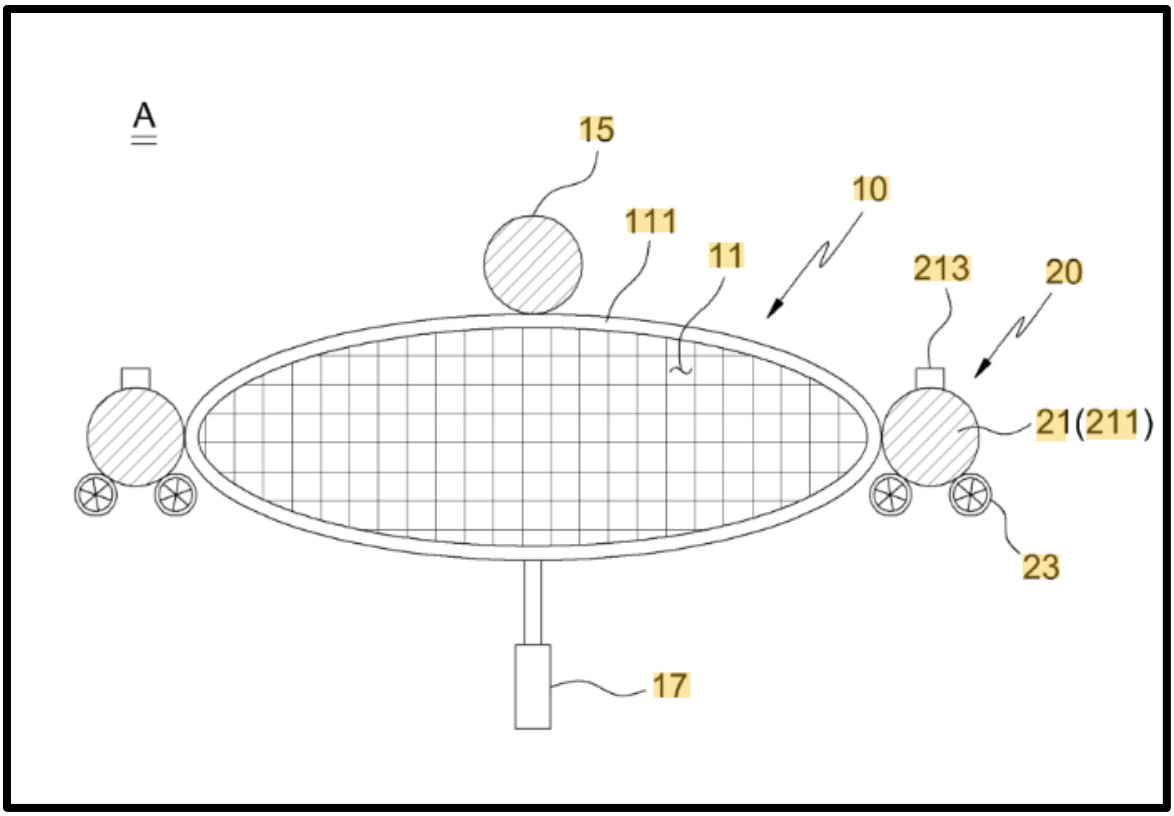


Figure 19 is a related patent from South Korea by Kim et al. (2019): a water-surface cleaning unit that uses deep learning to detect floating garbage. The system integrates a camera module with a deep-learning model which helps in locating garbage on water surfaces. Then, it activates a mechanism that collects the debris from the water.

This invention is relevant to the present study because it also uses artificial intelligence to detect garbage on water.

Figure 20

System for Monitoring Water Drainage

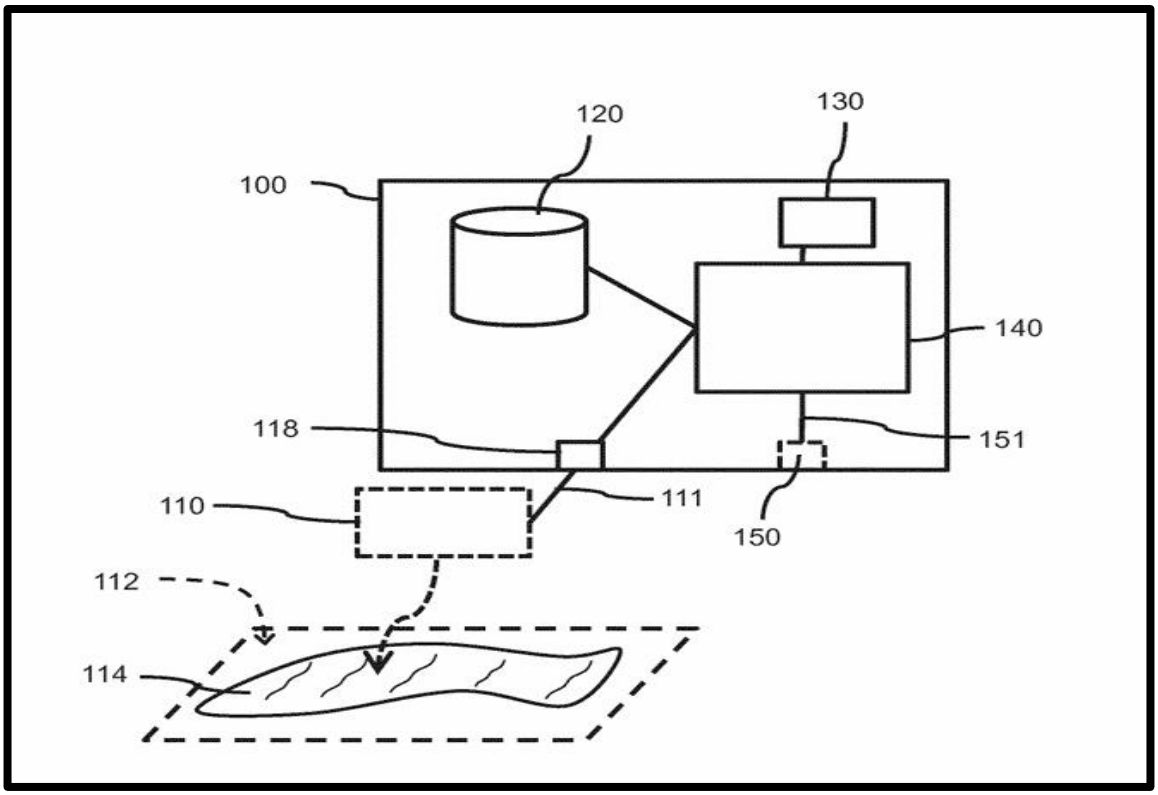


Figure 20 shows a smart drainage patent by Den Hartog and Voncken (2017), a system that monitors water drainage with environmental sensors. The system collects data on water present on surfaces and compares it with predicted water drainage conditions based on what happens during rainfall. If the detected water remains longer than usual, the system makes warning signals about potential drainage problems.

This type of technology integrates sensors, weather information, and data processing to check drainage conditions. This type of patent is related to Garbage-Guard because both systems monitor water environments; Garbage-Guard does so by detecting garbage that collects in creeks and may cause drainage problems.

Figure 21

Drainage Monitoring Apparatus and System

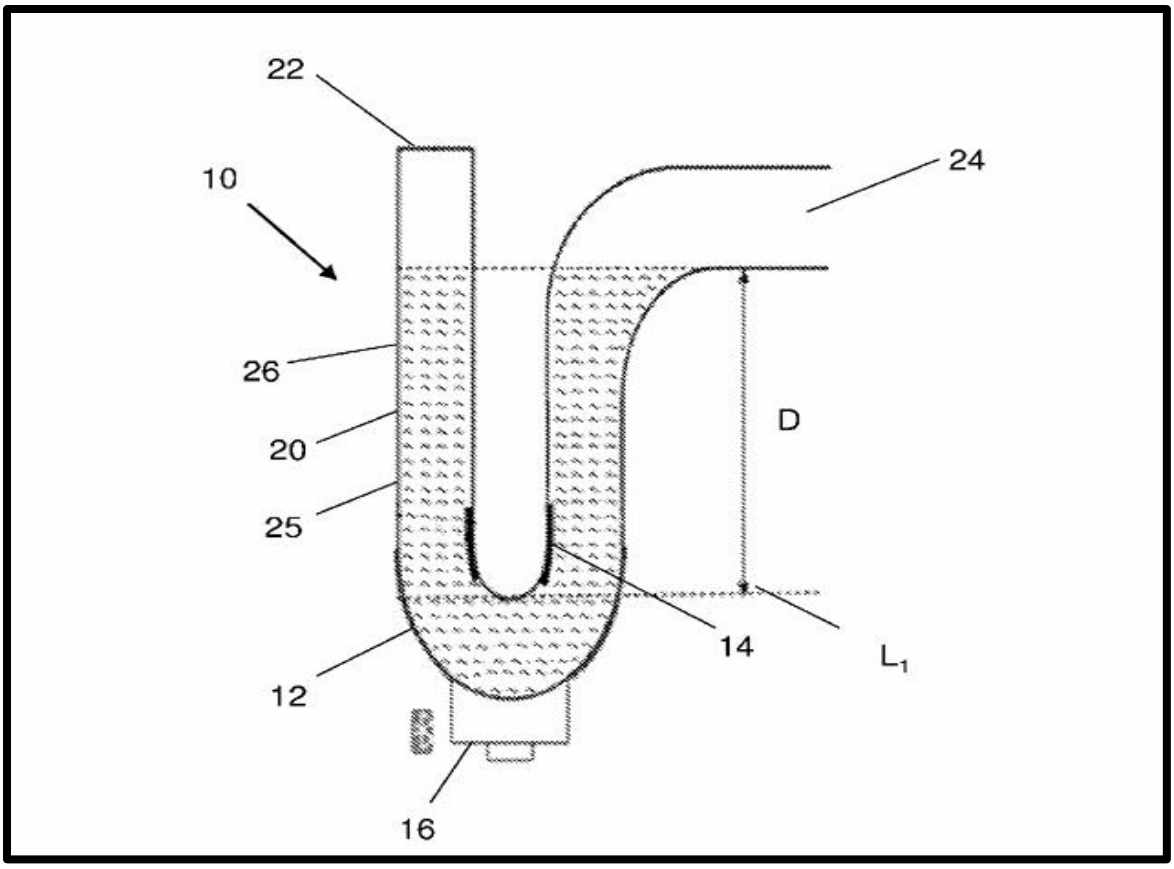


Figure 21 is another smart drainage monitoring patent, by Campbell et al. (2022), which describes a drain monitor apparatus designed to look at water levels within building drainage systems. The invention uses a water trap equipped with a water level sensor that checks the level of water inside the drainage trap. When the water level drops to a specific point, the sensor sends a signal to a system or mobile application that can make audible alerts to inform that there are drainage faults.

This technology relates to Garbage-Guard because both monitor drainage systems. Instead of water levels, however, Garbage-Guard uses computer vision to detect the amount of garbage in creeks.

Figure 22

Detection and Monitoring of Waste Disposal Using Artificial Intelligence

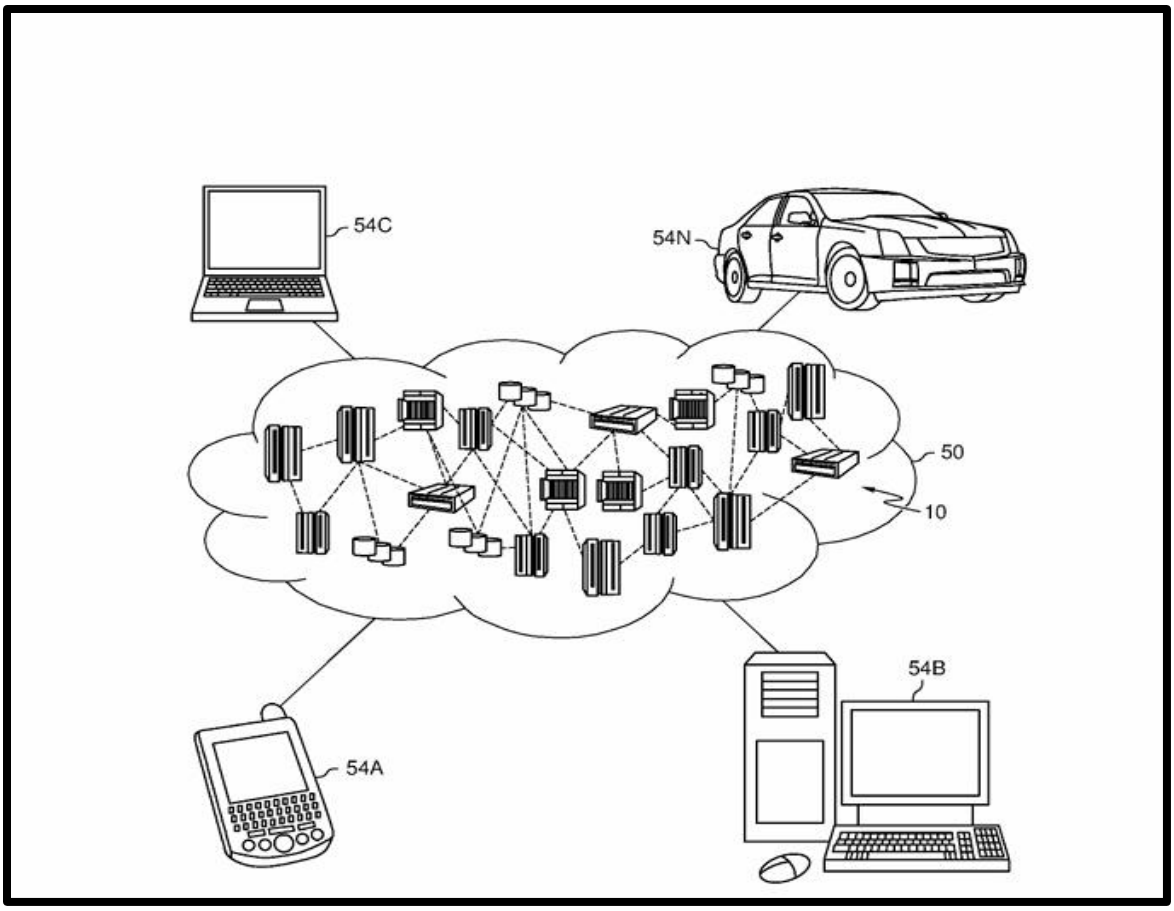


Figure 22 is a patent by Liu et al. (2022) for an artificial intelligence system that detects waste in places such as natural environments. The system collects images with sensors or cameras and passes them to machine learning algorithms that identify waste objects. Then, the system tracks waste accumulation patterns and finds the location and size of garbage in monitored areas.

This patent is similar to Garbage-Guard's usage of Artificial Intelligence and image analysis to find garbage in different locations.

Figure 23

Flood Warning System


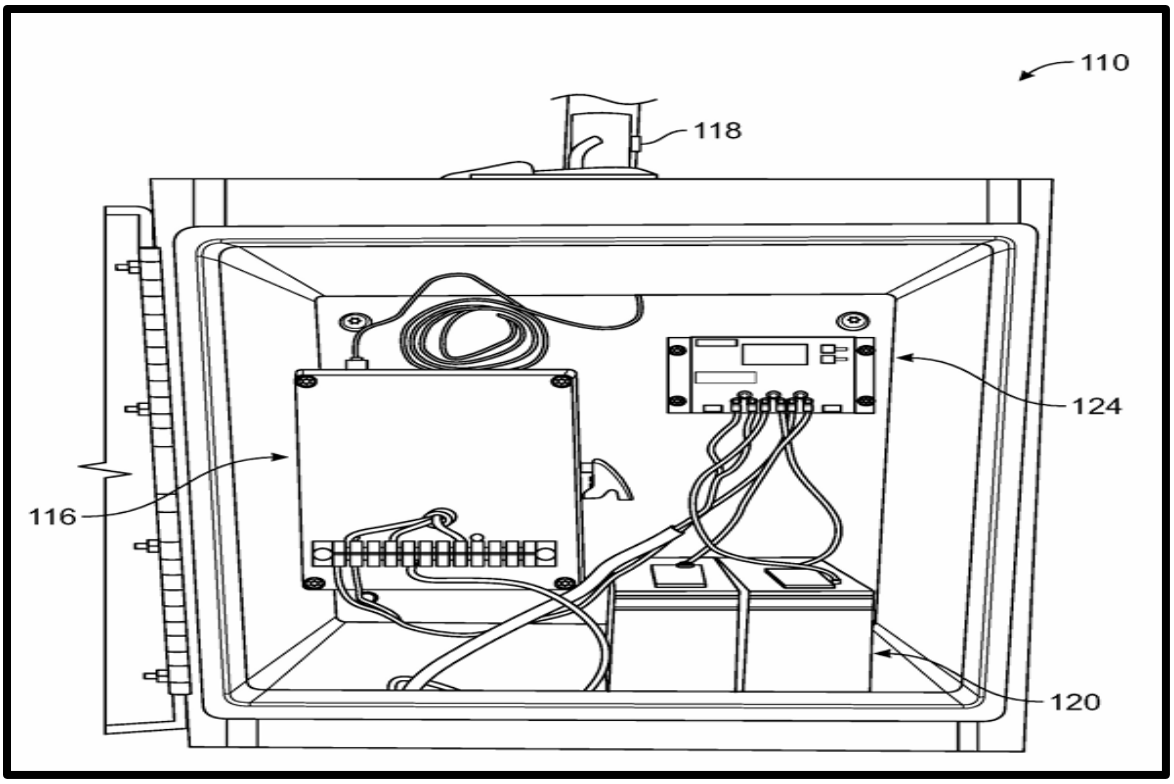


Figure 23 is a patent by Torres et al. (2024) for a flood warning system that gives early warnings of floods. It places monitoring stations near rivers or drainage channels, each equipped with sensors for water level and rainfall. The collected data is sent wirelessly to a flood warning station, where it is checked against water-level thresholds. When a flood risk is found, the system sends visual alerts to users' mobile devices.

This patent is useful and similar to Garbage-Guard's system, since warning systems are important in monitoring the environment and can notify when the creeks are filled with garbage.

Figure 24

Method and System for Flood Early Warning in Smart Cities Based on the Internet of Things

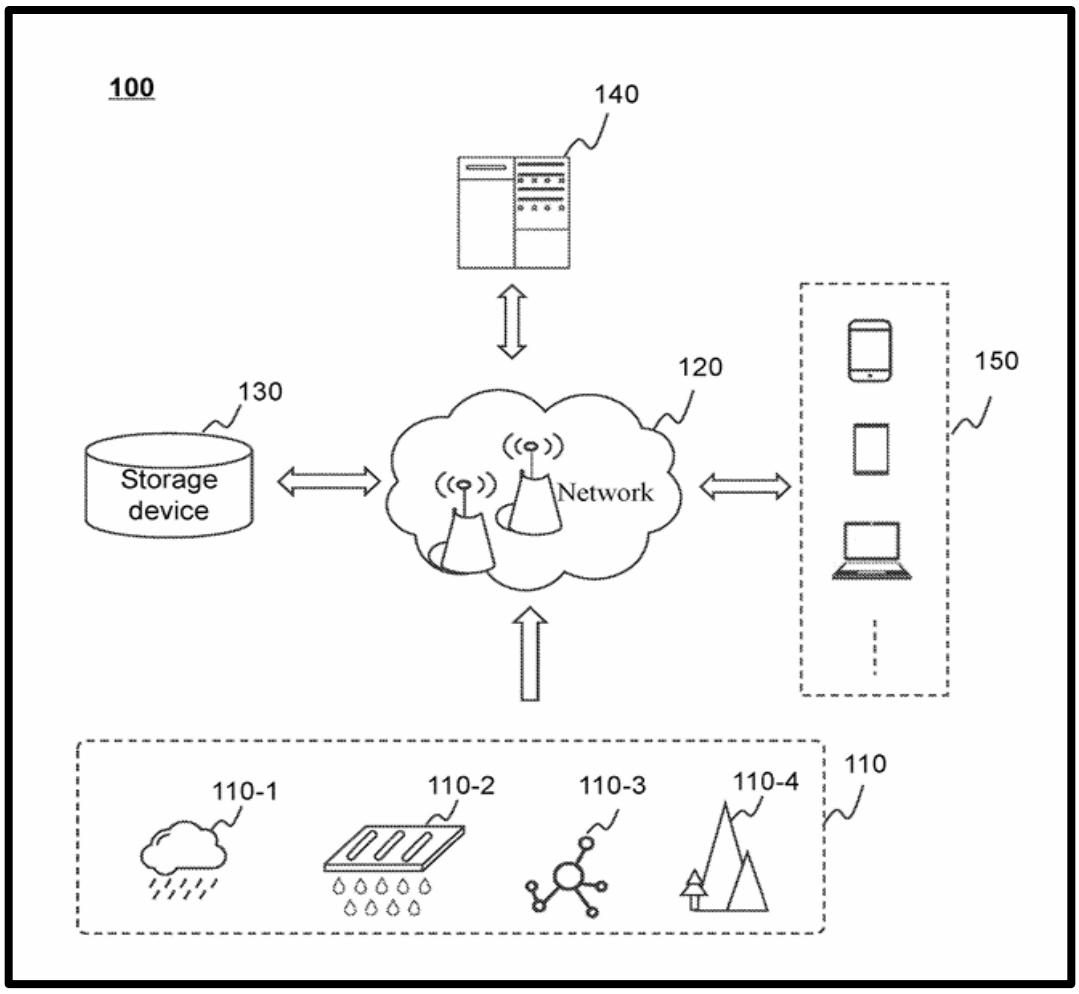

The patent in Figure 24, by Shao et al. (2023), describes a smart flood early warning system that uses Internet of Things (IoT) data to detect potential flooding in urban areas. The system collects precipitation information from weather stations and combines it with sensor data to estimate the water level in specific areas.

This invention is similar to Garbage-Guard in that both involve environmental monitoring and alerts.

Figure 25

Apparatus and Method for Waste Monitoring and Analysis

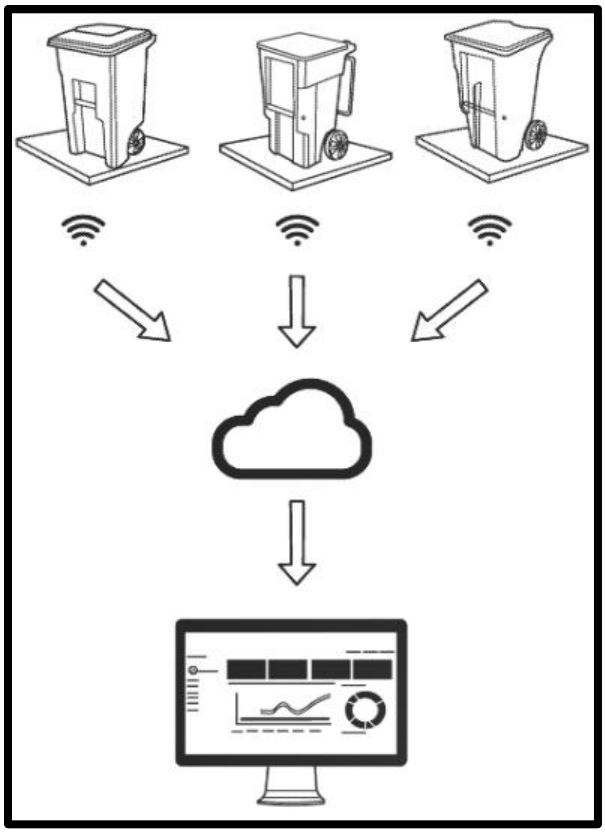


Figure 25 is a patent by Balachandran and Talavera (2023) for a waste monitoring and analysis system that analyzes waste collected in containers. It uses sensors such as load cells and cameras to measure the weight and type of waste placed in bins. The data is sent to a cloud platform for analysis, which identifies patterns in waste disposal and produces reports on waste generation.

This patent is relevant to Garbage-Guard because it shows how sensor-based systems can monitor and analyze data in real time. Garbage-Guard, by contrast, detects garbage collecting in creeks using computer vision.

2.4 Synthesis of the Review

The literature reviewed in this chapter converges on four points. First, a large volume of plastic enters the ocean through rivers. Meijer et al. (2021) state that more than

1000 rivers are responsible for 80% of riverine plastic emissions, and Southeast Asia (Ng et al., 2023) and the Philippines (Corpuz, 2025) are among the places where collection infrastructure falls short. The problem this study addresses is therefore a documented and measured one rather than a local inconvenience.

Second, manual inspection does not scale. Studies that have tried to quantify waste in waterways depend on a survey campaign, a satellite pass or a modelled estimate, none of which gives the operator a reading to act on the same afternoon.

Third, convolutional object detection is mature enough for the task. Murat and Kiran (2025) and Yaseen (2024) report the accuracy and speed improvements of all the YOLO versions over the past 10 years, while Nežerka et al. (2023) show a convolutional classifier recognizing waste fragments with 85.9% accuracy, although selected texture features scored higher on their task. Detection of floating waste is not an open research question.

Fourth, the supporting pieces exist separately. Li et al. (2024) present a ‘Very small YOLO’ (VsYOLO) that identifies floating objects at 33fps on an edge device. Nunkhaw and Miyamoto (2024) combine detection with tracking so that an item passing through the frame is counted only once. Nunkhaw et al. (2025) extend this work to urban canals in Southeast Asia and report the gap between lab and field results. Jia et al. (2023) address the shortage of public floating-litter data, and Kataoka et al. (2024) compare segmentation with bounding-box detection. Narayana et al. (2024), Zeng et al. (2024), and Te et al. (2024) show that environmental sensing on limited hardware with real-time alerting is common.

None of the studies examined here draw the components together in the way needed for this project. The waste-detection work classifies images without tracking build-up over time. The accumulation work measures waste in containers rather than on moving water. The environmental monitoring work alerts on scalar sensor readings rather than on a count of items. None of the systems reviewed runs an operator-trained detector

at the edge at creek level, limits the count to an operator-defined area of water, keeps one identity per item across frames and raises a threshold alert on that count. Table 2 sets out that gap against what this study proposes.

Table 2

Proposed Solution Matrix


Limitation in the examined literature	**Representative source**	**How Garbage-Guard responds**
Waste is classified frame by frame, with no measure of build-up over time.	Nežerka et al. (2023); Magyar et al. (2023)	The objects in the monitored area are counted, smoothed across 15 frames and compared to an operator-set threshold; thus, the output is a sustained accumulation reading and not a label per frame.
Waterway monitoring requires manual survey or satellite passes, which results in the readings being periodic.	Meijer et al. (2021); Victoriano et al. (2022)	Continuous processing and monitoring of a fixed camera feed, and logging of every event with the time recorded on site.
Counting systems assume a contained, static scene	Balachandran and Talavera (2023)	Region filtering helps to limit the counting within the traced region of water, and tracking helps to maintain a one-to-one correspondence between one floating object and one identity.
Alerting in the environment is based on scalar thresholds on sensors and not visual observation and evidence	Te et al. (2024); Arante et al. (2025)	The alert is based on a visual count and includes a saved snapshot, so the reading that triggered the alert can be viewed.
Detection models are published on curated datasets and not deployment conditions	Li et al. (2024); Nunkhaw et al. (2025)	The model is reported on a frozen held-out partition, and a creek-only subset, so field performance is reported separately.

III. METHODOLOGY

3.1 Project Design

Figure 26

Garbage-Guard's System Architecture

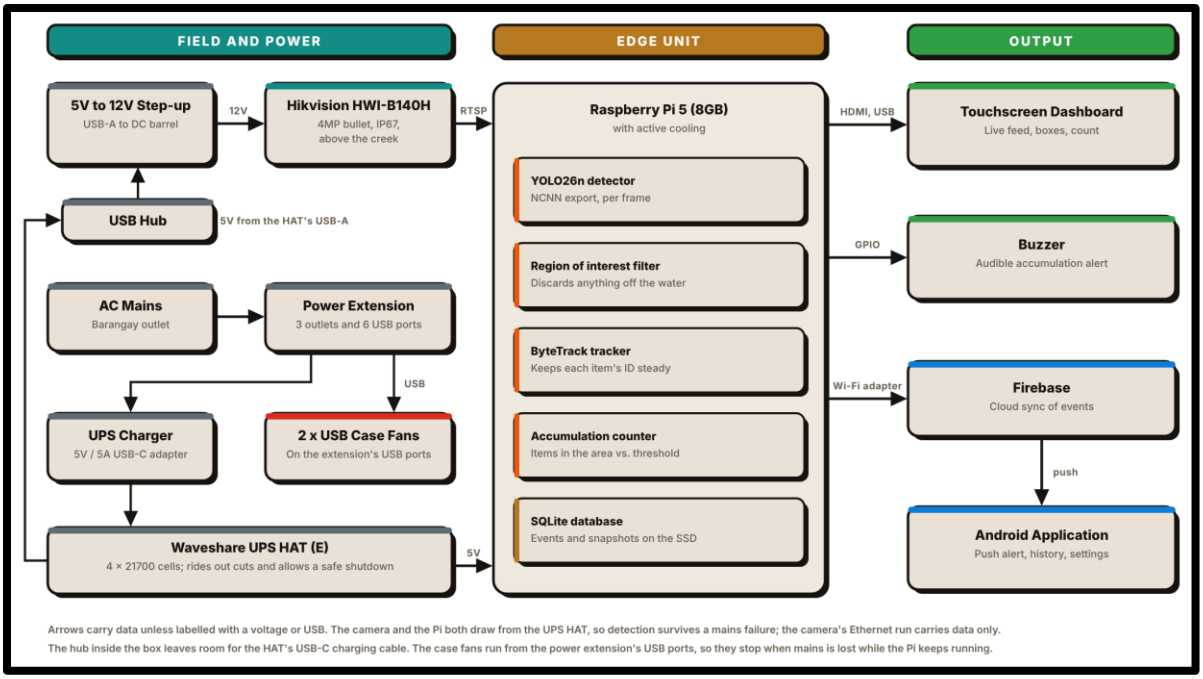

The project design emphasizes the key features, components, and project processes needed to support the goals of the study. It contains hardware and software integration, block diagrams, flow diagrams and sequential operations for the functionality of the system.

The proposed Garbage-Guard prototype detects floating garbage automatically while monitoring a creek. A high-definition CCTV camera supplies real-time video, and the YOLO26n object detection model classifies the floating objects as bottles, bags, or food containers. All processing runs on the Raspberry Pi 5 edge computer, as seen in Figure 26.

The prototype includes the following components:

1. **Input:** Live video footage of the creek surface recorded by a CCTV camera.

2. **Processing:** A YOLO26n model, exported to NCNN and run on a Raspberry Pi 5, with a region-of-interest filter and ByteTrack tracking, classifies and counts floating solid garbage.
3. **Storage:** Detection and accumulation records are stored in a SQLite database on the unit, with a snapshot for every event, and synchronized to Firebase.
4. **User Interface:** Real-time detections and accumulation alerts are shown on a touchscreen dashboard, sounded on a buzzer and pushed to an Android application.

As a real-time system, Garbage-Guard can give local authorities information for enforcing environmental regulations and help reduce severe pollution in local waterways. It reports garbage accumulation immediately, which helps communities stay aware of conditions in the creek and manage them. This early warning supports better water quality, lower environmental health risks, and closer adherence to garbage disposal regulations.

Figure 27

Front and Side Views of the Garbage-Guard Enclosure with Dimensions

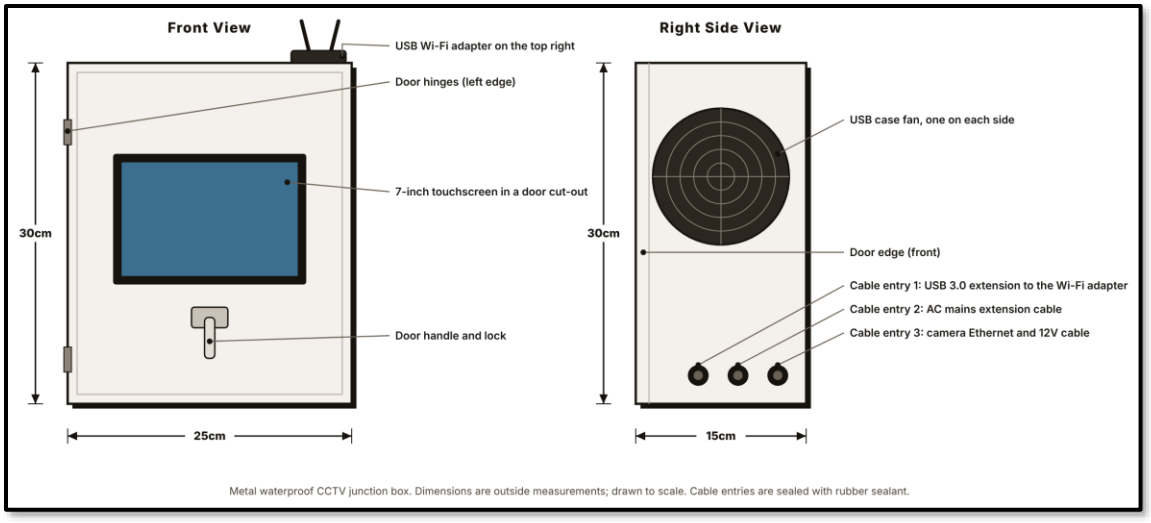


Figure 27 shows the physical design of the prototype: the outside dimensions of the enclosure after it was modified, in front and side view. The 7-inch touchscreen sits in a cut-out in the door, so the dashboard can be read and touched without opening the box, and the door handle with its lock is below the screen. The door is hinged on its left edge. A USB case fan is fitted on each side wall. Three cable entries are cut low on the right-side wall and sealed with rubber sealant. From front to back they carry the USB 3.0 extension cable to the Wi-Fi adapter, the AC mains extension cable, and the 2-in-1 Ethernet and power cable to the camera. The USB Wi-Fi adapter sits on top of the enclosure at the right, outside the metal walls. The camera is not drawn. It is mounted outside, apart from the box, and joined to it by its cable only.

3.2 Block Diagram

Figure 28

System Flow of the Waste Detection System

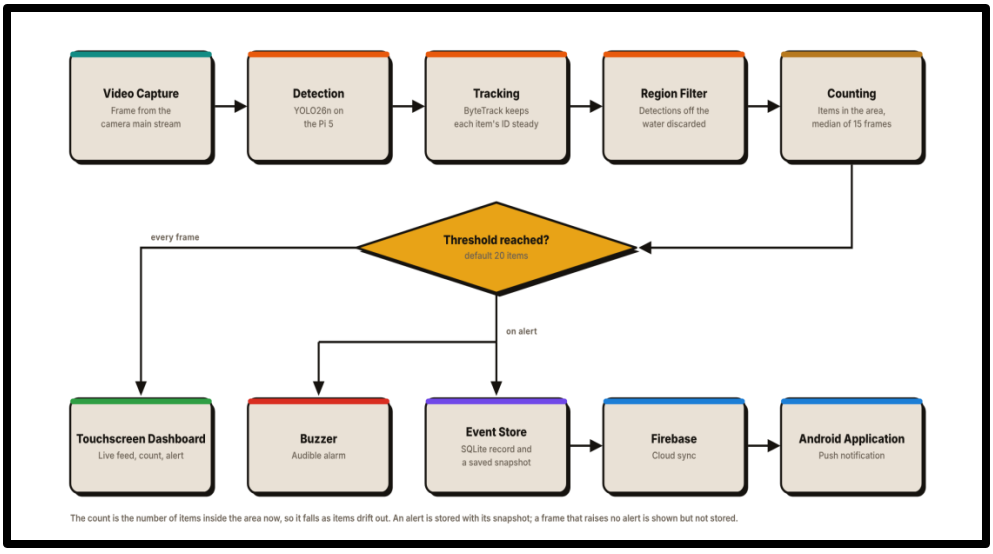


Figure 28 shows the block diagram of the system, which combines the YOLO26n model, an edge computing device (Raspberry Pi 5) and a CCTV camera for efficient real-time garbage detection and data storage.


Once initialized, the camera records real-time video of the target water surface. The video passes to the main processing unit, a Raspberry Pi 5, which uses the YOLO26n

model to classify floating solid waste, keep a consistent identity for each object, exclude objects outside the monitored water area, and count the rest. Users see the annotated results in real time on the live dashboard, along with accumulation alerts and stored data. The processing unit raises an alert when the count reaches the garbage threshold (20 by default). It also stores all garbage data in the local database, including category, time, and accumulation, for later analysis. Combining the hardware (Raspberry Pi 5 and camera) with the software (YOLO26n) lets local communities monitor and manage environmental hazards safely and efficiently.

3.3 Flowchart

Figure 29

Garbage-Guard's System Flowchart

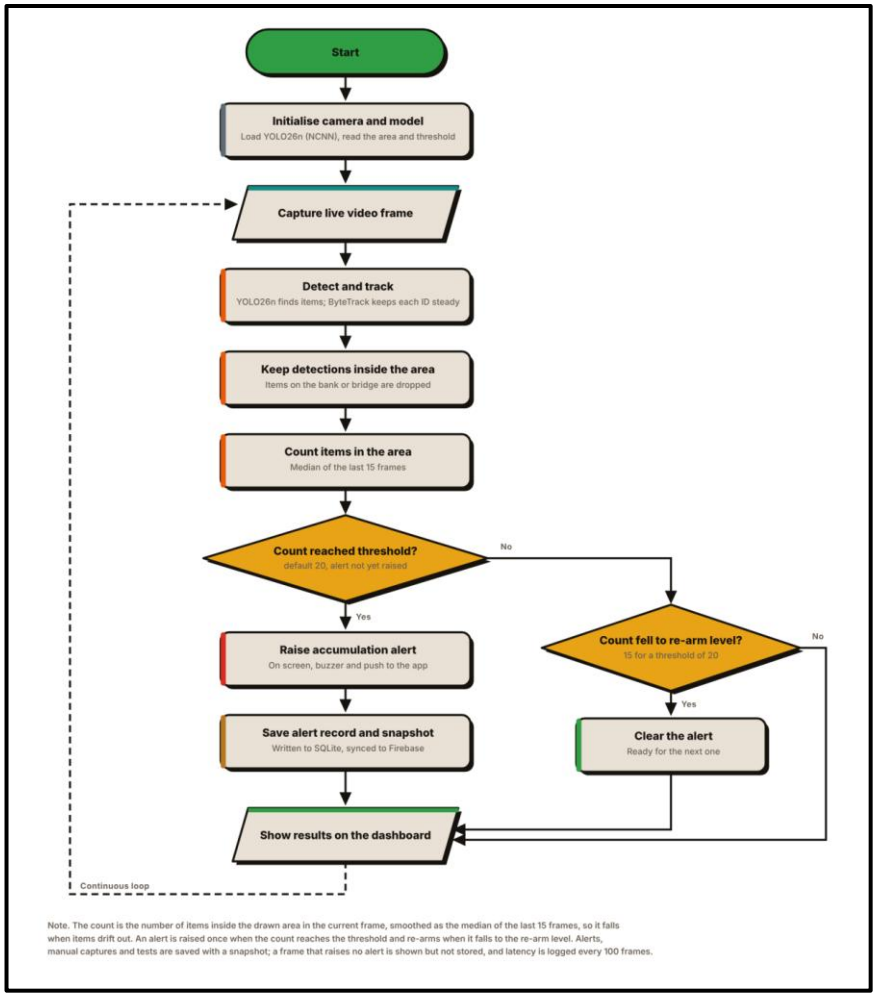

The garbage detection and data management process is shown in Figure 29. It begins by switching on and initializing the camera and loading the model, the saved monitored area and the threshold. The system then captures a live video frame, detects floating garbage with YOLO26n and passes the detections to ByteTrack, which keeps a single identity for each piece of garbage so that its box and label stay constant from frame to frame.

Detections outside the region of interest are discarded, so objects on the bank or a bridge are not counted. The items left in the area are tallied, and the tally is smoothed as the median of the previous 15 frames. The count therefore reflects the current amount of garbage in the area: it rises as items accumulate and falls as they drift away.

In the first decision point the smoothed count is compared with the accumulation threshold, which has a default value of 20 items but can be configured in the dashboard. When the count reaches the threshold and no Accumulation Alert is active, the system alerts the user on the touchscreen, activates the buzzer and sends a push notification to the Android app. The alert is written to the SQLite database with its counts, the totals for each class and an annotated snapshot, and synchronized to the cloud.

The second decision point checks whether an active alert can be cleared. Once the count drops to the re-arm level (15 for a threshold of 20), the alert is removed and the system is ready to trigger the next alert. This difference between the two levels prevents a hovering pile from generating a new alert every few seconds.

In each case the annotated frame and the count are shown on the dashboard, and the procedure repeats for the next frame. Frames that fire no alert are displayed but not stored. Besides alerts, the system stores manual captures, test alerts, and mutes, along with a latency summary every 100 frames. It keeps analyzing new video while the record stays small enough for a long deployment.

3.4 Component Materials

This section describes the parts that make up one Garbage-Guard unit, divided into the physical components and the software that runs on them. Each entry states what the component is and what it does in this system, since several were chosen for reasons that are not obvious from the part name alone.

Hardware Components

Raspberry Pi 5 (8GB)

Figure 30

Raspberry Pi 5 Single-Board Computer



Note. Image from The Pi Hut (n.d.-b).

The Raspberry Pi 5 is a single-board computer based around a quad-core Arm Cortex-A76 processor clocked at 2.4GHz with 8GB of memory. It has a 40-pin general-purpose input/output header, micro-HDMI outputs, USB 3.0 ports, Gigabit Ethernet and a PCIe interface.

It is the whole of the processing side of Garbage-Guard. It reads the camera's RTSP stream, runs the detection model, applies the ROI, maintains the tracker and the accumulation counter, writes to the local database, drives the buzzer (GPIO12), serves the dashboard over HTTP and pushes events to the cloud. The 8GB version was selected because the model, the tracker and the video decoder run at the same time with their working buffers in memory.

Hikvision HiWatch HWI-B140H Network Camera

Figure 31

Hikvision HiWatch HWI-B140H Bullet Network Camera



Note. Image from Multi-Line (n.d.).

The HWI-B140H is a 4MP fixed bullet network camera with a 1/3-inch progressive scan CMOS sensor, which supports up to 2560 x 1440 at 20fps. It has a fixed-focus M12 lens at F2.0, an 850nm infrared illuminator with a maximum off-axis range of approximately 30m, and an 8-stop (120dB) wide dynamic range, and is rated as IP67 with an operating temperature range between -30°C to 50°C. It accepts either power over Ethernet or 12V direct current on a 5.5mm coaxial plug, drawing at most 5W on the direct current input (Multi-Line, n.d.).

It is mounted above the creek, pointed along the water surface, and it is the only sensor in the system. Everything Garbage-Guard provides comes from this one feed, so its IP67 rating and wide temperature range matter for an outdoor deployment. Because the region of interest is traced over the camera's actual view, the camera is mounted first and the region is drawn second, never the other way around.

The camera operates from a 12V input power source and not through power over Ethernet (PoE); its Ethernet cable carries data only. Garbage-Guard reads the camera's main stream, set to 1280 x 720 at 15 frames per second in H.264, and crops each frame to the monitored area before it reaches the model, which runs at a detection size of 960 pixels by default, the size at which v8, v9 and v10 were trained. The Model card in the Settings tab installs and switches between trained models without editing code. v10 is the model reported in Chapter IV, and v8 is kept on the unit as the fallback. Each model

works best at the size it was trained at, so the detection size is the first setting to check after a switch; v7, for example, was trained at 640 pixels and scored higher on the frozen test set at 640 than at 960. Cropping keeps the detail of the main stream inside the area that matters, so a floating item covers more pixels than it did on the 640 x 360 sub-stream that earlier builds used. At 1920 x 1080 the Pi could not decode the stream fast enough and the picture fell six to seven seconds behind; at 1280 x 720 it runs about one second behind on the touchscreen. The sub-stream remains available from the Settings tab as a fallback.

Waveshare UPS HAT (E)

Figure 32

Waveshare UPS HAT (E) with Four Battery Bays



Note. Waveshare (n.d.-b). Image from Waveshare.

The Waveshare UPS HAT (E) is a four-cell 21700 lithium-ion uninterruptible power supply (UPS) board. It is mounted under the Raspberry Pi rather than on top of it, connecting through high-current pogo pins pressed against the underside of the board, and it provides 5V at up to 6A. It passes mains power through while charging, takes over when mains power fails and reports its state over I2C, including the individual cell voltages, the four currents, the power and the charger input. It also has a USB-A output.

One point about the pogo-pin connection is worth noting: it leaves the 40-pin header of the Pi completely free (Waveshare, n.d.-b), so the buzzer connects directly to the header pins it needs, without a pass-through header or a ribbon extension.

In Garbage-Guard, the HAT is what makes an unattended deployment safe. The program reads it over I2C and, when the battery is low, starts a 5-minute countdown to a clean shutdown, with a minimum of 5% charge and an optional grace period after boot, so the Pi is never cut off mid-write.

5V to 12V USB-A to DC Barrel Step-up Cable

Figure 33

5V to 12V USB-A to DC Barrel Step-up Cable



Note. Image from Shopee (n.d.).

A step-up (boost) converter raises a voltage from a lower to a higher level. This part is the cable version of such a converter, with a USB-A plug at one end and a 5.5mm barrel plug at the other. It is rated 12V at 0.8A. The step-up cable is not plugged into the UPS HAT directly. Its USB-A plug cannot fit beside the HAT's USB-C charging cable, so a small USB hub inside the enclosure is plugged into the HAT's USB-A output, and the step-up cable runs from the hub.

The camera needs no separate power supply. It draws from the battery-backed USB-A output of the UPS HAT through the hub, so an AC mains failure does not blind the system: the camera and the Pi stay up or go down together. The cable rating is also adequate, since the camera draws no more than 0.42A at 12V, just over half of the cable's 0.8A rating at 12V.

That margin matters because a converter run near its limit is a common cause of intermittent faults in field equipment, and an intermittent camera would present as a detection problem rather than a power one.

USB Wi-Fi Adapter and USB 3.0 Extension Cable

Figure 34

Erlvsoiis WF-ER1800M Dual-Band USB Wi-Fi Adapter



Note. Image from Shopee (n.d.).

Figure 35

Vention USB 3.0 Type A Male-to-Female Extension Cable



Note. Image from Shopee (n.d.).

The Raspberry Pi 5's own Ethernet port is given over to the camera on a direct link, so the unit reaches the internet over Wi-Fi. The Erlvsoiis WF-ER1800M (Figure 34) is a dual-band USB 3.0 adapter for the 2.4GHz and 5.8GHz bands with two external antennas (Shopee, n.d.), and Raspberry Pi OS recognized it with no driver installed. It is plugged into a Vention USB 3.0 Type A male-to-female extension cable (Figure 35) that leaves the box through a cable entry, so the adapter sits on top of the enclosure at the right, as Figure 50 in Chapter IV shows.

During testing, the built-in wireless adapter of the Pi could not complete a connection to any network, an open one included, and the metal walls of the enclosure weaken any radio inside it. The USB adapter replaced an earlier setup of a Wi-Fi repeater cabled through a USB-to-Ethernet adapter. The camera link and the internet link still run on separate interfaces, so a fault on one does not affect the other.

7-inch IPS Touchscreen

Figure 36

7-inch IPS HDMI Touchscreen



Note. Image from Shopee (n.d.).


The display is a 7-inch IPS panel at 1024 x 600. It takes video on HDMI and reports touch over USB-A. The panel type matters because the mounted screen is often viewed at an angle as well as straight on, and an IPS panel keeps its color and contrast off-axis where a cheaper panel would not.

It is the operator's only local interface. The dashboard runs full screen on it, and the region of interest is tapped directly on the video. A setting turns the HDMI output off after a set time, and sooner on battery, and the touch input is read directly so that a tap wakes the screen when the output is off.

Raspberry Pi Active Cooler

Figure 37

Raspberry Pi Active Cooler Fitted to a Raspberry Pi 5

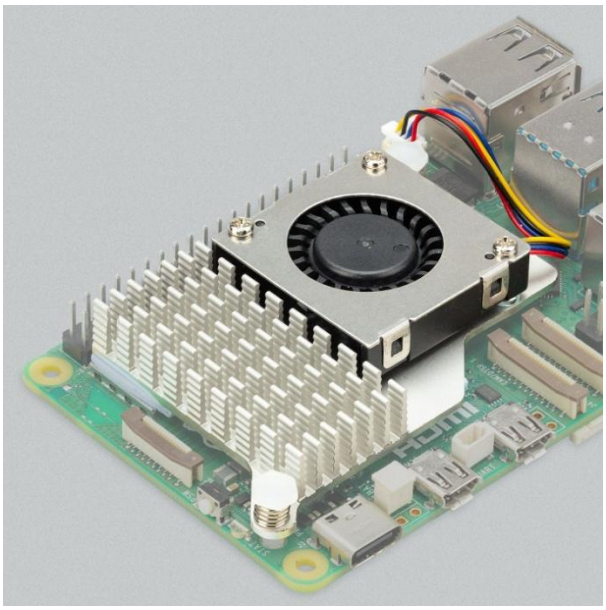

Note. Image from The Pi Hut (n.d.-a).

The Raspberry Pi Active Cooler is a heatsink and fan combination that attaches to the Pi 5's mounting points and runs from the board's dedicated fan header, which lets the firmware adjust the fan speed to the CPU temperature.

It is fitted because of sustained inference. Running detection on every frame keeps the processor near its thermal limit for long periods, and a Pi 5 that reaches the limit slows down, which shows up as rising latency or a falling frame rate rather than as an obvious fault. Active cooling keeps the measured latency a reflection of the hardware rather than of its temperature.

SanDisk 64GB High Endurance microSD Card

Figure 38

SanDisk High Endurance 64GB microSD Card



Note. Image from JB Hi-Fi (n.d.).

This SanDisk card belongs to the High Endurance line, which is designed not for the occasional large transfer a standard card is rated for but for devices that write continuously, such as a dashboard camera or a surveillance recorder.

The card holds only Raspberry Pi OS; the detection data is stored on the solid-state drive described below. Its workload is the operating system's own: journal writes, logs and the housekeeping of a machine that is never switched off. That workload is lighter but still continuous and lasts a whole field deployment, so an endurance-rated card makes sense in a system left running unattended.

KingSpec 256GB M.2 Solid-State Drive with Waveshare PCIe Adapter

Figure 39

KingSpec M.2 2242 NVMe Solid-State Drive



Note. Image from KingSpec (n.d.).

Figure 40

Waveshare PCIe to 2-Channel M.2 Adapter



Note. Image from Waveshare (n.d.-a).

The solid-state drive is a KingSpec 256GB module in the 2242 form factor, mounted on a Waveshare PCIe to two-channel M.2 adapter that plugs into the PCIe interface of the Raspberry Pi 5. Because the adapter has two channels, a second module can be added beside the first to extend storage for a longer deployment without changing the board or the mounting.

The drive holds the project folder, including the exported model, the database, and the snapshot store, while the operating system stays on the microSD card. The point of the arrangement is separation. Garbage-Guard writes a snapshot for every recorded event and keeps appending to the database, a steady stream of small writes that is the worst case for flash wear. Placing these on the drive puts the heavy writing on the storage best suited to absorb it, and if the drive fails, the operating system survives.

Passive Buzzer Module

Figure 41

MH-FMD Passive Buzzer Module



Note. Image from Shopee (n.d.).

A passive buzzer produces no tone unless the controller drives it with a varying signal. That is a drawback on paper but an advantage in practice, because the pitch is then under software control and one device can produce several distinct sounds.

It is wired with the supply to physical pin 17 (3.3V), with the signal line to physical pin 32 (GPIO12), and with the ground to physical pin 34. Each event has its own sound with the buzzer module, and when the count reaches the accumulation threshold, a repeated alarm is raised.

It drives the pin by software pulse-width modulation (PWM) by default and switches to hardware modulation, which is louder and steadier, when the pin has been configured for it. Quiet hours and a mute panel on the dashboard silence it when the operator sets them.

Metal Waterproof Junction Box

Figure 42

Metal Waterproof Junction Box Used for the Enclosure, Before Modification



Note. Image from Shopee (n.d.).

Figure 42 shows the junction box as it was bought, before it was cut for the touchscreen, the fans and the cable entries. It is a metal box with a hinged door, a rubber seal around the door, a grounding post and a handle lock. The seller lists it as IP65. That rating applies to the unmodified box only: once the cut-outs for the screen, the fans and the cables were made, the enclosure no longer meets it, which is why the unit is kept under cover.

The electronics are housed in a metal waterproof junction box of the type sold for closed-circuit television installations, measuring 25cm x 30cm x 15cm, with three openings cut low on the right side for the USB 3.0 extension cable to the Wi-Fi adapter, the AC mains extension cable and the camera cable, sealed with a rubberized water sealant. The USB Wi-Fi adapter is mounted on top of the box at the right. A USB fan is fitted on each side. The boards are stacked in a specific order: UPS HAT, Raspberry Pi (above the UPS HAT and running its active cooler), and PCIe with the SSD on top.

The enclosure is not exposed to the weather. It is installed under cover, and only the camera is mounted outside, with its cable running back to the box. The camera, the only part exposed to rain and sun, has an IP67 rating; the other components have no such rating and, by design, are kept out of the weather.

Power Extension with USB Ports

Figure 43

Mitsushi 2500W Power Extension with Three Universal Outlets and Six USB Ports



Note. Image from Shopee (n.d.).

Figure 43 shows the Mitsushi power extension, the point where AC mains power enters the enclosure. It is rated 2500W maximum at 10A, 220V and 50/60Hz, carries BPS certification, and has three universal outlets, six USB ports and a power switch (Shopee, n.d.). The UPS charger is plugged into one of its outlets and the two case fans into two of its USB ports, so the fans need no power adapter of their own.

This split matters during a power cut. The UPS HAT, the Active Cooler and the camera keep running from the battery when mains power fails, but the case fans stop,

because they draw from the extension and not from the HAT. On battery the processor keeps detecting inside a closed box with only its own cooler. This was deliberate: running the fans from the battery would shorten the time the unit can keep detecting.

5V USB Case Fans

Figure 44

5V USB Case Fan



Note. Image from Shopee (n.d.).

Figure 44 shows the FUGONGDA FGD9025H9BL case fan, two of which cool the inside of the enclosure, one on each side wall (Figure 27). Each runs on 5V DC from a USB-A plug, so it needs no separate supply, and the seller lists it in the 12 x 12 size (Shopee, n.d.). Both are plugged into the USB ports of the power extension and move air through the box past the board stack, while the Active Cooler handles the processor itself. A wire grille covers each fan on the outside of the wall.

Software Components

Raspberry Pi OS and the Python Environment



The unit runs Raspberry Pi OS with the detection program in a virtual environment kept separate from the system packages. An installer registers the launcher so that switching the Pi on is enough to bring the system up: it checks the camera, raises the network profile if needed, activates the environment, opens the dashboard full screen and starts detection. If no network is in range, it shows a wireless setup screen first.

Roboflow



Roboflow is a web-based platform for building computer vision datasets. It provides an editor for labeling images, keeps each version of a dataset, and exports labeled images in the formats that training libraries read (Roboflow, n.d.).

In this study it served one purpose. The bounding boxes for the three garbage classes were drawn and checked in its editor, then exported in the YOLO format for training on the researchers' laptop. Nothing from Roboflow runs on the Raspberry Pi: it is part of how the model was made, not part of the deployed unit, and its place in development is described in Section 3.5.

YOLO26n Detection Model



The detector is a YOLO26n convolutional neural network, trained on the custom dataset and exported to NCNN, an inference framework built for mobile and embedded

processors. NCNN is used rather than the original weights because it is markedly faster on the Pi's Arm processor.

The model classifies three categories, in order: bottle, bag and food container. The reported model, v10, scores a precision of 0.846, a recall of 0.672 and a mAP@0.5 of 0.744 on the frozen test partition, and a precision of 0.689, a recall of 0.423 and a mAP@0.5 of 0.536 on the creek-only subset. Chapter IV reports these figures in detail.

ByteTrack Multi-Object Tracker

ByteTrack tracks objects from frame to frame, even when they are missed at some time steps, so each object keeps a consistent label for its whole appearance in the scene.

This keeps the live view readable and the count stable. Without it, each item's box would be drawn afresh in every frame and could switch between classes or disappear for a frame. The boxes on the dashboard carry a small number, starting at 1, and the number is released after the object has been missing for about thirty frames.

Region of Interest and Accumulation Counter



The region of interest (ROI) is a polygon that the operator draws on the video; it is saved on disk and reloaded at start-up. A detection whose position falls outside it is discarded before counting, which is why the bank and the bridge wall are not counted.

At the end of each frame the counter is updated with the number of items inside the region, smoothed as the median of the last 15 frames so that a single missed or false detection does not move it. When the smoothed count reaches the threshold (20 by default, adjustable in the Settings tab), one alert is raised, and it re-arms once the count

drops to 15. A pile hovering around the threshold therefore does not trigger repeated alerts. Because the model misses some items, a displayed count of twenty can stand for more items than that in the monitored area, so the threshold is calibrated on site against a hand count rather than assumed (Table 17).

SQLite Database



Accumulation alerts, brief alerts that reached the threshold but were not sustained, mutes, manual captures, and test alerts are stored in a local SQLite database. Each alert and capture has a snapshot with the boxes, monitored area, and count stamped onto the image. A processing latency summary is written every 100 frames. Frames that trigger no alert are shown on the dashboard but not stored, which keeps the database small over a long deployment.

As a result, nothing is lost when the network goes down, and the saved snapshots can be used later to verify any reading the system made.

HTML5, CSS, JS



The dashboard is a single HTML file that holds its HTML5 (Hypertext Markup Language 5) markup, Cascading Style Sheets (CSS) and JavaScript (JS). Python's built-in web server serves it over HTTP from the Pi, with no build step and no external dependencies. It has three tabs: Monitor, History and Settings.

Monitor displays the live feed with the bounding boxes, running count, frame rate and mute panel and is where the region of interest is drawn. History displays snapshots of

events that have been recorded and a filter bar. Settings contains the detection threshold, the alert preferences, the screen saver and the power options.


Firebase



Firebase carries events and the system state from the unit to the phone, and a set of access rules controls who can read and write them.

It is in place so that an operator does not have to be at the creek to know that the threshold has been reached. The Pi is the system of record and the cloud has a copy.

Android Studio




The Android app, built in Android Studio, is written in Kotlin, and its screens are built with Jetpack Compose rather than XML layouts. It receives push alerts, shows the detection history and changes detection settings remotely.

It is the second half of the alerting path. The buzzer and the on-screen warning serve whoever is present; the application serves whoever is not.

3.5 Project Development

Figure 45

V-Model and Scrum Hybrid Development Model

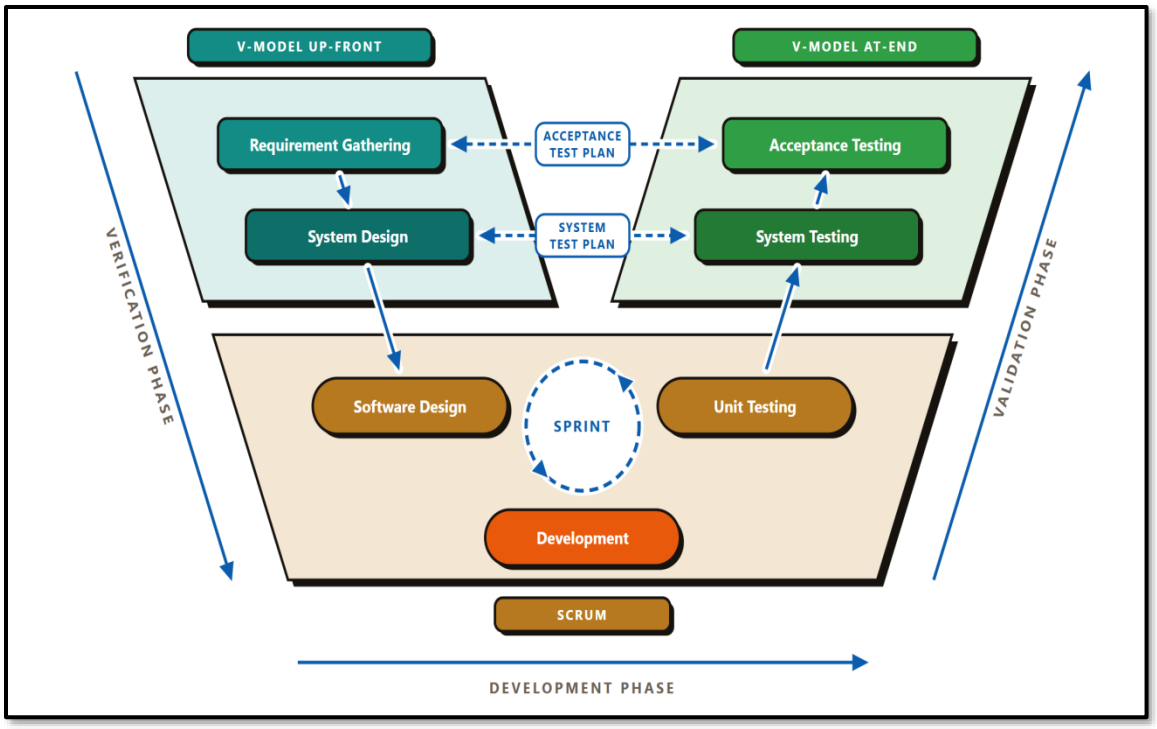

The researchers followed a hybrid of the V-Model and Scrum, shown in Figure 45. In this hybrid the V-Model is kept only at the two ends of the project, for requirements and planning at the start and for integration and system testing at the end, while the work in between is done in Scrum sprints with testing inside every iteration (Samolovac, 2026). A pure V-Model did not describe what happened in this study. It assumes each stage is finished before the next one starts, while the detection model here was trained, tested and retrained many times before the system as a whole was tested at the creek.

The upper left of the figure is the V-Model up-front. Requirement gathering fixed the scope, the three garbage classes and the ISO/IEC 25010:2023 targets with the adviser, and system design fixed the hardware: the camera, the Raspberry Pi 5, the power path and the enclosure. Both were settled early and once, because the parts had to be bought

and the tests depend on them. Each is paired with the stage directly across from it by a dashed test-plan link. The acceptance test plan, the indicators in Tables 6 to 8, was written during requirement gathering, and the system test plan, the cases in Table 5, was drafted as soon as the hardware layout was settled, long before there was a system to test.

The lower part of the figure is the development phase, run in Scrum, where most of the weeks on the Gantt chart in Appendix A were spent. The dashed circle is one sprint, and every sprint went around the same three steps. Software design chose what the sprint would change: a new dataset version, the counter logic, a dashboard tab or an application screen. Development built it, which for the model meant annotation in Roboflow, training on the researchers' laptop and export to NCNN. Unit testing closed the sprint with the cases in Table 4. Each new model was scored on the frozen test partition (TC_UNIT_01), and the counter and region logic were checked, before the build went onto the Raspberry Pi. A weak result did not move up to system testing. It became the reason for the next sprint.

The model went around this loop many times. It was trained ten times (v1 and v3 to v10, plus a v6b run; the v2 dataset was assembled but never trained), and each retraining was a sprint of its own. The test partition changed as the dataset was rebuilt between the early runs, so the scores of v5 and v6b cannot be compared with those of v7. With v7 its 807 images were frozen, and any later model is measured against the same set. The v8 model, trained with a relabeled set of creek photographs and 157 frames from the unit's own camera, went through the same cycle and was the model the unit ran during the October 31 session. v9 added more frames from the unit's camera, and v10, the final model, added pictures from a third data session at the creek. Both were measured against the same frozen set, and v10 was also tested on pictures from that session that it had not been trained on. Changes outside the model were sprints too. When the vibration motor was removed from the unit, the alert delivery case (TC_SYS_09) was repeated with the buzzer alone, and when detection moved from the camera's sub-stream to a crop of the

main stream, the detection and region cases were run again because every item now covered more pixels.

The upper right of the figure is the V-Model at-end. Once a build passed unit testing, the whole system was tested together, with the camera, the dashboard, the buzzer and the Android application (Table 5), and the cases that depend on detection, TC_SYS_01, TC_SYS_06 and TC_SYS_07, were repeated whenever a new model was loaded. Acceptance testing at the creek is the one stage meant to run a single time, on the final build. The three long arrows around the figure give the direction of the work: the verification phase runs down from the requirements into the sprints, the development phase runs across the sprints from software design to unit testing, and the validation phase runs up from unit testing to acceptance.

Roboflow, the platform used to label the dataset, belongs to the development step of the sprint and not to either end of the V. Annotation does not define a requirement and does not test one; it produces the material the model is built from. Its link to testing runs through the dataset. The frozen test partition used in unit testing is part of the same annotated set, so a weak score sends the next sprint back to annotation.

Figure 46

Model Training and Deployment Pipeline

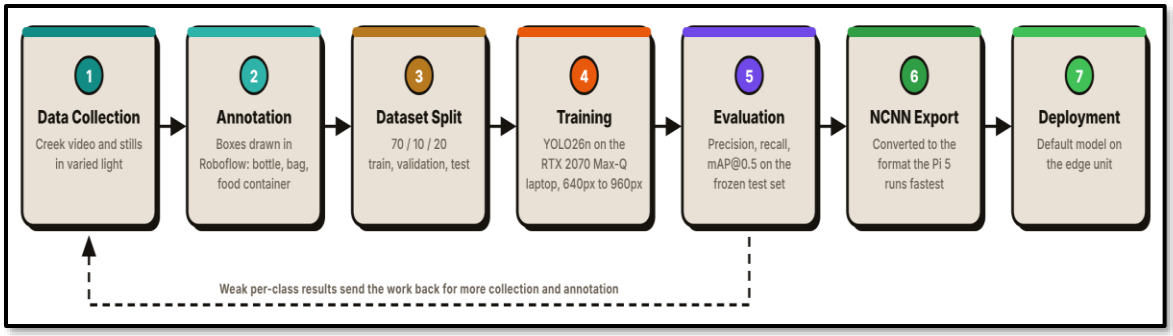


Figure 46 shows how the detection model itself was produced inside the development step of each sprint. The sequence runs from collection, through annotation in Roboflow, the dataset split, training on the researchers' laptop and evaluation on the

held-out partition, to export to NCNN and deployment on the Raspberry Pi. The dashed return path is not decorative. Weak per-class results sent the work back for further collection and annotation, and each pass around it was one sprint.

Phase 1: Verification (V-Model Up-Front)

This phase defines the requirements the system must meet and designs the hardware and software to meet them.

Requirement Gathering

The researchers consulted their thesis adviser, Dr. Jonel R. Macalisang, to set the scope and title of the Garbage-Guard project, and the requirements were defined during this stage. With the guidance of Prof. Ma Ian Delos Trinos, the professor of the Project Development subject, the acceptance criteria were based on the ISO/IEC 25010:2023 standard. The assessment covered three software quality characteristics:

- **Functional Suitability:** The accuracy of the garbage detection and of the accumulation count.
- **Performance Efficiency:** The speed of detection on the Raspberry Pi 5.
- **Usability:** How readable and usable the dashboard and alerts are for the people who will use them.

System Design

In this stage, the researchers planned the physical system architecture and the components needed for portability and continuous operation. The hardware layout uses these components:

- **Camera (Hikvision HiWatch HWI-B140H) -** The sensor for real-time computer vision capture.
- **Raspberry Pi 5 (8GB) with the official Active Cooler -** The core processor that executes the computer vision algorithm.

- **7-inch IPS touchscreen -** The display interface that shows the real-time video feed and the log history of detected garbage, and is used to draw the monitored area.
- **Storage -** A 64GB High Endurance microSD card holds the operating system, and a 256GB M.2 solid-state drive on a Waveshare PCIe adapter holds the model, the database and the snapshots.
- **Waveshare UPS HAT (E) with four 21700 cells -** Provides an uninterruptible power supply with a safe shutdown on power loss; its USB-A output also feeds the camera through a USB hub and a 5V to 12V step-up cable.
- **Power extension, UPS charger and two USB case fans** - AC mains power reaches the UPS charger through an outlet of the Mitsushi power extension and the case fans through its USB ports; the fans stop when AC mains are lost.
- **USB Wi-Fi adapter -** It joins the site's wireless network and carries the "cloud link" to Firebase.
- **Passive buzzer module -** Gives an audible accumulation alert from a GPIO pin.
- **Metal waterproof junction box -** Protects the electronics; its openings are sealed with water sealant, and only the camera is exposed to the elements.

Phase 2: Development Phase (Scrum)

The sprints are where the design turned into a working unit. Development began with a custom dataset of video frames and still images of floating garbage, labeled in Roboflow, and continued with training YOLO26n on a laptop fitted with an NVIDIA GeForce RTX 2070 Max-Q graphics card. Each model that passed unit testing was exported to NCNN and tried on the Raspberry Pi 5 for compatibility and speed. The tracker, the region filter, the counter, the dashboard and the Android application were

built around the model while it was still being retrained, which is why the same software was tested against several versions of the detector.

Software Design

Software design was revisited at the start of every sprint, and the design was organized in three layers:


- **AI / Computer Vision:** Real-time detection and counting using a YOLO26n convolutional neural network exported to NCNN, a region of interest filter and ByteTrack tracking.
- **Front-End (UI/UX):** The touchscreen dashboard on the unit, an Android application for remote alerts, history and settings.
- **Back-End (Database):** A local SQLite database that keeps the detections, counts and snapshots and syncs them with Firebase.

The architecture keeps detection, processing and visualization in separate modules.

Dataset Annotation and Model Training

Figure 47

Annotating a Food Container in the Roboflow Annotation Editor

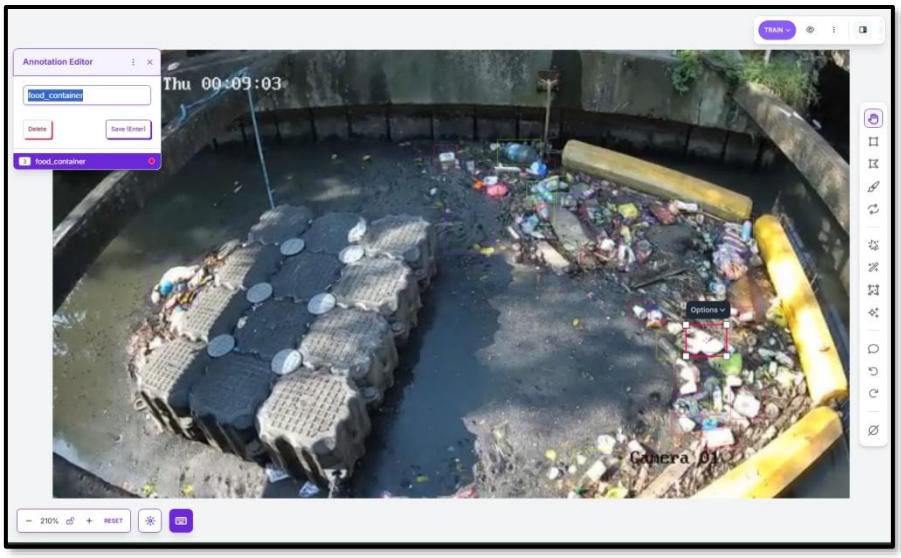


Note. Screenshot of the researchers' own Roboflow project, image 16 of 100 in a batch of creek frames captured on October 21, 2026.

Figure 47 shows the annotation editor of Roboflow (Roboflow, n.d.) open on one of the researchers' own creek frames. A box has just been drawn around a food container, and the editor asks for the class name before the box is saved. Every object in a frame is labelled this way: a tight bounding box, then a class. For this study the class list was limited to bottle, bag and food_container, in that order, so that the label numbers in the exported files match the class order the detector reports.

Figure 48

A Fully Annotated Creek Frame in the Garbage-Guard Dataset

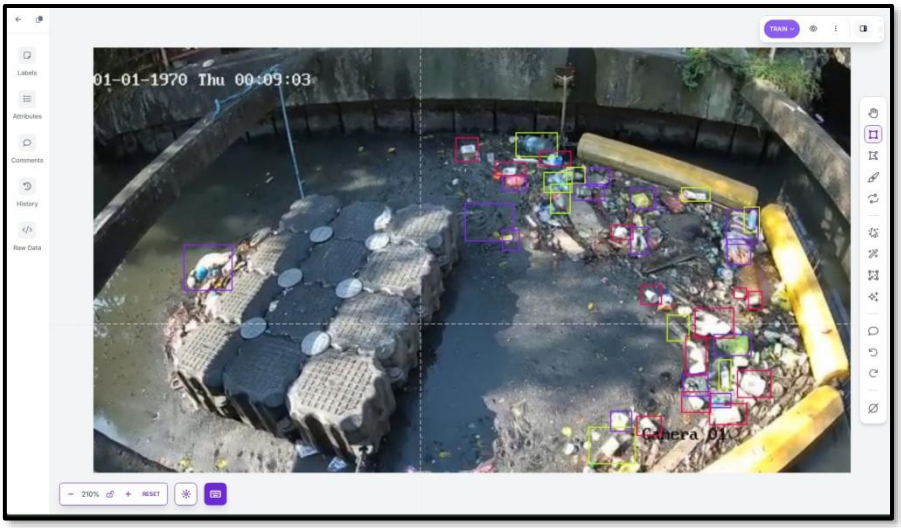

Note. Screenshot of the researchers' own Roboflow project. The box colors distinguish the three classes.

Figure 48 shows the same frame with all of its boxes. One frame from the creek can hold dozens of labelled items, many of them small, partly submerged or touching one another, and each one was boxed by hand. This density is why annotation took most of the time in each sprint, and why the creek photographs changed the model more than the public images did.

The labeled images were exported from Roboflow in the YOLO text format, one file per image with a line for each box, and divided into the 70/10/20 training, validation and test partitions. Training did not run on Roboflow's servers. It ran locally on the laptop's RTX 2070 Max-Q, where the v7 run stopped early at epoch 93 of a planned 100, at an image size of 640 pixels and a batch size of 16, after about 1.4 hours. A run of that length made it practical to retrain whenever the evaluation exposed a weak class, which is the sprint cycle in Figure 45 and the return path in Figure 46.

The prototype was made portable. The Raspberry Pi, the UPS, the storage and the step-up cable are all inside a metal waterproof junction box, with holes cut in the sides for the cables and sealed with water sealant, and a USB case fan on each side. The unit is kept under shelter, and only the camera is placed outside, mounted above the water and wired back to the unit.

Models v8, v9 and v10 were trained on the same laptop with the same settings as v7, except that the image size was raised from 640 to 960 pixels, the detection size used on the Raspberry Pi. The batch size was lowered from 16 to 8 for v8 to fit the graphics memory and set back to 16 for v9 and v10. The v8 dataset had 3,667 training and 391 validation images. It added 157 frames from the prototype's camera taken at the creek on October 21, 325 bag images from public datasets, and a relabeled set of creek photographs that replaced 750 older ones. Training stopped at epoch 136 and the best epoch was 106. The v9 dataset had 3,742 training and 393 validation images. It added 57 frames from the prototype's camera (1280 x 720, October 28) and a few more creek photographs to the v8 data, and it trained for 120 epochs in 3.2 hours. The v10 dataset added 27 labelled pictures from the third data session, held at the creek on November 4, 2026, to the v9 data. v10 was trained with the same settings as v9, stopped early at epoch 109 of 120, and its best epoch was 79, after about 2.9 hours. The Roboflow exports list the classes as bag, bottle, food container, so the label numbers were remapped to the order bottle, bag, food container and the result was checked.

The frozen test set of 807 images was kept the same for every version and was never trained on, so the scores of v7, v8, v9 and v10 can be compared. Two steps kept test images out of training. Images were matched to the frozen test list by their original file names, because Roboflow changes the file contents when it exports again and a check on file contents alone would miss them. Photographs taken within 60 seconds, or within two shots, of a test photograph were also removed from training (163 images for v8 and

v9). Each merge script stopped if the test count was not 807 or if any test image appeared in the training or validation set.

A second test set was made from 59 frames of the prototype's own camera at 1280 x 720, with 2,621 labelled items (640 bottles, 998 bags and 983 food containers). These frames were kept out of the training of v7 and v8. v9 and v10 were trained on them, so they are not used to score those two models.

A third test set came from the third data session at the creek on November 4, 2026, which produced 58 pictures: 31 frames saved by the prototype and 27 photographs taken with a phone. Pictures taken within 30 seconds of each other show almost the same scene, so they were grouped as one burst, and every burst was placed whole on either the training side or the test side. This gave 28 pictures for training and 30 for testing, with prototype frames and phone photographs on both sides. Images from earlier sessions taken within 60 seconds of a test picture were also removed from training. Of the 30 test pictures, 19 were labelled, with 361 boxes, and these 19 form the session 3 test set used in Chapter IV. Only v10 was trained on pictures from this session, and none of the 19 test pictures was used in training.

Assembly and Installation Procedure

The unit was assembled and installed in the order below. The order matters at two points: the camera has to be in its final position before the monitored area is drawn, and the threshold is set only after the dashboard count has been compared with a hand count at the site.

Assembly of the Unit

1. The Waveshare UPS HAT (E) is fixed under the Raspberry Pi 5 so that its pogo pins meet the power pads on the underside of the board, and the four 21700 cells are loaded. The Active Cooler is attached to the Pi.

2. The Waveshare PCIe adapter is connected to the Pi's PCIe connector by its ribbon cable and the KingSpec SSD is fitted to it. The microSD card holding Raspberry Pi OS goes into the Pi's card slot.
3. The buzzer module is wired to the 40-pin header: VCC to pin 17 (3.3V), IN to pin 32 (GPIO12) and GND to pin 34.
4. The board stack is fixed inside the junction box, and the touchscreen is mounted behind the cut-out in the door and connected to the Pi by micro-HDMI for video and USB for touch.
5. The two USB case fans are mounted on the side walls and plugged into the USB ports of the power extension, and the UPS charger into one of its outlets. The three cable entries on the right-side wall are sealed with rubber sealant once the cables are through.

Installation at the Creek

6. The enclosure is placed under cover at the site. Only the camera is installed outside.
7. The camera is mounted above the water and aimed along the creek surface. Its Ethernet cable runs to the Pi's Ethernet port, and its power plug to the 5V to 12V step-up cable, which is connected through the USB hub inside the box to the UPS HAT's USB-A output.
8. The USB Wi-Fi adapter is plugged into the Vention USB 3.0 extension cable, set on top of the enclosure at the right, and joined to the site’s wireless network or a phone hotspot from the Wi-Fi setup screen of the Pi.
9. The extension lead is plugged into the mains and the Pi powers up. The launcher checks the camera, opens the dashboard full screen and starts detection; if no network is in range, the Wi-Fi setup screen appears first.

10. With the camera in its final position, the operator presses Draw on the Monitor tab, taps points along the waterline and presses Apply. The monitored area is saved and reloaded after every restart.
11. The threshold is calibrated on site. Over several sessions the dashboard's item count is compared with a hand count of the items visible on the water at the same moment, with the time and lighting recorded, and the Accumulation Limit in the Settings tab is set so that the alert fires at the real count wanted. The default is 20 items, re-arming at 15.
12. A test alert is raised from the Settings tab to confirm that the dashboard, the buzzer and the Android application all respond before the unit is left running.

Testing Parameters and Scale of Measurement

Table 3

ISO/IEC 25010:2023-Based Metrics Descriptions and Scale of Measurements for Garbage-Guard

Objectives		Definitions	Metrics	Description	Scale
1.	Functional Suitability (Classification)	The ability of the YOLO26n model to correctly identify and classify solid garbage (bottles, bags, food containers).	Precision (%): the percentage of the detections made on the samples tested that are correct.	Excellent	95% - 100%
				Very Good	90% - 94.99%
				Good	80% - 89.99%
				Fair	70% - 79.99%
				Poor	Below 70%
2.	Functional Suitability (Accumulation Detection)	The system's ability to accurately track the item count and successfully trigger an "Accumulation Alert" once the threshold (default 20 items) is reached.	Percentage average (%) of successful alert triggers out of total simulated accumulation test cases.	Excellent	95% - 100%
				Very Good	90% - 94.99%
				Good	80% - 89.99%
				Fair	70% - 79.99%
				Poor	Below 70%
3.	Performance Efficiency	The inference time and processing latency of Raspberry Pi 5 to draw bounding boxes on the live camera feed on each floating garbage.	Average inference time (in seconds) during real-time monitoring.	Excellent	Below 0.5s
				Very Good	0.51s - 1.5s
				Good	1.51s - 3.0s
				Fair	3.1s - 5.0s
				Poor	Above 5.0s

Table 3 shows and defines the metrics that will be used to grade each objective of the Garbage-Guard system based on the ISO/IEC 25010:2023 software quality standards.

(1) The first metric, Functional Suitability (Classification), measures how accurately the YOLO26n computer vision model identifies and classifies floating solid garbage such as bottles, bags, and food containers. Precision and recall are computed on the frozen test set from the confusion matrix counts of True Positives (TP), False Positives (FP) and False Negatives (FN). True negatives are not used, because in object detection there is no countable set of empty water that the model correctly leaves unboxed. In the field, where no reference boxes are drawn, classification is checked by counting the labels on the dashboard that name the item correctly, and accuracy is the share of correct labels among all labels counted. The formulas are:

$$\textbf{Precision} = \frac{TP}{TP+FP} \tag{1}$$

$$\textbf{Recall} = \frac{TP}{TP+FN} \tag{2}$$

$$\textbf{Accuracy} = \frac{Correct\ Labels}{Total\ Labels\ Counted} \times 100 \tag{3}$$

(2) The second metric adds a layer of Functional Suitability regarding the system's Accumulation Detection capability. The system counts the items found, and when the threshold is reached (20 items by default), it raises an "Accumulation Alert" to warn the people responsible about the level of pollution in the creek. The metric is the success rate, the number of successful alert triggers divided by the total number of trials, as in the equation below:

$$\textbf{Success Rate} = \frac{Number\ of\ Successful\ Alerts}{Total\ Number\ of\ Trials} \times 100 \tag{4}$$

(3) Lastly, the third metric, Performance Efficiency, measures the real-time responsiveness of Raspberry Pi 5. This metric evaluates the inference time and processing latency of the Raspberry Pi 5 to successfully process a live camera feed request and draw bounding boxes on each floating garbage without severe hardware degradation. The system automatically records the latency time for each frame, defined as

the difference between the time the Raspberry Pi receives the frame (Start Time) and the frame detection completion time (End Time), so as to provide an objective evaluation. The last parameter is measured by applying the averaging method to determine the mean inference time (in seconds) over a fixed test time, as follows:

$$\textbf{Average Latency} = \frac{\sum (T_{End} - T_{Start})}{Total\ Frames} \quad (5)$$

Phase 3: Validation Phase (V-Model At-End)

This phase sets out the tests. Unit testing is described first because its cases are defined here, but in practice it closed every sprint of Phase 2. System testing and acceptance testing form the V-Model at-end and were run on the integrated unit.

Unit Testing

Unit testing is the last step of every sprint. It tests the software and hardware aspects of the system in a controlled environment. Depending on the scope and goal of the project, this includes isolating the YOLO26n model, the accumulation counter logic and the latency logging on the Raspberry Pi 5 to make sure they work correctly before the full integration. Its cases, listed in Table 4, were written during software design and were run again after every retraining of the model.

1. Classification Evaluation

To verify its software components, particularly the object detection algorithm, the frozen held-out test partition is used. The model is validated with the confusion matrix counts of True Positives (TP), False Positives (FP) and False Negatives (FN), using the measures defined in Equations 1 to 3:

- **Precision:** Measures the model's ability to avoid False Positives, that is, how many of the items the YOLO26n model identified as garbage were actually garbage (Equation 1).

- **Recall:** Measures the model's ability to detect all the actual garbage that is present, that is, how many of the garbage items in the water the YOLO26n model captured. In short, the model's ability to avoid False Negatives (Equation 2).
- **Accuracy:** The share of labels the system names correctly in the field, used for TC_ACC_01 (Equation 3). On the test set, mean average precision at an overlap threshold of 0.5 (mAP@0.5) is reported alongside precision and recall as the standard detection measure. The model must reach a precision of at least 80%.

2. Accumulation Detection Evaluation (Counter Logic)

To mathematically determine if the system correctly tracks item counts and triggers the "Accumulation Alert" at the 20-item threshold, simulated accumulation test cases are conducted.

Success Rate: Measures the percentage of successful alert triggers out of the total number of trials (Equation 4).

3. Performance Efficiency Evaluation

This measures the real-time responsiveness of the Raspberry Pi 5; the system automatically records the latency of each frame.

Average Latency: The mean inference time (in seconds) over a test period, used to confirm that there is no severe hardware degradation. It is the time from the moment the Raspberry Pi receives a frame (Start Time) to the moment detection and tracking finish (End Time), so camera encoding and network delay are not included (Equation 5).

Table 4

Unit Testing Cases for Controlled Environment Evaluation

Test Case ID	Objective	Procedure	Expected Result	Actual Result	Successful Trials / 10
TC_UNIT_01	Evaluate Classification Precision, Recall and mAP@0.5	Process the trained model on the frozen 20% of the annotated data (held-out test partition) and store the per class and overall results	The reported precision is at least 0.80 with recall and mAP@0.5 indicated for each of the three classes.		Not counted out of 10 (one evaluation run)
TC_UNIT_02	Validate Accumulation Counter Logic	Programmatically simulate the continuous detection of floating garbage items, incrementing up to the default threshold	The system triggers the automated "Accumulation Alert" once when the smoothed count reaches the 20-item threshold, and does not raise it again until the count has fallen to the re-arm level of 15.		
TC_UNIT_03	Verify the Performance Efficiency Logging	Run sample video frames through Raspberry Pi 5 to execute the latency tracking script.	The system is able to calculate the latency without hardware crashing, which is the difference between the start time and end time.		

System Testing

After unit testing, system testing is performed. This stage tests the entire system: the Raspberry Pi 5, the camera, the YOLO26n model, the region filter, the tracker, the database, the touchscreen dashboard, the Android application and the alerting logic. The prototype is installed at a local creek for environmental monitoring. Beyond the model itself, the tests check that the system receives real-time video, alerts only on floating items visible in the video (excluding items that are sunken or hidden by other items), counts the items in the monitored area, stores every alert, notifies the user of an alert and

keeps processing efficiently under continuous load. System testing is the partner of system design. Table 5 is its system test plan, drafted when the hardware layout was fixed, as the dashed system test plan link in Figure 45 shows, and run in full on each build that passed unit testing.

Table 5

System Testing Cases for Real-World Environmental Conditions

Test Case ID	Objective	Procedure	Expected Result	Actual Result	Successful Trials / 10
TC_SYS_01	Real-World Object Detection	Deploy the setup beside the waterways/creek and stream the live footage onto the Raspberry Pi 5 for real-time analysis	Bounding boxes are accurately drawn over visible floating bottles, bags, and food containers, ignoring sunken garbage or organic debris		
TC_SYS_02	Real-time Accumulation Alert	Allow the system to continuously monitor the creek until the valid target garbage items on the water surface reach the set threshold (20 items by default).	Successfully recognizes the threshold breach and triggers the automated accumulation alert in a live setting.		
TC_SYS_03	Real-time Processing Latency	Monitor the edge computing hardware's responsiveness while processing the live video feed for a standardized test duration.	The average inference latency per frame is logged automatically and remains stable without causing the system to crash or overheat.		
TC_SYS_04	System Flow (End to End)	Walk the flowchart in one run: switch the unit on, confirm the camera feed appears, place test items in the monitored water area, watch the count rise, cross the threshold, and observe the alert and the saved record.	Each step of Figure 29 happens in order: camera on, detection and tracking, counting inside the region, threshold alert, alert record saved, and the result shown on the dashboard and the application.		
TC_SYS_05	Live Dashboard	Open the dashboard on the touchscreen while detection runs.	The live feed with bounding boxes, class labels, the running count and the frame rate is shown and updates continuously.		
TC_SYS_06	Region of Interest	Draw the monitored area on the water, then place the same test item inside it and outside it.	The item inside the area is counted and the item outside it is ignored.		

Test Case ID	Objective	Procedure	Expected Result	Actual Result	Successful Trials / 10
TC_SYS_07	Stable Tracking and Count	Let one item drift into the monitored area and out of it again.	The item keeps a single identity number while in view, adds one to the count while it is inside the area, and drops off the count after it leaves.		
TC_SYS_08	Event Storage	Raise an accumulation alert, then take a manual capture, then open the History tab.	Both records appear with their time, counts and a saved snapshot, read back from the database.		
TC_SYS_09	Alert Delivery	Raise an accumulation alert while the Android application is connected.	The alert is displayed on the dashboard, the buzzer is activated, and a push notification goes to the application.		
TC_SYS_10	Threshold Setting	Change the accumulation threshold in the Settings tab, then repeat the count.	The new threshold takes effect and the alert is raised at the new value.		

Acceptance Testing

Acceptance testing is the partner of requirement gathering. Its acceptance test plan, made up of the test cases in Table 6, the developer-side indicators in Table 7 and the end-user survey in Table 8, was set with the adviser during that stage, as the dashed acceptance test plan link in Figure 45 shows. This phase demonstrates the working prototype live in the field to confirm that it meets the original aims of the study.

The prototype is operated at the creek on the deployment days covered by the permit in Appendix D (November 6, 7 and 9, 2026), after test sessions at the same site. The researchers maintain an uptime log of the number of days and hours the system ran without a crash or overheating, and the threshold calibration that took place on site. This log is the evidence for the Performance Efficiency indicators, and the end users answer the usability survey after using the system during the deployment.

To make the assessment accurate and set clear testing limits, this phase will be split into two perspectives: the developer side (Internal Acceptance) and the end-user side (External Acceptance).

Developer Side Acceptance Testing

The developer side evaluates only the technical performance, the stability of the hardware and the accuracy of the algorithms of Garbage-Guard. The evaluation is done by the researchers alone, based on the ISO/IEC 25010:2023 quality characteristics in the scope of the study. The researchers monitor the system during the live demonstration to see whether it reaches the target percentages and latency.

Table 6

Acceptance Testing Evaluation Test Cases

Test Case ID	Objective	Procedure	Expected Result	Actual Result	Successful Trials / 10
TC_ACC_01	Functional Suitability (Classification)	Conduct a live field demonstration to evaluate the percentage average of correct garbage recognition against total samples.	The system achieves a target of "Good" (80%) or better in successfully classifying the 3 target garbage types.		
TC_ACC_02	Functional Suitability (Accumulation Detection)	Conduct a live field demonstration to check the percentage of successful alert triggers.	System achieves a target of "Good" (80%) or better in successfully triggering alerts when the set threshold (20 items by default) is reached.		
TC_ACC_03	Performance Efficiency (Latency and Stability)	Review internal logs generated during the live demonstration to assess edge computing latency	Raspberry Pi 5 maintains a target average inference time of "Good" (1.51s - 3.0s) or faster (below 1.5s) without crashing.		Not counted out of 10 (computed from all logged frames)

The demonstration will involve watching the system in the field and determining whether the prototype achieves the desired percentage averages and latency. This phase has structured test cases as shown in Table 6.

To quantify the results of the live demonstration formally, the researchers rate the system against the internal evaluation checklist in Table 7.

Table 7

Developer-Side Internal Acceptance Indicators

ISO Characteristics	Indicator Code	Evaluation Statement
Functional Suitability (Target: Algorithm Accuracy)	DEV-FS1	The YOLO26n algorithm accurately detects the three target types of floating garbage (bottles, bags and food containers) while ignoring sunken debris and organic matter.
	DEV-FS2	In a live situation, the automated "Accumulation Alert" is activated when the set threshold (20 items by default) is reached with the system's counter logic ensuring it happens at the right time.
Performance Efficiency (Target: Hardware & Speed)	DEV-PE1	The video stream is processed by the Raspberry Pi 5 with an average inference latency below 3.0 seconds per frame.
	DEV-PE2	Edge computing hardware maintains uninterrupted operation without crashing or overheating.

End User Side Acceptance Testing

This boundary moves the focus from the software and hardware to the system's external interface and its usability. Target stakeholders from the local barangays will interact with the system's touchscreen monitor during the live field demonstration, and they make this evaluation.

To quantify the user acceptance, a survey based on the ISO/IEC 25010:2023 characteristics of Usability will be administered to the stakeholders immediately after the demonstration.

Table 8

End User Side Acceptance Survey Indicators

ISO Characteristics	Indicator Code	Evaluation Statement
Usability (Target: Interface and Operability)	USR-U1	Information displayed on the monitor is easy to read and understand.
	USR-U2	Visual bounding boxes on the camera feed clearly showed where the garbage is located on the creek.
	USR-U3	Accumulation Alert is clear, noticeable and effectively informs when the creek needs cleaning.
	USR-U4	The system provides helpful insights that would assist local authorities in monitoring creek pollution.
	USR-U5	The Android application shows the alerts and the history clearly, and what it shows matches the touchscreen.

Each statement in Table 8 is rated on the five-point Likert scale in Table 9. The responses to a statement are summarized as a weighted mean, the sum of each scale value multiplied by the number of respondents who chose it, divided by the total number of respondents, and the mean is read against the ranges below. The usability target is a weighted mean of at least 2.61 (Good) for every indicator, matching the Good target used for the other characteristics in Table 3.

Table 9

Five-Point Likert Scale and Interpretation of the Weighted Mean

Scale	Verbal Description	Weighted Mean Range	Interpretation
5	Strongly Agree	4.21 – 5.00	Excellent
4	Agree	3.41 – 4.20	Very Good
3	Neutral	2.61 – 3.40	Good
2	Disagree	1.81 – 2.60	Fair
1	Strongly Disagree	1.00 – 1.80	Poor

Weighted Mean = Σ (f × w) / N, where f is the number of respondents who chose a scale value, w is that scale value, and N is the total number of respondents.

IV. RESULTS AND DISCUSSION

This chapter presents the finished Garbage-Guard prototype and the results of the tests set out in Chapter III. Section 4.1 describes the prototype and where it was operated. Section 4.2 explains how it was built, following the path of one camera frame through the system. Section 4.3 reports the test case results for each specific objective. Section 4.4 reports the field deployment, Section 4.5 the developer-side and end-user evaluation, and Section 4.6 closes with the capabilities and limitations that the results support.

4.1 Project Description

Garbage-Guard is a fixed monitoring unit that watches the surface of a creek, detects floating bottles, bags and food containers, and counts how many of them are inside a monitored area drawn over the water. When the smoothed count reaches the set threshold, the unit raises an Accumulation Alert on its touchscreen dashboard, sounds its buzzer, saves a snapshot and a record, and notifies the Android application. The purpose is to tell barangay personnel when a stretch of creek needs clearing, before the waste builds up enough to block the flow.

The prototype was operated at a creek in Barangay 870, Pandacan, Manila, under the barangay testing permit in Appendix C. The testing permit covers October 21, 2026, 1:00 to 3:00 PM, and the deployment permit in Appendix D covers November 6, 7 and 9, 2026, 10:00 AM to 4:00 PM. The October 31 session was an independent test held with the verbal permission of a barangay kagawad. It was also used to collect pictures for the dataset at several spots along the creek, not only at the monitored one.

Figure 49


The Assembled Garbage-Guard Unit with the Hikvision HiWatch HWI-B140H Camera



Figure 49 shows the assembled unit from the front. The electronics are housed in a metal junction box with the 7-inch touchscreen set into the door and a locking handle below the screen. Stickers on the door carry the study title, the names of the researchers, the Garbage-Guard logo and a QR code that links to the project files. The Hikvision HiWatch HWI-B140H bullet camera is mounted separately on its own base and is joined to the box by its cable only.

Figure 50

Side View of the Enclosure Showing the Case Fan and the USB Wi-Fi Adapter

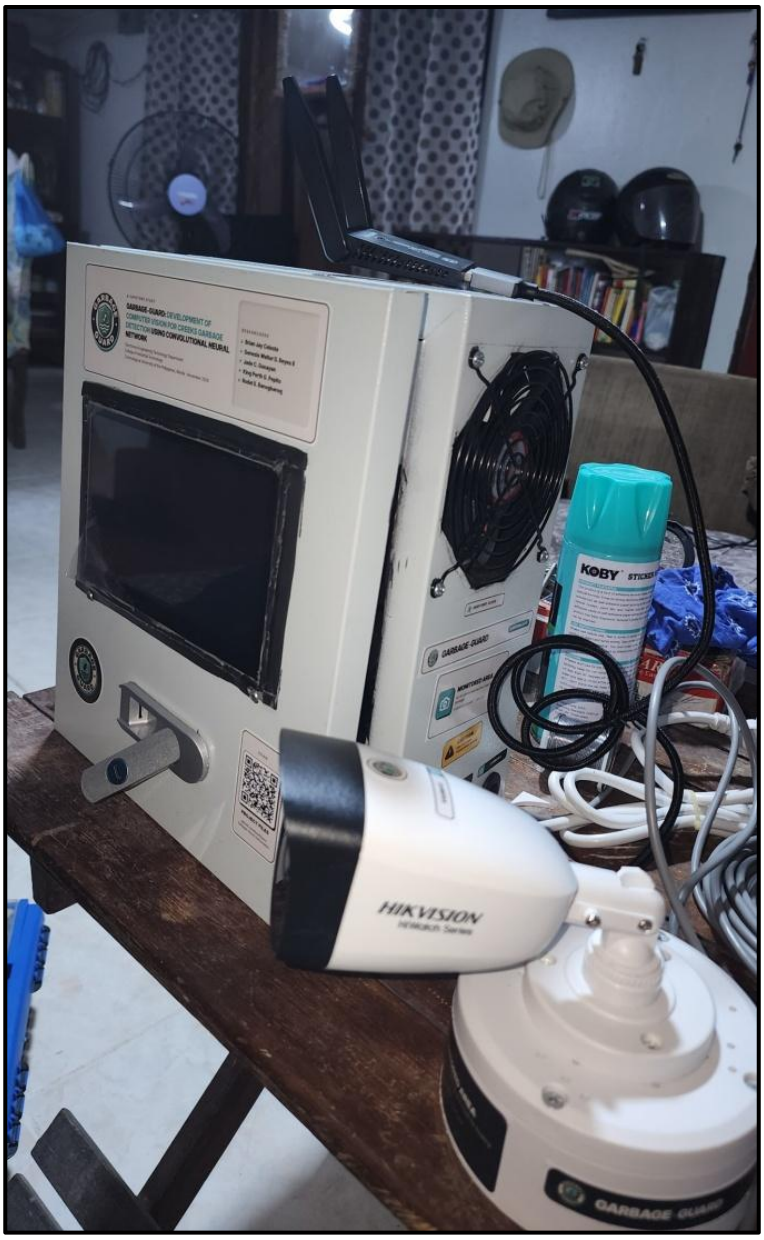


Note. The USB Wi-Fi adapter sits on top of the enclosure at the right, plugged into the Vention USB 3.0 extension cable that runs to the Raspberry Pi inside. The camera stands in the foreground on its base.

Figure 50 shows the right side of the enclosure with its case fan and the USB Wi-Fi adapter on top.

Figure 51

Inside of the Enclosure with the Main Parts Labelled

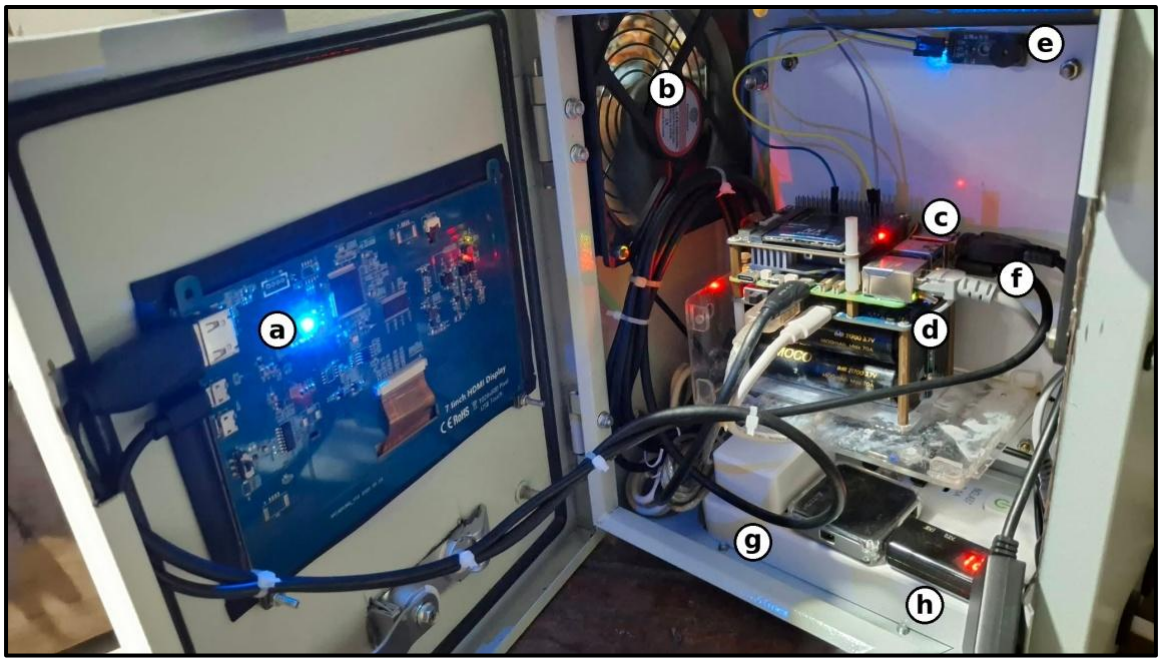


Note. (a) Back of the 7-inch 1024 x 600 HDMI touchscreen, mounted on the door; (b) USB fan; (c) board stack, from top to bottom: NVMe HAT, Raspberry Pi 5 with the Active Cooler, and Waveshare UPS HAT (E); (d) the four 21700 lithium-ion cells of the UPS HAT (E); (e) passive buzzer module; (f) 2-in-1 Ethernet and power cable to the camera; (g) official Raspberry Pi 27W (5.1V, 5A) power adapter, plugged into the AC mains extension; (h) 5V to 12V USB to DC barrel jack step-up cable for the camera, connected to a USB hub.

Figure 51 shows the inside of the enclosure with each part labelled.

During the session on October 31, 2026, the unit ran from 1:00 to 3:00 PM in sunny weather with normal daylight. Figure 52 shows the touchscreen during that session, with the monitored area drawn over the water and detections labelled by class, identity number and confidence.

Figure 52

The Touchscreen Dashboard During the Field Session at the Creek

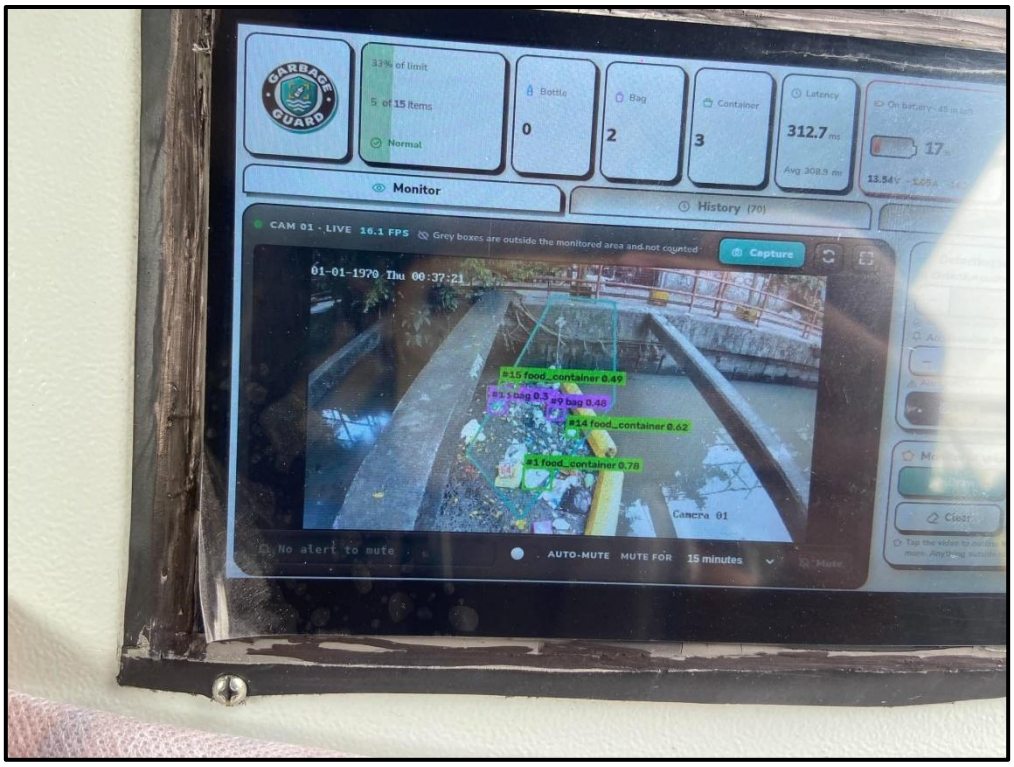

Note. The date stamped in the camera image reads 01-01-1970 because the camera clock was not set on site. The Raspberry Pi keeps its own clock, so the records in the database carry the correct time.

4.2 Project Structure

The structure is explained by following one camera frame from the moment it is captured to the moment its result appears on the phone. The parts are the camera, the Raspberry Pi 5, the detection stage, the accumulation and alert stage, the database, the touchscreen dashboard, the Firebase link and the Android application. The overall layout is the system architecture shown in Figure 26 of Chapter III.

Camera

The Hikvision HiWatch HWI-B140H sends its video over RTSP through an Ethernet cable connected directly to the Raspberry Pi 5. The camera is powered from the

UPS HAT through a USB hub, a 5V to 12V step-up cable and a 2-in-1 Ethernet and power cable, so the camera and the Raspberry Pi share one battery. The camera has two streams. The main stream, used for detection, was set to 1280 x 720 at 15 frames per second with H.264 encoding. The sub-stream, at 640 x 360, is kept as a fallback. The main stream at 1920 x 1080 was also tried, but the Raspberry Pi could not decode it fast enough and the picture fell six to seven seconds behind, so 1280 x 720 was chosen. At that setting the picture on the touchscreen was about one second behind the scene.

Raspberry Pi 5

The Raspberry Pi 5 runs Raspberry Pi OS (64-bit) and the Garbage-Guard program, written in Python with OpenCV. A separate reading thread keeps only the newest frame, so the detector never works on a backlog of old frames. If no frame arrives for 12 seconds the camera is reconnected, and if the main stream gives no picture twice in a row the program switches to the sub-stream on its own and shows a note on the dashboard. Internet access, needed for Firebase, comes through a USB Wi-Fi adapter mounted outside the enclosure, because the built-in Wi-Fi of the board could not join any network during testing.

Detection

Each frame is cropped to the box around the monitored area, with a small margin, before it reaches the model. Only that part of the picture is passed to YOLO26n, exported to NCNN for the Raspberry Pi, at a detection size of 960 pixels. Cropping keeps small items in the water large enough to detect and spends no processing time on the banks. ByteTrack gives each detected item an identity that stays the same while the item is in view, and the dashboard shows it as a short number next to the class name and the confidence.

Accumulation and alert

An item is counted when the center of its box lies inside the monitored area. To keep a single missed or extra detection from causing a false alarm, the count used for the

alert is the median of the last 15 frames. The Accumulation Alert is raised once when this smoothed count reaches the threshold. It is not raised again until the count has fallen back to the re-arm level, which is the threshold minus a quarter of it, rounded down (15 for the default threshold of 20, 12 for a threshold of 15), and at least 60 seconds have passed. A short spike that never lasts long enough to raise the alert is recorded as a suppressed event. The threshold is not fixed: it can be changed on the dashboard and in the application, so it can be calibrated to the size of each site. During the October 31 session it was set to 15 items. During the deployment it was tried at 15 and at 25 and ended at 20 (Table 17). When the alert is raised, the passive buzzer sounds and repeats until it is muted, except during the quiet hours set on the dashboard.

Database

Every alert, suppressed event, manual capture, test alert, mute and power event is written to a local SQLite database with its time, the count per class, the peak confidence, the threshold in use and the path of its snapshot. Each snapshot is saved with the boxes, the monitored area and an information card, and a clean copy without markings is saved beside it for labelling future training data. Every 100 frames the program also writes the mean, median and maximum latency to the database, which is the source of the latency results in Section 4.4.

Touchscreen dashboard

The dashboard is a local web page served by the Raspberry Pi on port 8080 and shown full screen on the 7-inch touchscreen. It has three tabs. Monitor shows the live picture with the detections, the count per class against the threshold, the latency, the battery level and the alert state, with buttons to capture a snapshot and to mute the alert. The monitored area is drawn here by tapping points around the water. History lists the stored events, each numbered and with a snapshot thumbnail, with filters by event type and date, and opens each snapshot. Settings holds the screen saver, power and automatic shutdown, buzzer and quiet hours, camera stream, box labels and the model upload.

Firebase

When a phone is not on the same network as the Raspberry Pi, the two communicate through a Firebase Realtime Database. The Raspberry Pi uploads its state, the history and compressed snapshots, and reads the commands the application leaves there, such as muting the alert. Uploads are kept small and slowed down when no phone is watching, so the free monthly allowance of Firebase is not exceeded.

Android application

The application connects to the Raspberry Pi directly on the local network, or through Firebase when it is away from it. It receives the Accumulation Alert as a notification with its own sound and vibration, shows the live picture, the history and the snapshots, and can mute the alert, change the detection settings and shut the Raspberry Pi down safely.

Figures 53 to 58 show the screens that satisfy each requirement. Figures 53 to 57 use the camera frame and counts of an accumulation alert recorded by the unit on November 4, 2026, in which 20 items were counted inside the monitored area. The complete set of screens is in Appendix H.

Figure 53

Monitor Tab of the Touchscreen Dashboard with Live Detections (TC_SYS_05)



Figure 54

Dashboard During an Accumulation Alert (TC_SYS_02, TC_SYS_09)



Figure 55

Drawing the Monitored Area on the Dashboard (TC_SYS_06)



Figure 56

History Tab with the Stored Alerts and Snapshots (TC_SYS_08)

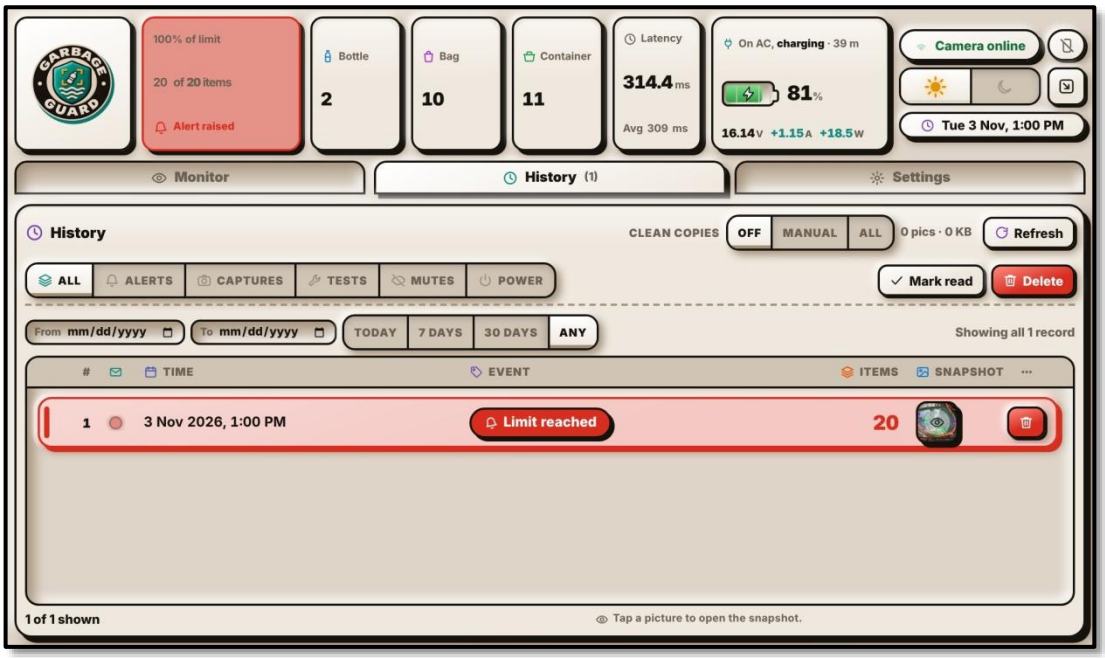


Figure 57

Settings Tab with the Threshold, Camera Stream and Model Options (TC_SYS_10)

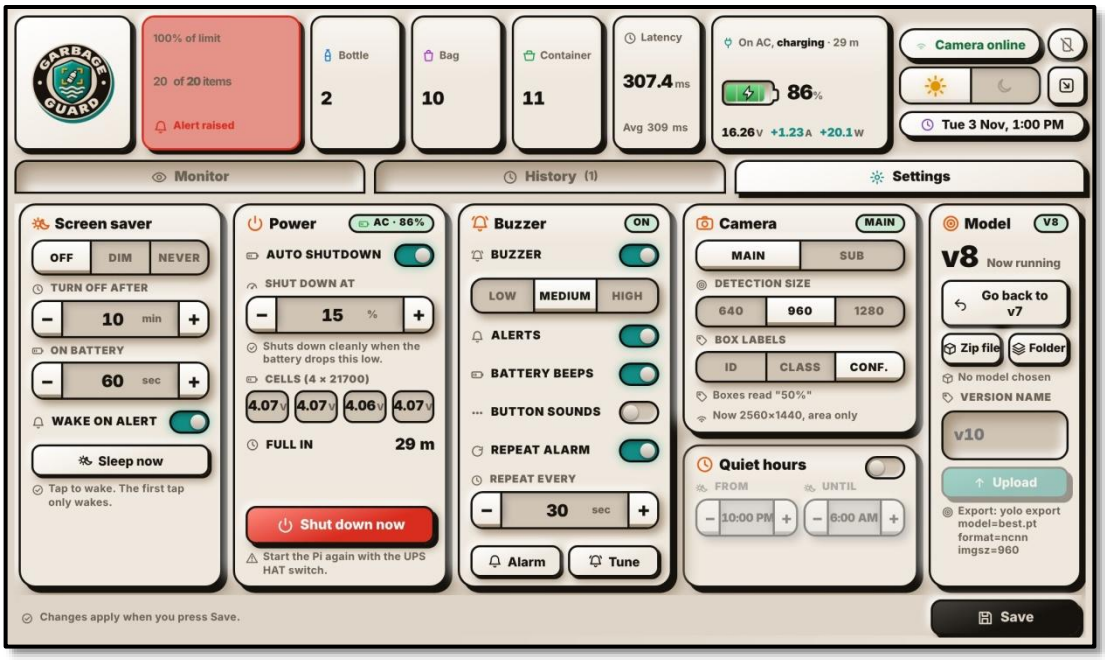


Figure 58

Accumulation Alert Notification on the Android Application (TC_SYS_09)



4.3 Test Case Results

The results are reported per specific objective, in the order of Section 1.2. Objectives 1 and 2 are covered in this section, and Objective 3, the evaluation under ISO/IEC 25010:2023, in Sections 4.4 and 4.5. The results also follow the development model in Figure 45: the training runs in Table 10 are the development sprints, each closed by the unit tests in Table 14, while Tables 15 to 20 report the system and acceptance tests of the V-Model at-end.

Objective 1: Detection Performance of the YOLO26n Model

Training history

Ten training runs were carried out: v1, v3, v4, v5, v6, v6b, v7, v8, v9 and v10. The dataset for v2 was assembled but not trained, because v3 replaced it. Table 10 lists every run with the change that defined it and its scores on its own test set.

Table 10

Training Runs of the YOLO26n Model and Their Test Results

Run	Main change from the previous run	Test images	Precision	Recall	mAP@0.5
v1	Three public datasets, first proper train, validation and test split	310	0.893	0.636	0.703
v2	Second bottle source added (assembled, not trained)	–	–	–	–
v3	More bottle variety and TACO food containers	357	0.828	0.655	0.708
v4	Class names generalized, more public data for all classes	377	–	–	0.687
v5	188 hand-labelled creek images added	641	0.863	0.685	0.761
v6	Creek images increased to 934, training moved to a local RTX 2070	397 of 509	0.831	0.729	0.783*
v6b	Styrofoam labels repaired and capped at 400 images	441	0.824	0.683	0.754
v7	Test partition frozen at 20% of the data	807	0.852	0.685	0.745
v8	Relabelled creek set, new bag images, field captures, trained at 960px	807	0.829	0.674	0.728
v9	57 more prototype camera frames (1280 x 720, October 28) and a few more creek photographs, trained at 960px	807	0.793	0.702	0.730
v10	27 photographs and prototype camera frames from the third data session added to the v9 data, trained at 960px	807	0.846	0.672	0.744

Note. The scores of v1 to v6b are not directly comparable with each other or with v7 and later, because each of those runs had a different test set. v7 to v10 use the same frozen test set of 807 images. v8, v9 and v10 are shown at their training size of 960 pixels. *The v6 score is not valid: its data loader silently skipped all 1,092 styrofoam images in every split.

The first run, v1, combined three public datasets into the three classes and gave a mAP@0.5 of 0.703, with bags almost perfectly detected and bottles the weakest class. v3 added bottles from more varied scenes and a small number of food containers from TACO. Bottle recall rose from 0.429 to 0.492, but the overall score barely moved (0.708), which showed that more public data was giving smaller and smaller returns.

v4 renamed the classes from plastic-specific labels to bottle, bag and food container and took every usable image from TACO. The overall score fell to 0.687, because paper and carrier bags from TACO made the bag class less consistent. Public data had stopped helping, which led the researchers to collect their own creek images.

v5 was the first run with real creek images: 188 photographs taken and labelled by the researchers. The overall score rose to 0.761, and the two classes that received creek images, bottles and food containers, were the two that improved. This confirmed that images matching the deployment site mattered more than the amount of public data.

v6 increased the creek images to 934 and scored 0.783, but only 397 of its 509 test images loaded. The investigation found that every styrofoam image had been dropped because its label files mixed box and polygon lines, so the v6 score was not valid. v6b repaired those labels and capped the styrofoam source at 400 images. It scored 0.754 on a complete test set, which was a lower but honest result.

The rebuild for v6b also showed that rebuilding the dataset moved some test images into training. For v7 the test partition was therefore fixed once at 20% of the data, as the adviser required, and never rebuilt. v7 scored a precision of 0.852, a recall of 0.685 and a mAP@0.5 of 0.745 on 807 test images. It served as the reference for every run after it.

v8 replaced the old creek images with a relabelled set, added new bag images and images captured by the prototype itself, and was trained at 960 pixels to match the detection size on the Raspberry Pi. On the same frozen test set it scored slightly below v7 (mAP@0.5 of 0.728 against 0.745) and clearly below it on the creek-only images (0.497 against 0.593), while bags at the creek stayed at about 0.17 for both models. The likely reason is that v8 had fewer images resembling the old creek test photographs, since many of them were left out to keep the test set separate. The frozen test set is made of older phone photographs and does not show the sharper 1280 x 720 picture the prototype now

uses, so the models were also compared on frames from the prototype's own camera (Table 13).

v9 added 57 frames from the prototype's camera and a few more creek photographs to the v8 data and was also trained at 960 pixels. On the frozen test set it scored a mAP@0.5 of 0.730 against 0.728 for v8, and on the creek-only photographs 0.530 against 0.497. Its precision on the frozen test set was 0.793, lower than the 0.829 of v8 and below the 80% target, while its recall was higher (0.702 against 0.674). A difference this small in mAP@0.5 is within what one training run can vary by, and the creek-only set holds only 46 bag boxes, so the researchers did not report v9 as better than v8. To settle the question on pictures that neither model had seen, the researchers held a third data session and kept half of it out of training as a test set.

The third data session took place at the creek in Barangay 870, Pandacan, on November 4, 2026 (Figure E9 in Appendix E). It produced 58 pictures: 31 frames saved by the prototype and 27 photographs taken with a phone. Pictures taken within 30 seconds of each other were treated as one burst, because they show almost the same scene, and every burst was placed whole on one side. This gave 28 pictures for training and 30 for testing, with frames from the prototype and phone photographs on both sides. Any older image taken within 60 seconds of a test picture was also kept out of training. Of these, 27 training pictures and 19 test pictures were labelled and used. The other 11 test pictures were not labelled, so the session 3 test set in this chapter holds 19 pictures with 361 boxes.

v10 is v9's data with the 27 labelled training pictures from the third session added. It was trained with the same settings as v9: 960 pixels, a batch of 16, up to 120 epochs and the same random seed. On the frozen test set it scored a precision of 0.846, a recall of 0.672 and a mAP@0.5 of 0.744. Its mAP@0.5 is close to v8 (0.728) and v9 (0.730), within what one training run can vary by. Its precision is clearly higher than v9's (0.846 against 0.793) and is back above the 80% target, while its recall is lower (0.672 against

0.702). In plain terms, v10 marks a few fewer items than v9, but it is right more often when it does.

On the test half of the third session, v10 reached a mAP@0.5 of 0.404 at 960 pixels, against 0.337 for v9, 0.204 for v8 and 0.149 for v7 (Table 13). Its precision there was 0.530 and its recall 0.367, against 0.330 and 0.266 for v8. This comparison favors v10 for a clear reason: v10 was trained on pictures from the same spot and the same day, and the other models were not. The test pictures themselves were never used in training, so the result shows how well v10 handles new moments at this creek, but it does not show how it would do at a different site. For a camera that stays fixed at one spot, this is the situation that matters. v10 is the reported model for the rest of this objective.

Results of the reported model

Table 11 gives the per-class results of v8, v9 and v10 on the frozen test set of 807 images and on its 180 creek images. The v7 results stay in Tables 10 and 12.

Table 11

Per-Class Detection Results on the Frozen Test Set and on the Creek Images

Test set	Class	v8 P	v8 R	v8 mAP@0.5	v9 P	v9 R	v9 mAP@0.5	v10 P	v10 R	v10 mAP@0.5
Full (807)	All classes	0.829	0.674	0.728	0.793	0.702	0.730	0.846	0.672	0.744
Full (807)	Bottles	0.772	0.556	0.629	0.745	0.617	0.643	0.828	0.571	0.664
Full (807)	Bags	0.854	0.803	0.816	0.789	0.807	0.804	0.831	0.787	0.818
Full (807)	Food containers	0.861	0.662	0.739	0.845	0.682	0.742	0.881	0.657	0.750
Creek (180)	All classes	0.567	0.499	0.497	0.613	0.508	0.530	0.689	0.423	0.536
Creek (180)	Bottles	0.601	0.505	0.509	0.671	0.547	0.563	0.834	0.450	0.590
Creek (180)	Bags	0.248	0.261	0.174	0.287	0.261	0.204	0.312	0.152	0.194
Creek (180)	Food containers	0.851	0.732	0.807	0.881	0.716	0.823	0.921	0.666	0.825

Note. P is precision and R is recall. All three models were scored at 960 pixels, the size they were trained at, with the same script on the same computer. The creek-only bag rows rest on 46 boxes.

Precision (Equation 1) is the measure read against the Table 3 scale, following the 80% target in Section 1.3, with recall and mAP@0.5 reported beside it. On the full test

set v10 reached a precision of 84.6%, which falls in the Good band (80% to 89.99%) and meets the 80% target. v8 also reached the Good band (82.9%), and v9 fell just short of it (79.3%, Fair). On the creek images alone the precision of v10 was 68.9%, in the Poor band (below 70%), although it was still the highest of the three models there (56.7% for v8 and 61.3% for v9). The difference between the two sets is expected, because the creek images are harder: items are smaller, partly submerged and mixed with leaves and other debris. Nunkhaw et al. (2025) reported the same kind of gap between controlled and field conditions for floating waste in urban canals.

Recall was lower than precision in every class. In plain terms, when the model marks an item it is usually right, but it misses some items altogether. Since missed items are not counted, the system is more likely to count too few items than too many, so an alert may come later than it would with a perfect detector, but rarely too early. Bags in the older creek photographs were the weakest result, with a recall of 0.152 on 46 boxes, lower than the 0.261 of v8 and v9. On the newer pictures of the third session, however, v10 found bags far more often (recall of 0.427, Table 13), so the weakness is strongest on the older photographs. Food containers were the strongest class, with a mAP@0.5 of 0.825 on the creek images.

The precision of 84.6% on the full test set is close to the 85.9% overall accuracy that Nežerka et al. (2023) reported for convolutional recognition of waste fragments, although the two measures differ and their task was classification of single fragments rather than detection in a moving scene.

Figures 59 to 61 show the training curves, the precision-recall curve and the normalized confusion matrix of the v10 model. The precision-recall curve and the confusion matrix were made on the validation set, not on the frozen test set.

Figure 59

Training and Validation Curves of the v10 Model

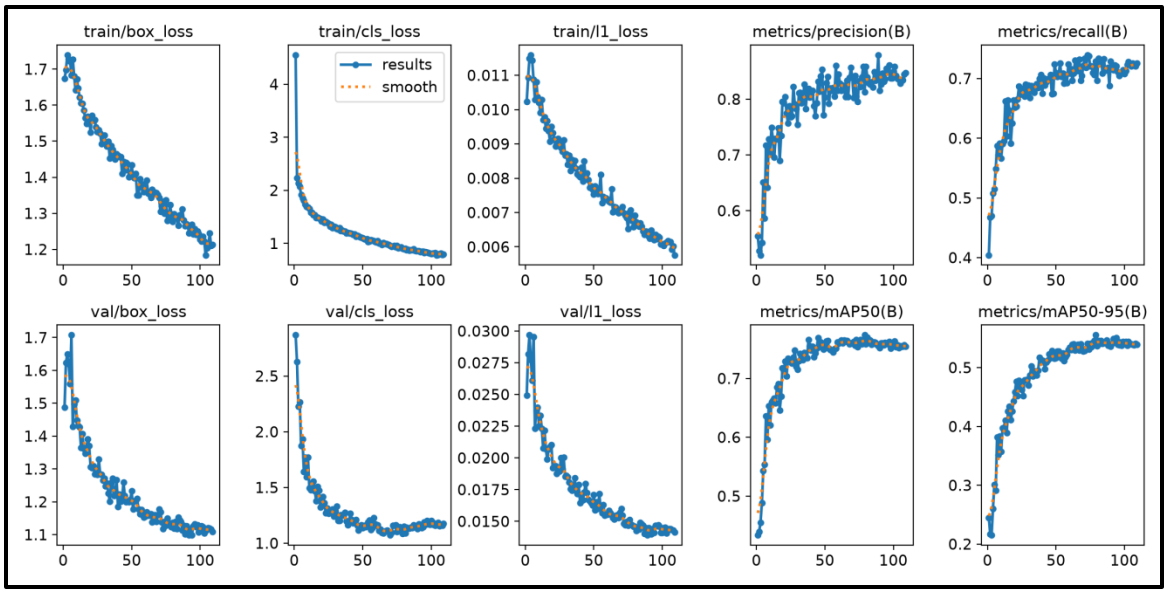


Figure 60

Precision-Recall Curve of the v10 Model on the Validation Set


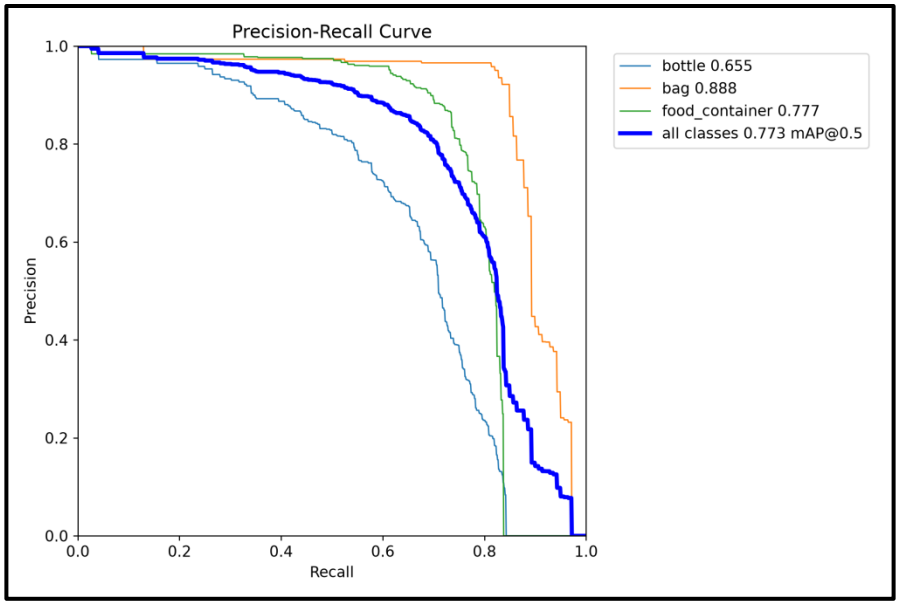


Figure 61

Normalized Confusion Matrix of the v10 Model on the Validation Set

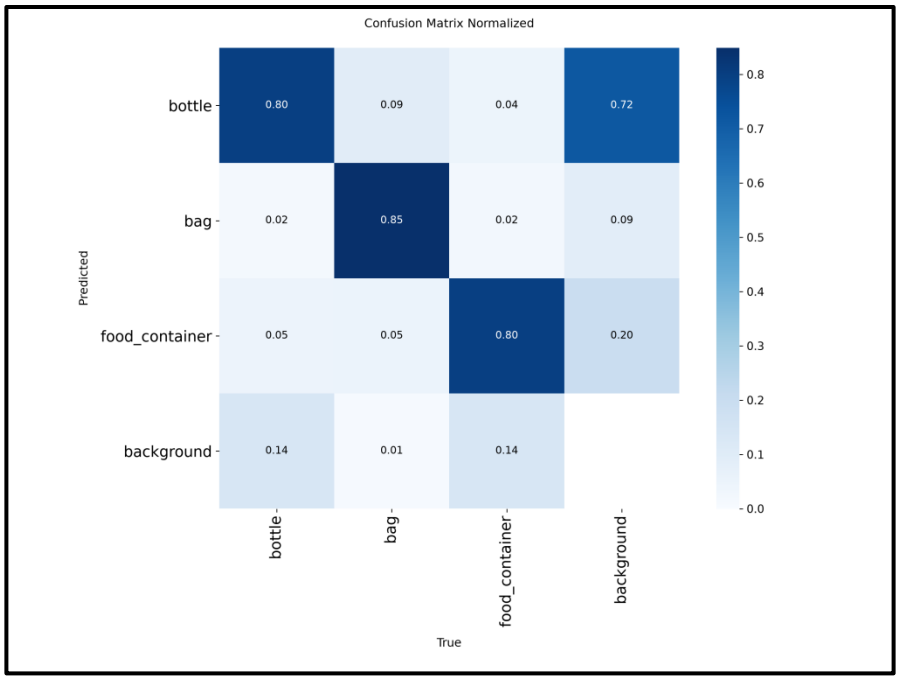

The training curves in Figure 59 show the training losses falling steadily throughout the run. The validation mAP@0.5 rose quickly over the first 40 epochs and levelled off at about 0.76 from epoch 50 onward. The validation classification loss stopped falling at about epoch 70 and then rose slightly, a sign that longer training would not have helped. Training stopped early at epoch 109 of 120, after 30 epochs without improvement. The best epoch was 79, and training took about 2.9 hours on the same laptop used for v7 and v8. On the validation set the best epoch reached a precision of 0.854, a recall of 0.698 and a mAP@0.5 of 0.773. These are higher than the frozen test scores in Table 11 because the validation images come from the same sources as the training images. v10 also has a different validation set from v8, so the validation scores of the two runs cannot be compared directly. The confusion matrix in Figure 61 shows that 85% of bags, 80% of bottles and 80% of food containers were classified correctly. Bottles and food containers were the classes most often missed, with 14% of each

predicted as background. Of the false detections on background, 72% were labelled as bottles and 20% as food containers, so a false alarm is most likely to appear as a bottle.

Table 12 compares v7 to v10 on the same frozen test set, measured on the same computer with the same script at both image sizes. Table 11 shows the models at their training size of 960 pixels, while Table 12 also shows them at 640 pixels, the size v7 was trained at.

Table 12

mAP@0.5 of v7 to v10 on the Frozen Test Set and the Creek-Only Photographs

Test set	Class	Image size	v7	v8	v9	v10
Full (807)	All classes	640px	0.745	0.724	0.725	0.728
Full (807)	All classes	960px	0.715	0.728	0.730	0.744
Full (807)	Bottles	960px	0.626	0.629	0.643	0.664
Full (807)	Bags	960px	0.782	0.816	0.804	0.818
Full (807)	Food containers	960px	0.737	0.739	0.742	0.750
Creek (180)	All classes	640px	0.593	0.540	0.554	0.538
Creek (180)	All classes	960px	0.563	0.497	0.530	0.536
Creek (180)	Bags	960px	0.232	0.174	0.204	0.194

Note. The creek-only bag row rests on 46 boxes. All values come from the same evaluation script, run on the same computer.

On the older phone photographs the four models are close. At 960 pixels v10 has the highest mAP@0.5 on the full test set (0.744) and in every class, but its lead over v8 and v9 is about 0.02 or less, which is within ordinary run-to-run variation. On the creek-only photographs v7 is ahead only at 640 pixels, the size it was trained at.

Table 13 shows the scores on pictures from the creek that the models were not trained on. The first rows are the 59 frames from the prototype's camera taken on October 28. These frames are crowded, with about 44 labelled items in each, and many of the items are very small. The remaining rows are the test half of the third session.

Table 13

mAP@0.5 on Pictures from the Prototype's Camera and on the Third-Session Test Half

Test set	Class	Image size	v7	v8	v9	v10
Prototype frames (59)	All classes	640px	0.019	0.108	–	–
Prototype frames (59)	All classes	960px	0.056	0.170	–	–
Prototype frames (59)	Bags	960px	0.054	0.234	–	–
Session 3 test (19)	All classes	640px	0.088	0.184	0.298	0.300
Session 3 test (19)	All classes	960px	0.149	0.204	0.337	0.404
Session 3 test (19)	Bottles	960px	0.242	0.287	0.356	0.397
Session 3 test (19)	Bags	960px	0.085	0.185	0.400	0.445
Session 3 test (19)	Food containers	960px	0.120	0.141	0.255	0.369

Note. v9 and v10 are not scored on the 59 prototype frames because both were trained on them. Only v10 was trained on pictures from the third session; the test pictures themselves were not used by any model. The session 3 test set holds 19 labelled pictures with 361 boxes. The test shrinks each whole picture to the image size, while the prototype crops the frame to the monitored area first, so the live system sees more detail than this test.

On the 59 frames from the prototype's camera, v8 scored clearly higher than v7 (0.170 against 0.056 mAP@0.5 at 960 pixels). v8 was trained on frames from the same creek spot on another day and v7 was not. The same pattern appears in the third session: the models that had seen more pictures from this spot scored higher, and v10, the only one trained on pictures from that day, scored highest in every class, with a mAP@0.5 of 0.404 against 0.204 for v8. This is fair for a camera fixed at one spot, but it means the result may not carry over to a new site. Every model scored lower at 640 pixels than at 960 pixels on these pictures, by 0.02 to 0.10, which supports keeping the detection size at 960 pixels on the Raspberry Pi. The scores are low for every model because the pictures are crowded and hold many small, partly submerged items. The models were scored on still images, so these results do not show how the system behaves live, such as flicker or false alarms from water and shadows.

A new model is installed from the Model card in the Settings tab, as a zip file or a folder under a version name. The Raspberry Pi checks it before use and keeps the running model if the check fails, and the card goes back to the previous model in one tap. Before v10 was trained, the researchers set a rule that a new model is put on the unit only if it gains at least 0.03 mAP@0.5 on camera pictures it has not seen, or clearly improves bag recall, and runs well live. On the third-session test half v10 met the first two conditions, with a mAP@0.5 0.200 higher than v8 and a bag recall of 0.427 against 0.267. On November 6, v10 ran on the unit for six hours. The live feed ran at 15 frames per second or more, the average processing time was 275ms per frame, and v10 made no false detections that described the floating barrier or other fixed objects as an item. The Raspberry Pi therefore runs v10 as its main model, with v8 kept as the fallback.

Table 14 gives the unit test results.

Table 14

Unit Testing Results

Test Case ID	Objective	Expected Result	Actual Result	Successful Trials / 10
TC_UNIT_01	Evaluate classification precision, recall and mAP@0.5	Precision of at least 0.80, with recall and mAP@0.5 indicated for each class	On the same 807 test images (Table 11): v10, the reported model, precision 0.846, recall 0.672, mAP@0.5 0.744, pass. For reference, v8 0.829, 0.674, 0.728, pass; v9 0.793, 0.702, 0.730, below the 0.80 precision target.	One evaluation run (not counted in trials)
TC_UNIT_02	Validate the accumulation counter logic	Alert raised once at the 20-item threshold and not again until the count falls to 15	The 19 automated counter tests passed. In 10 simulated runs on the Raspberry Pi, the alert came once at the threshold and not again until the count fell to the re-arm level.	10

Test Case ID	Objective	Expected Result	Actual Result	Successful Trials / 10
TC_UNIT_03	Verify the performance efficiency logging	Latency is calculated without the hardware crashing	Latency summaries were written every 100 frames. A recorded video was played through the Raspberry Pi 10 times without a crash. The average latency was about 180ms on the sub-stream with v7 and 250 to 300ms with v8 and later models.	10

Objective 2: Operation of the Raspberry Pi 5 Prototype

Table 15 gives the results of the system test plan in Table 5, run on the unit in the field.

Table 15

System Testing Results

Test Case ID	Objective	Actual Result	Successful Trials / 10
TC_SYS_01	Real-world object detection	Boxes appeared on the visible bottles, bags and food containers, and nothing was boxed on sunken items or leaves.	10
TC_SYS_02	Real-time accumulation alert	The Accumulation Alert was raised when the count passed the threshold.	10
TC_SYS_03	Real-time processing latency	Latency stayed steady over the run, with no crash or overheating. The average was 275 to 350ms (Table 19).	10
TC_SYS_04	System flow (end to end)	Every step happened in order, from switching on to the notification on the application (see the system flow test below).	10
TC_SYS_05	Live dashboard	The Monitor tab kept updating the boxes, labels, count and frame rate.	10
TC_SYS_06	Region of interest	The item was counted inside the monitored area and ignored outside it.	10
TC_SYS_07	Stable tracking and count	The item kept the same ID number while it drifted in and out of the area, and the count went up by one and then back down.	10
TC_SYS_08	Event storage	Both the alert and the Capture were stored in History with the time, counts and snapshot.	10

Test Case ID	Objective	Actual Result	Successful Trials / 10
TC_SYS_09	Alert delivery	The dashboard showed the alert, the buzzer sounded and the phone received a notification about 0.1 to 2 seconds later on the local network. Over Wi-Fi through the cloud the notification took 5 seconds or more.	10
TC_SYS_10	Threshold setting	The alert came at the new threshold value each time the count was repeated.	10

During the October 31 session, most detections were bottles, bags and food containers correctly labelled. The floating barrier across the creek was at first detected as an item. Redrawing the monitored area so that it excluded the barrier removed these false detections, which is the purpose of the region of interest tested in TC_SYS_06. On November 6 the unit made no false detections that described the barrier as an item.


System Flow Test

The system flow in Figure 29 was run on the bench on the evening of November 6, 2026, with the camera pointed at bottles on the floor instead of at the creek. The accumulation limit was lowered to 3 items so that a few bottles would reach it. The creek sessions used a limit of 15 to 25 (Tables 16 and 17). Each step is shown below as it appeared on the unit.

Step 1, the unit is switched on. The unit starts when the power switch of the UPS HAT inside the enclosure is pressed (Figure 62).

Figure 62

Switching On the Unit with the UPS HAT Power Switch

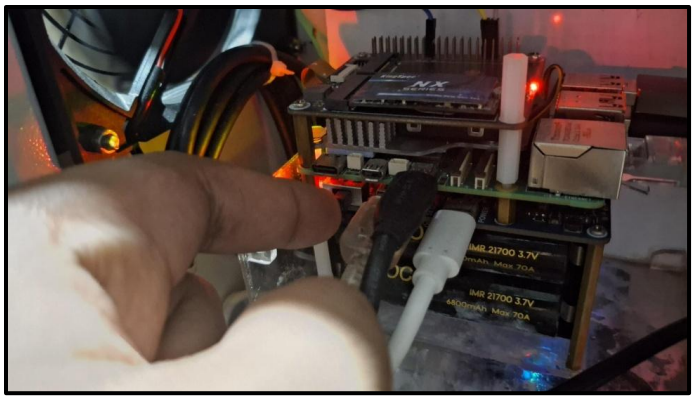


Note. Bench test on November 6, 2026. The finger rests on the power switch of the UPS HAT inside the enclosure.

Step 2, the Raspberry Pi starts. The desktop appears with the Garbage-Guard shortcut, and the notice at the top right shows that the link to the camera is connected (Figure 63). The shortcut opens the dashboard.

Figure 63

Raspberry Pi Desktop After Start-Up

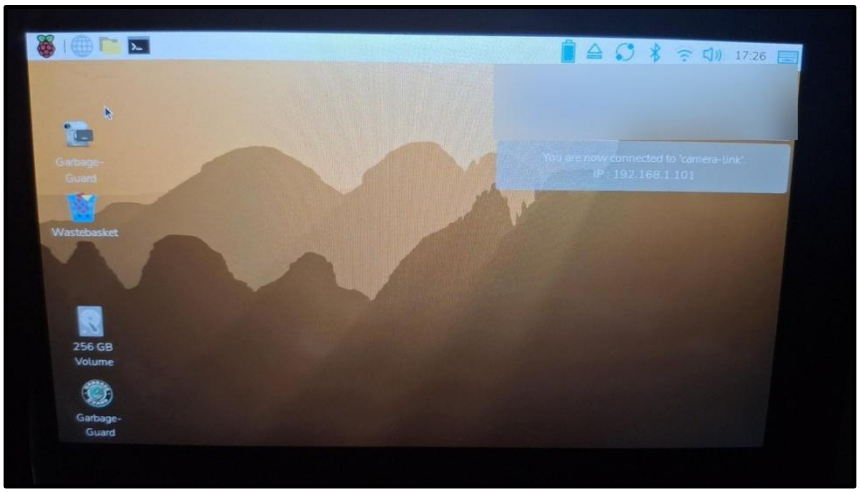


Note. Bench test on November 6, 2026. The desktop shows the Garbage-Guard shortcut and the notice that the camera link is connected. The Raspberry Pi clock had not yet taken the network time, so it reads 17:26. The notice about the Wi-Fi network is blurred.

Step 3, the camera feed is shown. The Monitor tab shows the live picture from the camera with the frame rate, the count of items inside the monitored area, the three class counters and the latency (Figure 64). With nothing in the area the count is 0 of 20.

Figure 64

Monitor Tab with the Live Camera Feed and No Items in the Area

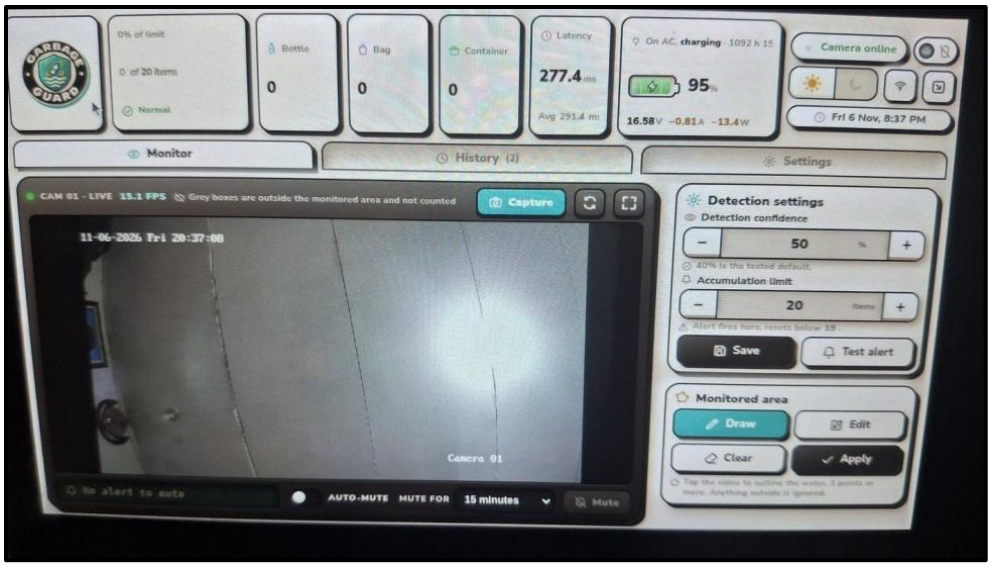


Note. Bench test on November 6, 2026, 8:37 PM. The feed runs at 15.1 frames per second with a latency of 277ms, and the count is 0 of 20 items.

Steps 4 to 6, items are placed, the count reaches the limit and the alert is raised. With four bottles inside the monitored area, each is boxed with its class and confidence, between 84% and 90%. The count of 4 passed the limit of 3, the counter turned red and read 133% of the limit with the words Alert raised, and the Accumulation alert banner appeared over the picture, with the message Accumulation alert is active below it (Figure 65).

Figure 65

Accumulation Alert on the Touchscreen with the Limit Set to 3

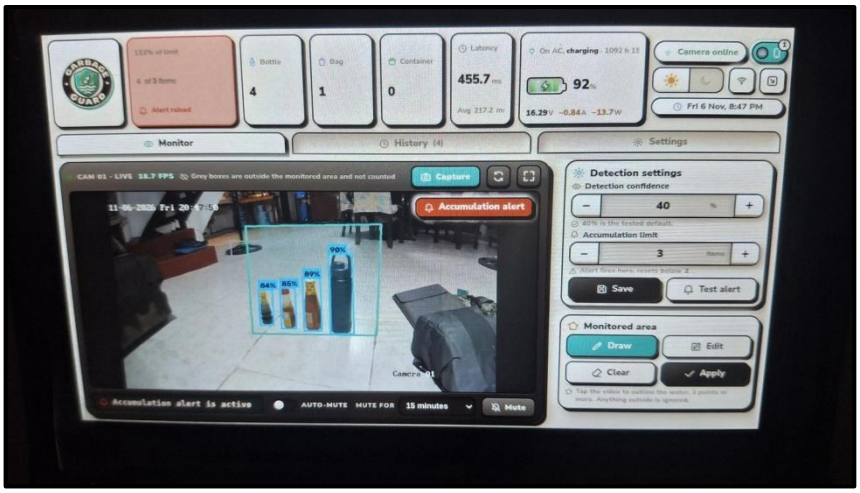


Note. Bench test on November 6, 2026, 8:47 PM, with four bottles on the floor and the accumulation limit lowered to 3 items. The monitored area is outlined in cyan.

Step 7, the buzzer sounds. The same event sounds the buzzer in the enclosure (Figure 66). The buzzer sounded in all 10 trials of TC_SYS_09 (Table 15).

Figure 66

Buzzer Module Inside the Enclosure

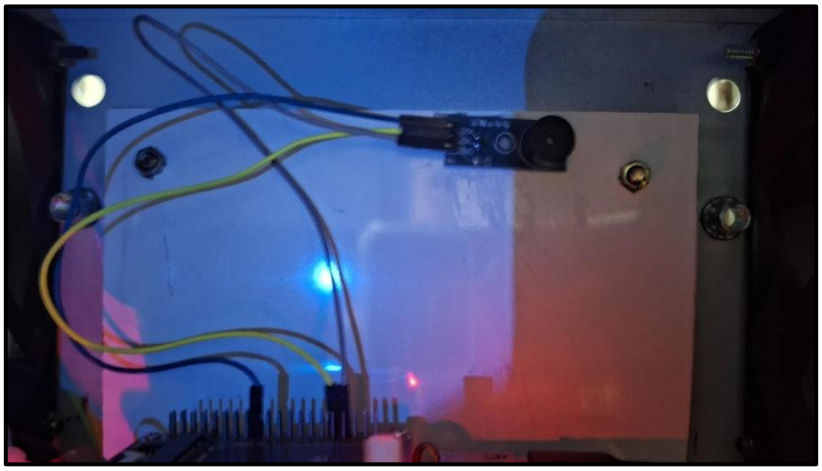


Note. The buzzer module is wired to the GPIO pins of the Raspberry Pi. A photograph cannot show the sound, which was heard in every trial of TC_SYS_09.

Step 8, the record is saved. The alert was stored in the History tab as record 106, Limit reached, at 8:47 PM with the number of items and a snapshot (Figure 67).

Figure 67

History Tab with the Saved Limit-Reached Record

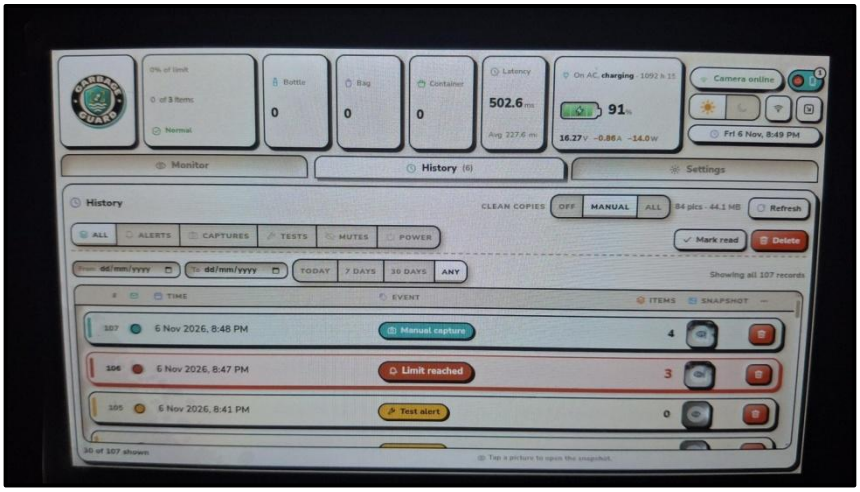


Note. Bench test on November 6, 2026, 8:49 PM. Record 106 is the alert at 8:47 PM with 3 items. Record 107 is a manual capture of 4 items, and record 105 is the test alert sent at 8:41 PM.

Step 9, the application is notified. A notification reached the phone with the number of items, the limit and the snapshot (Figure 68). The Monitor tab of the application then showed the same alert and the same counts as the touchscreen (Figure 69).

Figure 68


Accumulation Alert Notification on the Android Phone

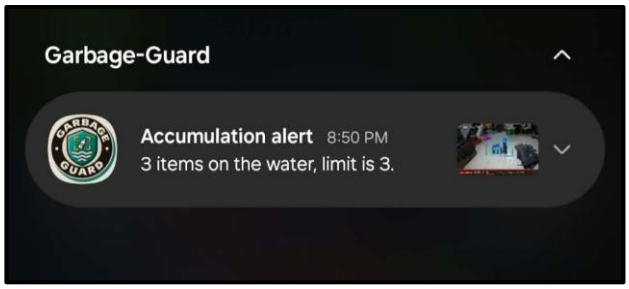

Note. November 6, 2026, 8:50 PM. The notification carries the snapshot of the camera picture.

Figure 69

Monitor Tab of the Android Application During the Alert

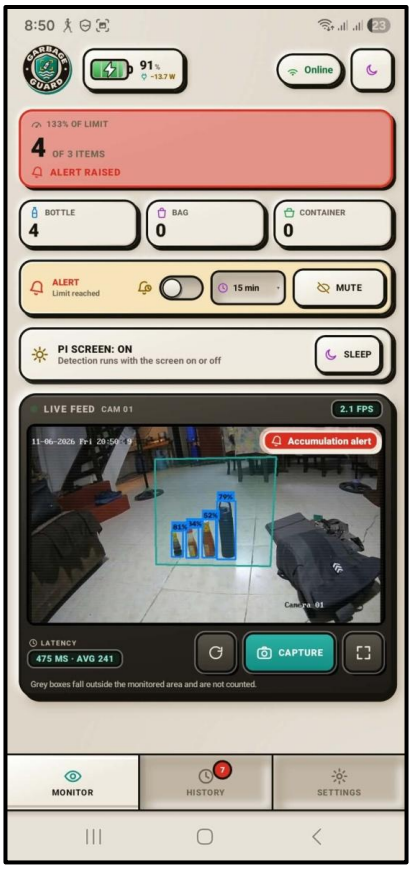

Note. November 6, 2026, 8:50 PM. The application shows the same alert and class counts as the touchscreen.

4.4 Field Deployment Results

The unit was operated on six days: October 17, October 31 and November 4, which were test sessions, and November 6, 7 and 9, the three days of the pilot deployment under the permit in Appendix D. Table 16 lists each session. The camera hung about 13ft (about 4m) above the water on November 6. The team lowered it to about 9ft (about 2.7m) on November 7 and to about 7ft (about 2.1m) on November 9.

Table 16

Field Deployment Log

Date	Time	Hours	Model and detection size	Camera stream	Threshold	Weather	Crashes or overheating
October 17, 2026	1:00 to 2:00 PM	1	v7	Sub-stream, 640px, 15fps	5	Cloudy, 30°C	None; nothing was detected
October 31, 2026	1:00 to 3:00 PM	2	v8, 960px	Main, 1280 x 720, 15fps	15	Sunny, 35°C	None
November 4, 2026	10:00 AM to 1:00 PM	3	v9	Main, 1280 x 720, 15fps	20	Sunny, 34°C	None
November 6, 2026	10:00 AM to 4:00 PM	6	v10	Main, 1280 x 720, 15fps	20	Sunny, 33°C	None
November 7, 2026	10:00 AM to 4:00 PM	6	v10	Main, 1280 x 720, 15fps	20	Sunny, 31°C	None
November 9, 2026	10:00 AM to 4:00 PM	6	v10	Main, 1280 x 720, 15fps	20	Sunny, 30°C	None

Across the six sessions the unit ran for 24 hours without a crash, a freeze or overheating. The detection threshold was 5 in the first session with v7, which detected nothing, and 15 to 20 in the later sessions. The highest detection confidence the team noted on the sheet rose from about 30% with v8 to about 50% with v9 and about 60% with v10 on November 6. On November 7 and November 9, with v10 and the monitored area in use, the sheet records an average confidence of 70 to 75% and 75 to 80%, with no issues.

The latency is measured from the moment a decoded camera frame reaches the program to the moment detection and tracking of that frame are finished, as defined in Equation 5. It does not include the camera's own encoding and network delay, which

added about one second between the scene and the touchscreen. During the October 31 session the dashboard showed an average of about 309ms (0.31s) per frame with v8 at 960 pixels, which falls in the Excellent band (below 0.5s). On November 6 the average with v10 was 275ms (0.28s), fluctuating between 250 and 300ms, and over the three deployment days the average stayed between 275 and 350ms (0.28 to 0.35s), also in the Excellent band, while the live feed ran at 15 frames per second or more. In bench tests with the main stream at 1280 x 720, the median latency was 186 to 191ms with about five frames processed per second, and the processor stayed at 68°C without throttling. Running a remote screen-sharing session on the Raspberry Pi at the same time raised the median to about 405ms, so all reported latencies were measured without screen sharing. Li et al. (2024) reported 33 frames per second for a very small YOLO model on an edge device. Garbage-Guard processes fewer frames per second, which is adequate for this task because floating waste moves slowly and the count is smoothed over 15 frames, about three seconds.

Table 17

Threshold Calibration Record

Date and time	Hand count in the monitored area	Dashboard count	Difference	Threshold before and after adjustment
November 6, 11:20 AM	58 (32 food containers, 11 bottles, 15 bags)	12	46	20 to 15
November 6, 12:20 PM	62 (35 food containers, 12 bottles, 15 bags)	16	46	15 to 20
November 6, 1:00 PM	62 (35, 12, 15)	19	43	20 to 20
November 6, 2:30 PM	62 (35, 12, 15)	19	43	20 to 20
November 7, 11:30 AM	30 (12 food containers, 6 bottles, 12 bags)	12	18	20 to 15
November 7, 12:30 PM	30 (12, 6, 12)	15	15	15 to 15
November 7, 1:30 PM	30 (12, 6, 12)	15	15	15 to 15

Date and time	Hand count in the monitored area	Dashboard count	Difference	Threshold before and after adjustment
November 9, 11:30 AM	41 (18 food containers, 8 bottles, 15 bags)	22	19	20 to 25
November 9, 12:30 PM	41 (18, 8, 15)	20	21	25 to 20
November 9, 2:00 PM	41 (18, 8, 15)	20	21	20 to 20

Note. The difference is the hand count minus the dashboard count. On November 6, with the camera about 13ft above the water, the dashboard counted 21%, 26%, 31% and 31% of the items counted by eye, which agrees with the field team's notes of about 20 to 30% detected. The team recorded that most of the trash was submerged or half submerged. Changing the threshold from 20 to 15 and back did not change what the dashboard counted, because the shortfall came from items the model did not detect and not from where the alert was set. After the camera was lowered to about 9ft, the dashboard counted 40%, 50% and 50% of the items on November 7, and with the camera at about 7ft it counted 54%, 49% and 49% on November 9. About half of the items were still missed. On November 7 the threshold was lowered to 15 at the first reading, when the count was 12. At the next two readings the count reached 15 and the alarm buzzed. On November 9 the count of 22 reached the threshold of 20 and the alarm buzzed, and the team raised the threshold to 25. The count then stayed at 20 to 22, so they lowered it back to 20, and at the last reading the count of 20 reached it and the alarm sounded again. The threshold was left at 20, the default. The team's note on the sheet says that no trash was added to the creek until 4:00 PM and that the system's detection stayed the same, so they ended the day.

4.5 Evaluation Results

This section reports the acceptance test plan set during requirement gathering (Tables 6 to 8 in Chapter III): the developer-side test cases and indicators first, then the end-user usability survey.

Developer-side evaluation

Table 18

Developer-Side Internal Acceptance Results

Indicator Code	Evaluation Statement (Table 7)	Result	Table 3 Rating
DEV-FS1	Accurate detection of the three classes, ignoring sunken debris and organic matter	74.7% (295 of 395 labels correct over three days, Equation 3, TC_ACC_01); 85.0% on November 9	Fair
DEV-FS2	Accumulation Alert raised when the threshold is reached	The alert was raised in 10 of 10 trials, a success rate of 100% (Equation 4, TC_SYS_02)	Excellent
DEV-PE1	Latency below 3.0 seconds per frame	Average 275 to 350ms (0.28 to 0.35s) per frame	Excellent
DEV-PE2	Continuous operation without crashing or overheating	No crash, freeze or overheating in 24 hours over six days	Excellent

Table 19 gives the results of the acceptance test cases in Table 6, run on the final build during the field deployment.

Table 19

Acceptance Testing Results

Test Case ID	Objective	Actual Result	Successful Trials / 10
TC_ACC_01	Functional Suitability (classification)	295 of 395 labels correct over the three days (74.7%, Equation 3), in the Fair band and below the 80% target. By day, 70 of 112 on November 6 (62.5%, camera at about 13ft), 100 of 136 on November 7 (73.5%, about 9ft) and 125 of 147 on November 9 (85.0%, about 7ft). Only the last day, in the Good band, reached the target.	Three counts of 112, 136 and 147 labels (not counted in trials)
TC_ACC_02	Functional Suitability (accumulation detection)	The field sheet notes that the alarm buzzed each time the dashboard count reached the threshold on November 7 and 9 (Table 17), and the alert was raised in 10 of 10 trials of TC_SYS_02 (Table 15).	10/10 Trials successful
TC_ACC_03	Performance Efficiency (latency and stability)	Average latency of 275 to 350ms (0.28 to 0.35s) over the three deployment days with no crash, in the Excellent band and well inside the Table 6 target of 3.0s or faster.	10 /10 Trials successful

End-user evaluation

Four end users answered the usability survey on November 6, 2026, after using the touchscreen and the application at the creek: two Estero Rangers (DENR Garbage Collectors assigned at the Barangay), a barangay kagawad and a barangay secretary. The weighted mean of each statement was computed with the formula given under Table 9 in Chapter III and read against Table 9.

Table 20

End-User Usability Survey Results

Indicator Code	Evaluation Statement (Table 8)	Weighted Mean	Interpretation
USR-U1	Information on the monitor is easy to read and understand	4.50	Excellent
USR-U2	Bounding boxes clearly show where the garbage is	4.25	Excellent
USR-U3	The Accumulation Alert is clear and noticeable	4.25	Excellent
USR-U4	The system gives helpful insights for monitoring	4.75	Excellent
USR-U5	The application matches the touchscreen	4.25	Excellent
	Overall	4.40	Excellent

All five statements fall in the Excellent band, with an overall weighted mean of 4.40. The system gave helpful insights for monitoring (USR-U4) was rated highest at 4.75. Statements USR-U2, USR-U3 and USR-U5 were tied for lowest at 4.25, still in the Excellent band. Only one rating, a 3 for the clarity of the Accumulation Alert, was below 4. In their written comments, three respondents called the system a good and helpful tool for the barangay and the Estero Rangers in monitoring garbage in waterways. One respondent suggested improving the detection of plastic bags, bottles and containers so that cleaning can be faster.

4.6 Project Capabilities and Limitations

Capabilities

- Detects bottles, bags and food containers with a precision of 84.6% (v10, the reported model) on the frozen test set of 807 images, meeting the 80% target (Section 4.3).
- Counts only the items inside the monitored area. Redrawing the area removed false detections of the floating barrier at the creek (Section 4.3).
- Raises one Accumulation Alert per build-up, with smoothing over 15 frames and a re-arm level that prevents repeated alarms (TC_UNIT_02).
- Processes frames in about 0.28 to 0.35 seconds on the Raspberry Pi 5 (Excellent band), with the picture about one second behind the scene (Section 4.4).
- Stores every event with a snapshot, shows it on the touchscreen and the application, and reaches the application away from the local network through Firebase.
- Runs on its UPS battery, shows the remaining charge and shuts down safely before the battery runs out.
- The prototype has the capability to change the threshold, detection size, camera stream and model from the dashboard, without editing code.

Limitations

- Bags in the older creek photographs are rarely detected: v10 has a recall of 0.152 on 46 bag boxes. On the third-session test pictures its bag recall is 0.427. Piles with many bags will still be undercounted.
- Recall is lower than precision in every class, so the count tends to be too low rather than too high. More than half of the bottles in the creek photographs are missed (a recall of 0.450).

- Precision on creek images is lower than on the full test set: 68.9% against 84.6% for v10, which is in the Poor band of Table 3.
- Most false detections are labelled as bottles. Fixed objects in the water, such as the floating barrier, must be kept outside the monitored area.
- The enclosure is no longer IP65 after the cut-outs for the screen, fans and cables, so the unit has to be placed under cover.
- The two case fans run from the USB ports of the power extension, so they stop when mains power fails and the unit runs on its battery.
- The built-in Wi-Fi of the Raspberry Pi 5 did not work during testing, so internet access depends on a USB Wi-Fi adapter mounted outside the enclosure.
- The camera clock resets when the camera loses power, so the date stamped in the video can be wrong. The records use the Raspberry Pi's clock and are not affected.
- The third-session test pictures come from the same spot and the same day as the 27 third-session pictures v10 was trained on, so they show how v10 does at this creek, not at a new site. The test set holds only 19 labelled pictures.
- The results come from one site and one training run for each model, so differences of a few points, such as the 0.016 mAP@0.5 between v10 and v8 on the frozen test set, may be ordinary run-to-run variation.
- The bag result on the creek-only photographs rests on 46 boxes.
- The scores were measured on still photographs, not on live behavior such as flicker and false alarms on water and shadows.
- With the camera about 13ft above the water, most items in the creek were submerged or half submerged, and the dashboard counted only 21 to 31% of the items counted by eye on November 6 (Table 17). After the camera was lowered to about 9ft on November 7 and about 7ft on November 9, it counted

40 to 54%, so about half of the items were still missed. Live classification rose each time the camera was lowered: 62.5% at about 13ft on November 6, 73.5% at about 9ft on November 7 and 85.0% at about 7ft on November 9 (TC_ACC_01). Only the last day reached the 80% target, and the researchers attribute the rise to the lower camera position.

V. CONCLUSIONS

This chapter closes the study. It summarizes the findings reported in Chapter IV, states the conclusions drawn from them for each specific objective, and gives recommendations for future researchers and for the offices that may adopt the system.

5.1 Summary of Findings

The study set out to develop a computer vision system that detects floating garbage in creeks with a convolutional neural network and YOLO26n, counts how much of it has built up in a monitored stretch of water, and alerts the people responsible once the count reaches a set level. The result is Garbage-Guard, a fixed monitoring unit built around a Raspberry Pi 5 and a Hikvision HiWatch HWI-B140H camera, with a touchscreen dashboard on the unit and an Android application for remote use. It was operated at a creek in Barangay 870, Pandacan, Manila. The following are the main findings.

1. Ten training runs were completed (v1, v3, v4, v5, v6, v6b, v7, v8, v9 and v10). Public datasets alone stopped improving the model after v3, and the scores rose only once the researchers added their own creek photographs in v5, which lifted bottles and food containers (mAP@0.5 from 0.687 to 0.761). Two runs were found to be unreliable during the process: v6 had silently dropped every styrofoam image, and rebuilding the dataset for v6b moved some test images into training. The test partition was therefore frozen at 20% of the data from v7 onward.
2. On the frozen test set of 807 images, v10, the reported model, reached a precision of 84.6%, a recall of 67.2% and a mAP@0.5 of 0.744. Its precision falls in the Good band of Table 3 and meets the 80% target set in Section 1.3. On the 180 creek images within that set, precision dropped to 68.9% (Poor) and mAP@0.5 to 0.536. Food containers were the strongest class (creek mAP@0.5 of 0.825) and bags the weakest (creek recall of 0.152 on 46 boxes). Recall was lower than

precision in every class. The earlier models scored close to v10 on the same set: v7 reached a precision of 85.2% and v8, the model used in the October 31 session, 82.9% (Tables 10 and 11). On the 19 test pictures from the third data session, v10 reached a mAP@0.5 of 0.404 against 0.204 for v8, helped by having been trained on other pictures from the same spot and day (Table 13).

3. The prototype detects, tracks and counts items only inside the monitored area drawn by the operator. The accumulation counter passed all 19 automated tests, raising the Accumulation Alert once when the smoothed count reached the threshold and not again until the count fell to the re-arm level. In the system tests, all ten test cases in Table 15 met their expected result in 10 of 10 trials. During the October 31 session the floating barrier across the creek was at first detected as an item, and redrawing the monitored area to exclude it removed those false detections. On November 6 no fixed object was detected as an item.
4. During the October 31 session, the unit processed each frame in about 309ms (0.31s) with v8 at a detection size of 960 pixels, which is in the Excellent band of Table 3 (below 0.5s). Bench tests on the 1280 x 720 main stream gave a median of 186 to 191ms at about five frames per second, with the processor at 68°C and no throttling. The picture on the touchscreen ran about one second behind the scene because of the camera's own encoding and network delay, which the latency measure does not include. A 1920 x 1080 main stream was too heavy to decode and fell six to seven seconds behind. Over the three deployment days, with v10, the average latency was 275 to 350ms (0.28 to 0.35s), again in the Excellent band.
5. The unit was operated at the creek for six days and 24 hours in daylight (Table 16). It ran without a crash, a freeze or overheating. The threshold was calibrated on site against hand counts on November 6, 7 and 9. Changing it did not change what the dashboard counted, and on November 9 the count settled at 20 to 22, so the threshold was kept at 20 items (Table 17).

6. In the developer-side acceptance test, the system rated Fair for classification (DEV-FS1) and Excellent for the Accumulation Alert (DEV-FS2) under Functional Suitability, and Excellent for both DEV-PE1 and DEV-PE2 under Performance Efficiency (Table 18). Live classification in the field reached 74.7% over the three days (295 of 395 labels correct), in the Fair band and below the 80% target (TC_ACC_01). It rose from 62.5% on November 6 to 73.5% on November 7 and 85.0% on November 9, the only day above the target. The count of alerts against threshold crossings (TC_ACC_02) was not written on the field sheet, but the Accumulation Alert was raised in 10 of 10 trials of TC_SYS_02 (Table 15), and the alarm buzzed whenever the count reached the threshold on November 7 and 9 (Table 17).
7. Four end users, two Estero Rangers, a barangay kagawad and a barangay secretary, answered the usability survey after using the system at the creek. They gave a weighted mean of 4.40 across the five usability statements, interpreted as Excellent under Table 9. The highest-rated statement was USR-U4 (4.75) and the lowest were USR-U2, USR-U3 and USR-U5 (4.25 each).

5.2 Conclusions

Derived from the findings in relation to the objectives of the study, the researchers reached the following conclusions.

1. The first objective was met on the frozen test set. YOLO26n, exported to NCNN, detects bottles, bags and food containers with a precision of 84.6% (v10, the reported model), above the 80% target, and the earlier v7 (85.2%) and v8 (82.9%) met it as well. The creek-only precision of 68.9% for v10 shows that the model is weaker under field conditions than its headline figure suggests, the same kind of gap Nunkhaw et al. (2025) reported for floating waste in urban canals. The training history also shows what moved the result: images taken at the deployment site improved the model more than any amount of public data, and

adding pictures from the third data session doubled the score on new pictures from the same spot (a mAP@0.5 of 0.404 against 0.204 for v8). This agrees with the point raised by Jia et al. (2023) that floating-litter detection suffers from a lack of data that matches real waterways.

2. The second objective was met. A Raspberry Pi 5 can run detection, ByteTrack tracking, area-limited counting, smoothing, alerting, event storage, the dashboard and the cloud link on one board, from a battery, without a separate computer. The monitored area does more than save processing time. It is also the operator's tool for keeping fixed objects such as the floating barrier out of the count, so drawing it carefully is part of installing the unit, not only a simple afterthought.
3. Because recall is lower than precision, the system is more likely to count too few items than too many. In practice this means an alert will tend to come late rather than early, and false alarms are rare. The researchers concluded that the threshold should be set from an on-site hand count rather than left at the default, which is what the field calibration showed: the dashboard counted 21 to 31% of the items counted by eye on November 6 and 40 to 54% after the camera was lowered, and the threshold ended at 20.
4. The third objective was met for Performance Efficiency. At about 0.28 to 0.35 seconds per frame the Raspberry Pi 5 is well inside the Excellent band, and floating waste moves slowly enough that five frames per second, smoothed over 15 frames, is sufficient. Li et al. (2024) reached 33 frames per second with a very small YOLO model on an edge device, but for a counting task on slow water the extra speed would not change the alert. Functional Suitability in the field fell below the target overall: live classification was 74.7% over the three days (Fair, against the 80% target), although it rose each time the camera was lowered and reached 85.0% on November 9 with the camera at about 7ft, down from about 13ft on November 6. The researchers attribute this rise to the lower camera

position. The dashboard counted 21 to 31% of the items counted by eye on November 6 and 40 to 54% on November 7 and 9, because most items were submerged or half submerged. Usability was rated Excellent (4.40) by the end users.

5. The research gap set out in Section 2.4 and Table 2 was addressed. None of the systems reviewed combined a detector trained by the operator, running at the edge at creek level, with counting limited to a drawn area of water, one identity per item across frames, and a threshold alert backed by a saved snapshot. Garbage-Guard puts these together in one unit and was shown to work at a real creek under a barangay permit.

Several lessons came out of the work that may help later researchers. A test set has to be fixed once and never rebuilt, or the scores of later runs cannot be compared; this was the adviser's requirement from v7 onward, and the v6 and v6b problems showed why. Detecting small items far from the camera depended more on how the picture reached the model than on the model itself: cropping the full-resolution main stream to the monitored area kept bottles and bags large enough to detect, while a higher camera resolution only made the Raspberry Pi fall behind. A labelled snapshot with a clean copy beside it turned out to be useful twice, first as evidence for each alert and then as new training data.

The prototype has limits that the results make plain. It works in daylight only and covers one stretch of creek from one camera at about 5ft to 6ft. Bags at the creek are rarely detected, so piles made mostly of plastic bags will be undercounted. The count says how many items are present, not how much space they cover, so a few large items and many small ones can give the same reading. The enclosure lost its weather rating once it was cut for the screen, fans and cables, so the unit must stand under cover with only the camera outside. The two USB case fans draw power from the USB ports of the power extension, so they stop when mains power fails and the unit runs on its battery. The built-in Wi-Fi of the Raspberry Pi 5 could not join a network during testing, so

internet access depends on a USB Wi-Fi adapter mounted outside the box, and the camera's clock resets whenever it loses power.

The end users who took part in the survey described the system as a good and helpful tool for the barangay and the Estero Rangers in monitoring garbage in waterways, and one asked for better detection of plastic bags, bottles and containers so that cleaning is faster.

Garbage-Guard is therefore a workable early-warning tool for barangays and LGUs that must decide when a stretch of creek needs clearing. It replaces a periodic walk along the bank with a continuous count and a dated record of every build-up. In doing so it supports UN Sustainable Development Goals 6, 9 and 11 (United Nations, 2025).

5.3 Recommendations

As an improvement to the limitations identified in this study, the researchers recommend the following to future researchers and to the offices that may adopt the system.

1. **Collect more creek images of bags.** Bags were the weakest class at the creek, with a recall of 0.152 for v10, measured on only 46 bag boxes in the creek photographs. Future researchers should photograph and label plastic bags in the water at the deployment site, in different states of floating and sinking, and enlarge the creek portion of the test set so that each class is judged on more than a few dozen images.
2. **Retrain from the unit's own snapshots.** The clean copies saved with every alert and capture are already in the form needed for labelling. A future version should make this a routine: label the clean copies, retrain on them, and test on the frozen set before replacing the model on the unit, as a new sprint of the development model in Figure 45.
3. **Extend operation to night and poor light.** Night operation was left out of this study by design. Future work should test an infrared camera or a camera with

better low-light sensitivity, add night images to the training data, and report day and night results separately.

4. **Scale to more than one camera and use wireless cameras.** The prototype reads one camera through a single Ethernet cable, and at the deployment site a 40m cable was needed to link the unit in the barangay building to the camera on the bridge (Figure E10 in Appendix E). Future work may connect several cameras to the same unit so that one barangay can watch more than one stretch of creek, with a drawn area and a count for each camera. A wireless camera would remove the long cable run, although it would still need its own power source and a stable link to the unit. The Raspberry Pi 5 processed a single stream in 275ms to 350ms per frame in this study, so the number of cameras that one unit can serve should be tested, and a second unit or a more powerful processor may be needed beyond that number.
5. **Reach longer distances with a higher-quality or zoomable camera.** If the system has to detect items farther than the 5 to 6m used in this study, the researchers recommend a camera of higher quality, such as one with a higher resolution or a longer lens like the 6mm version of the same HiWatch camera. A motorized varifocal camera would let the operator zoom from the dashboard. Either choice puts more pixels on each item at the same distance, at the cost of a stronger power supply for the camera and a heavier load on the Raspberry Pi, which could not decode the 1920 x 1080 main stream fast enough in this study.
6. **Estimate the amount of garbage, not only the number of items.** A count treats a bottle cap and a large container alike. Instance segmentation, compared with bounding boxes by Kataoka et al. (2024), could estimate the area of water covered by waste, which says more about the risk of a blockage than the number of pieces.
8. **Make the network independent of the site.** Since the built-in Wi-Fi failed during testing, a future unit should carry its own connection, such as a USB LTE

modem, so it can be placed where no Wi-Fi exists. A LoRa radio is another option for sending the count and the alert message without Wi-Fi, since LoRaWAN has already been used for flood monitoring (Te et al., 2024).

10. **Deploy longer, at more sites and in the rainy season.** The field test ran for six days and 24 hours in daylight at one creek. A deployment of several weeks across the dry and rainy seasons, at more than one creek, would show how the model handles high water, debris after storms and changing light.
11. **Combine the count with water-level sensing.** Flood monitoring systems such as those of Te et al. (2024) and Arante et al. (2025) alert on sensor readings. Pairing the garbage count with a water-level sensor at the same point could give barangays an earlier flood warning, since a blocked creek and a rising water level together point to a flood risk that neither shows alone.
12. **Add data analytics to the stored records.** The unit already writes every alert, suppressed event and capture to a local SQLite database with its time, the count per class, the peak confidence, the threshold in use and the path of its snapshot, and the History tab lists these records one by one. Future work should build analytics on top of them, such as counts per hour, day and week, the time of day when alerts occur, the share of bottles, bags and food containers, and the effect of camera position or rainfall on the count, shown as charts in the History tab and in a report that a barangay can export. Trends of this kind could help a barangay schedule a cleanup before the count reaches the threshold, and the same records could show how detection quality changes between sites and seasons. The analysis should keep the hand-count check used in this study, since the dashboard count ran below the hand count.
13. **For barangays and LGUs.** Units should be placed upstream of culverts, bridges and drainage outfalls, where floating waste is most likely to collect and cause a blockage. The camera should be mounted as low and as close to the water as the

site allows: after it was lowered from about 13ft to about 9ft and then 7ft, the dashboard counted 40 to 54% of the items counted by eye instead of 21 to 31% (Table 17), and live classification rose from 62.5% to 85.0% (TC_ACC_01). The threshold at each site should be set from a hand count during installation and reviewed after the first few alerts, and the alert history should be used to plan cleanup schedules.

VI. ACKNOWLEDGMENT

The researchers wish to sincerely thank all those who assisted in the completion of this study. Garbage-Guard was not built by the researchers alone; the guidance, patience and support of the following individuals shaped this work from the first proposal to the final prototype.

To Dr. Jonel R. Macalisang, the researchers' thesis adviser, for helping shape the content and providing the technical direction for the study. The comments helped the researchers examine their work more closely and provide supporting evidence for every claim. Most importantly, this guidance helped the researchers keep the project focused on its end goal.

To Prof. Ma Ian Delos Trinos, the professor of the Project Development subject, for helping the researchers with the formatting and organization of the paper. The careful review of each chapter made sure that the document met the format required by TUP-Manila and CIT.

To Prof. Ardie V. Ardiente, the researchers' outside consultant, for generously giving time and expertise to the technical aspects of the project, and for the practical suggestions that helped the researchers solve numerous problems. The researchers truly appreciated the guidance and advice at every point in the process and the willingness to answer their questions.

To the researchers' families, for their patience, encouragement, and support during the numerous long and demanding days and weeks of this process. They deserve credit for this work and for bearing the pressures of having a family member so preoccupied with research and building something that was at times unreliable and unbearably slow.

To their friends, for the help and companionship they willingly offered and for a good laugh, and for reminding the researchers to not give up and to keep working on this project until it was completed.

VII. DECLARATION OF CONFLICT OF INTEREST

The researchers declare that they have no financial, personal or professional relationship with any funding agency, company, testing center, sponsor or respondent that could have influenced the design, conduct or reporting of this study. The study received no external funding. The costs of the hardware, software and field deployment of Garbage-Guard were shouldered by the researchers, and no supplier of the components or services named in this paper took part in the testing or evaluation of the system.

The field deployment at the creek site was carried out with the permission of the concerned authorities, and the evaluation survey was answered voluntarily by respondents who were told the purpose of the study. The personal information of the respondents was kept confidential and used only for this study, in compliance with the Data Privacy Act of 2012 (Republic Act No. 10173). The camera recorded the creek surface for garbage detection only, and no image was used to identify any person.

Generative AI tools were used only to assist with language editing and as a coding assistant in parts of the software development. Every output was reviewed, tested and verified by the researchers, who take full responsibility for the content of this paper and for the system it describes.

The researchers affirm that the statements in this declaration are true and correct.

BRIAN JAY CELESTE
Researcher

GENESIS WALTER D. REYES II
Researcher

JADE C. GUNAYAN
Researcher

KING PERTH G. PEPITO
Researcher

RODEL S. BANOGBANOG
Researcher

VIII. REFERENCES

Acot, F. T., Sajorne, R. E., Omar, N.-A. K., Suson, P. D., Rallos, L. E. E., & Bacosa, H. P. (2022). Unraveling macroplastic pollution in rural and urban beaches in Sarangani Bay Protected Seascape, Mindanao, Philippines. *Journal of Marine Science and Engineering, 10*(10), 1532. https://doi.org/10.3390/jmse10101532

Al Noman, Z., Li, F. H., Almukhtar, F., Rahaman, B., Omarov, S. Ray, Shahajan Miah, C., Wang, C. (2022). A computer vision-based lane detection technique using gradient threshold and hue-lightness-saturation value for an autonomous vehicle. International Journal of Electrical and Computer Engineering (IJECE). https://ijece.iaescore.com/index.php/IJECE/article/view/27007

Arante, H. R. C., Sybingco, E., Roque, M. A., Ambata, L., Chua, A. Y., & Gutierrez, A. N. (2025). *Development of a secured IoT-based flood monitoring and forecasting system using genetic-algorithm-based neuro-fuzzy network*. *Sensors, 25*(13), 3885. https://doi.org/10.3390/s25133885

Balachandran, N., & Talavera, O. (2023). *Apparatus and Method for Waste Monitoring and Analysis* (US11788877B2). Google Patents. https://patents.google.com/patent/US11788877B2

Campbell, D. P., Gormley, M., Kelly, D., Xue, Y., & Stewart, C. (2022). *Drainage monitoring apparatus and system* (WO2022254204A1). Google Patents. https://patents.google.com/patent/WO2022254204A1/en

Chen, L., Li, G., Xie, W., Tan, J., Li, Y., Pu, J., Chen, L., Gan, D., & Shi, W. (2024). A survey of computer vision detection, visual SLAM algorithms, and their applications in energy-efficient autonomous systems. Energies, 17(20), 5177. https://doi.org/10.3390/en17205177

Chordiya, S. B., Das, S., Garg, R., Jain, V., Kumar, A., Nagpure, S. G., Nagvekar, Y. D., Parlikar, A. S., Regulwar, G. B., & Saini, D. K. (2020, September 9). *AU202010219 1A4 - WCM-Smart City: Waste Collection and Management under Smart City Using IoT - Google Patents*. https://patents.google.com/patent/AU2020102191A4/en?q=(WCM-Smart+City:+WASTE+COLLECTION+AND+MANAGEMENT+UNDER+SMART+CITY+USING+IOT)&oq=WCM-Smart+City:+WASTE+COLLECTION+AND+MANAGEMENT+UNDER+SMART+CITY+USING+IOT

Circuitrocks. (n.d.-a). *Raspberry Pi 5 quad-core Cortex-A76 4GB/8GB/16GB* [Product page]. Retrieved October 23, 2026, from https://circuit.rocks/products/raspberry-pi-5-2-4ghz-quad-core-arm-cortex-a76-4gb-8gb-16gb

Circuitrocks. (n.d.-b). *Passive buzzer module for Arduino/AVR/PIC* [Product page]. Retrieved October 23, 2026, from https://circuit.rocks/products/buzzer-5v-breadboard-friendly

Corpuz, J. C. G. (2025). Wastewater management in the Philippines: A call for localized solutions and policy integration. *Environmental Health Insights, 19*. https://doi.org/10.1177/11786302241311529

Das, T., Das, N., Zuthi, M. F. R., Pal, S. K., Kraft, E., Thomas, H., & Kuehlewindt, S. (2025). *Plastic waste in marine ecosystems: Identification techniques and policy interventions*. Water, Air, & Soil Pollution, 236, 478. https://www.researchgate.net/publication/391870234_Plastic_Waste_in_Marine_Ecosystems_Identification_Techniques_and_Policy_Interventions

Den Hartog, E. D., & Voncken, R. G. H. (2017). *System for monitoring water drainage* (WO2017089181A1). Google Patents. https://patents.google.com/patent/WO2017089181A1/en

Development Asia. (2024, February 28). *Optimizing Municipal Waste Collection in the Philippines through a Smart App*. Retrieved March 8, 2026, from https://development.asia/case-study/optimizing-municipal-waste-collection-philippines-through-smart-app

Ella, D. M., Lim, D. M., Lu, B., & Cabauatan, R. (2022). *The impact of solid waste management to the economic growth in selected OECD countries and Philippines*. Journal of Economics, Finance and Accounting Studies, 4(1). https://doi.org/10.32996/JEFAS.2022.4.1.20

Garcia, A., Saez, Y., Harris, I., Huang, X., & Collado, E. (2025). *Advancements in air quality monitoring: a systematic review of IoT-based air quality monitoring and AI technologies*. Artificial Intelligence Review, 58(9), 275. https://doi.org/10.1007/s10462-025-11277-9

Gryech, I., Assad, C., Ghogho, M., & Kobbane, A. (2024). *Applications of machine learning & Internet of Things for outdoor air pollution monitoring and prediction: A systematic literature review*. *Engineering Applications of Artificial Intelligence, 137*, 109182. https://doi.org/10.1016/j.engappai.2024.109182

JB Hi-Fi. (n.d.). SanDisk High Endurance microSDXC 64GB memory card [Product page]. Retrieved October 19, 2026, from https://jbhifi.com.au/products/sandisk-high-endurance-microsdxc-64gb-memory-card

Jia, T., Vallendar, A. J., de Vries, R., Kapelan, Z., & Taormina, R. (2023). Advancing deep learning-based detection of floating litter using a novel open dataset. Frontiers in Water, 5, 1298465. https://doi.org/10.3389/frwa.2023.1298465

Kang, J., Tariq, S., Oh, H., & Woo, S. S. (2022). A survey of deep learning-based object detection methods and datasets for overhead imagery. *IEEE Access, 10*, 20118–20134. https://doi.org/10.1109/ACCESS.2022.3149052

Kataoka, T., Yoshida, T., & Yamamoto, N. (2024). Instance segmentation models for detecting floating macroplastic debris from river surface images. Frontiers in Earth Science, 12, 1427132. https://doi.org/10.3389/feart.2024.1427132

Kim, H., Lee, S., Yu, G., & Kang, J. (2019, January 4). *KR101985436B1 - Cleaning unit using the deep-learning - Google Patents*. https://patents.google.com/patent/KR101985436B1/en?q=(floating+trash+detection+deep+learning)&oq=floating+trash+detection+using+deep+learning

KingSpec. (n.d.). M.2 NVMe SSD in series [Product page]. Retrieved October 19, 2026, from https://www.kingspec.com/product/m2-nvme-ssd-in-series.html

Li, B., & Wang, F. (2020, June 23). *CN111767822B - Garbage detection method, related equipment and device - Google Patents*. https://patents.google.com/patent/CN111767822B/en?oq=CN111767822B

Li, H., Yang, S., Zhang, R., Yu, P., Fu, Z., Wang, X., Kadoch, M., & Yang, Y. (2024). Detection of floating objects on water surface using YOLOv5s in an edge computing environment. Water, 16(1), 86. https://doi.org/10.3390/w16010086

Liu, N., Liu, P. J., Su, M. R., Zhao, B. H., Liu, Y., Wang, W., & Yuan, Z. F. (2022). *Detection and monitoring of waste disposal in an environmental location using artificial intelligence* (US11308603B2). Google Patents. https://patents.google.com/patent/US11308603B2

MacAfee, E. A., & Löhr, A. J. (2023). *Multi-scalar interactions between mismanaged plastic waste and urban flooding in an era of climate change and rapid urbanization*. WIREs Water. https://doi.org/10.1002/wat2.1708

Magyar, D., Cserép, M., Vincellér, Z., & Molnár, A. D. (2023, March 25). Waste Detection and Change Analysis based on Multispectral Satellite Imagery. *arXiv*. https://doi.org/10.48550/arXiv.2303.14521

MakerLab. (n.d.-a). *Official Raspberry Pi 5 Active Cooler* [Product page]. Retrieved October 23, 2026, from https://www.makerlab.ph/products/official-raspberry-pi-5-active-cooler

MakerLab. (n.d.-b). *PKCell lithium-ion 18650/21700 battery 3.7V* [Product page]. Retrieved October 23, 2026, from https://makerlab.ph/products/pkcell-lithium-ion-18650-21700-battery-3-7v-true-rated-18650-2200mah-3000mah-3350mah-4500mah-rechargeable-battery-for-power-bank-flashlight-mini-fan

MakerLab. (n.d.-c). *USB 5V to 12V DC-DC converter cable jack step-up power module* [Product page]. Retrieved October 23, 2026, from https://makerlab.ph/products/dc-dc-converter-cable-usb-5v-to-12v-dc-jack-step-up-power-module

MakerLab. (n.d.-d). *7 inch HDMI LCD for Raspberry Pi* [Product page]. Retrieved October 23, 2026, from https://makerlab.ph/products/7-inch-hdmi-lcd-for-raspberry-pi

MakerLab. (n.d.-e). *1.5m HDMI to micro HDMI cable* [Product page]. Retrieved October 23, 2026, from https://makerlab.ph/products/hdmi-to-micro-hdmi-cable

MakerLab. (n.d.-f). *Pulihua CAT 5E RJ45 UTP internet cable* [Product page]. Retrieved October 23, 2026, from https://makerlab.ph/products/ethernet-cable-computer-network-cord

Meijer, L. J. J., van Emmerik, T., van der Ent, R., Schmidt, C., & Lebreton, L. (2021). More than 1000 rivers account for 80% of global riverine plastic emissions into the ocean. *Science Advances, 7*(18), eaaz5803. https://doi.org/10.1126/sciadv.aaz5803

Multi-Line. (n.d.). HWI-B140H [Product page]. Retrieved October 19, 2026, from https://www.multi-line.com.ph/product/hwi-b140h/

Murakami. (n.d.). *Hikvision (HWI-B140H) 4 MP fixed bullet network camera* [Product page]. Retrieved October 23, 2026, from https://murakami.com.ph/product/hikvision-hwi-b140h/

Murat, A. A., & Kiran, M. S. (2025). A comprehensive review on YOLO versions for object detection. *Engineering Science and Technology, an International Journal, 70*, 102161. https://doi.org/10.1016/j.jestch.2025.102161

Narayana, T. L., Venkatesh, C., Kiran, A., Babu, J. C., Kumar, A., Khan, S. B., Almusharraf, A., & Quasim, M. T. (2024). *Advances in real time smart monitoring of environmental parameters using IoT and sensors*. Heliyon, 10(7), e28195. https://doi.org/10.1016/j.heliyon.2024.e28195

Nežerka, V., Zbíral, T., & Trejbal, J. (2023). Machine-learning-assisted classification of construction and demolition waste fragments using computer vision: Convolution versus extraction of selected features. *Expert Systems with Applications*. https://www.sciencedirect.com/science/article/abs/pii/S0957417423020705

Ng, C. H., Mistoh, M. A., Teo, S. H., Galassi, A., Ibrahim, A., Sipaut, C. S., Foo, J., Seay, J., Taufiq-Yap, Y. H., & Janaun, J. (2023). *Plastic waste and microplastic issues in Southeast Asia*. Frontiers in Environmental Science, 11, 1142071. https://doi.org/10.3389/fenvs.2023.1142071

Nunkhaw, M., & Miyamoto, H. (2024). An image analysis of river-floating waste materials by using deep learning techniques. Water, 16(10), 1373. https://doi.org/10.3390/w16101373

Nunkhaw, M., Chitwatkulsiri, D., & Miyamoto, H. (2025). Enhancing river waste detection with deep learning and preprocessing: A case study in the urban canals

of the Chao Phraya River. Water, 17(22), 3193. https://doi.org/10.3390/w17223193

PC Express. (n.d.). *SanDisk 64GB High Endurance microSD (SDSQQNR-064G-GN6IA) memory card* [Product page]. Retrieved October 23, 2026, from https://pcx.com.ph/products/sandisk-64gb-high-endurance-microsd-sdsqqnr-064g-gn6ia-memory-card

Pound Sterling Live. (n.d.). *U.S. dollar to Philippine peso history: 2026*. Retrieved October 23, 2026, from https://www.poundsterlinglive.com/history/USD-PHP-2026

Robles, K. P. V., & Monjardin, C. E. F. (2025, June 26). Assessment and Monitoring of Groundwater Contaminants in Heavily Urbanized Areas: A Review of Methods and Applications for Philippines. *Water*, *17*(13), 1903. https://doi.org/10.3390/w17131903

Roboflow. (n.d.). *Roboflow Annotate* [Computer software]. Retrieved October 31, 2026, from https://roboflow.com/annotate

Samolovac, J. (2026, July 10). *What is hybrid project management?* Plaky. https://plaky.com/learn/project-management/hybrid-project-management/

Shao, Z., Li, Y., Liu, B., Quan, Y., & Liang, Y. (2023). *Method and system for flood early warning in smart cities based on the Internet of Things* (US11721191B1). Google Patents. https://patents.google.com/patent/US11721191B1

Shopee. (n.d.). Shopee Philippines [Online marketplace]. Retrieved October 19, 2026, from https://shopee.ph

Te, M. C. L., Bautista, J. A. T., Dimacali, S. M. E. V., Lood, A. V. M., Pangan, M. G. M., & Chua, A. Y. (2024). *A smart IoT urban flood monitoring system using a high-performance pressure sensor with LoRaWAN*. *HighTech and Innovation Journal, 5*(4), 918–936. https://doi.org/10.28991/HIJ-2024-05-04-04

The Pi Hut. (n.d.-a). Active Cooler for Raspberry Pi 5 [Product page]. Retrieved October 19, 2026, from https://thepihut.com/products/active-cooler-for-raspberry-pi-5

The Pi Hut. (n.d.-b). Raspberry Pi 5 [Product page]. Retrieved October 19, 2026, from https://thepihut.com/products/raspberry-pi-5

Torres, J. M., Adrian, E. S., & Cook, R. C. (2024). *Flood warning system* (US12094320B2). Google Patents. https://patents.google.com/patent/US12094320B2

UNEP. (2023, May 16). *Turning off the Tap: How the world can end plastic pollution and create a circular economy*. UNEP. Retrieved March 10, 2026, from

https://www.unep.org/resources/turning-off-tap-end-plastic-pollution-create-circular-economy

United Nations. (2025). *The Sustainable Development Goals report 2025*. United Nations Statistics Division. https://unstats.un.org/sdgs/report/2025/

Victoriano, J. M., Delos Santos, M. L. C., Vinluan, A. A., & Carpio, J. T. (2022, February 12). Predicting Pollution Level Using Random Forest: A Case Study of Marilao River in Bulacan Province, Philippines. *International Journal of Computing Sciences Research*, *3*(1), 151-162. https://doi.org/10.48550/arXiv.2202.06066

Waveshare. (n.d.-a). PCIe TO 2-CH M.2 HAT+ [Product page]. Retrieved October 19, 2026, from https://www.waveshare.com/PCIe-TO-2-CH-M.2-HAT-Plus.htm

Waveshare. (n.d.-b). UPS HAT (E) [Product page]. Retrieved October 19, 2026, from https://www.waveshare.com/ups-hat-e.htm

Wikimedia Commons. (n.d.). Wikimedia Commons [Media repository]. Wikimedia Foundation. Retrieved October 20, 2026, from https://commons.wikimedia.org

World Bank. (2022, March 21). *Philippines: Plastics Circularity Opportunities Report*. World Bank Group. Retrieved March 10, 2026, from https://www.worldbank.org/en/country/philippines/publication/market-study-for-philippines-plastics-circularity-opportunities-and-barriers-report-landing-page

Wu, P., Wang, T., Wang, G., & Zhang, X. (2019, November 28). *CN110884791A - Vision Garbage Classification System and Classification Method Based on TensorFlow - Google Patents*. https://patents.google.com/patent/CN110884791A/en?q=(Ai+trash+detection)&oq=Ai+trash+detection


Yaseen, M. (2024, August 28). What is YOLOv8: An In-Depth Exploration of the Internal Features of the Next-Generation Object Detector. *arXiv*. arXiv:2408.15857v1. https://arxiv.org/html/2408.15857v1

Zeng, F., Pang, C., & Tang, H. (2024). *Sensors on Internet of Things systems for the sustainable development of smart cities: A systematic literature review*. Sensors, 24(7), 2074. https://doi.org/10.3390/s24072074

IX. APPENDICES

Appendix A

Gantt Chart

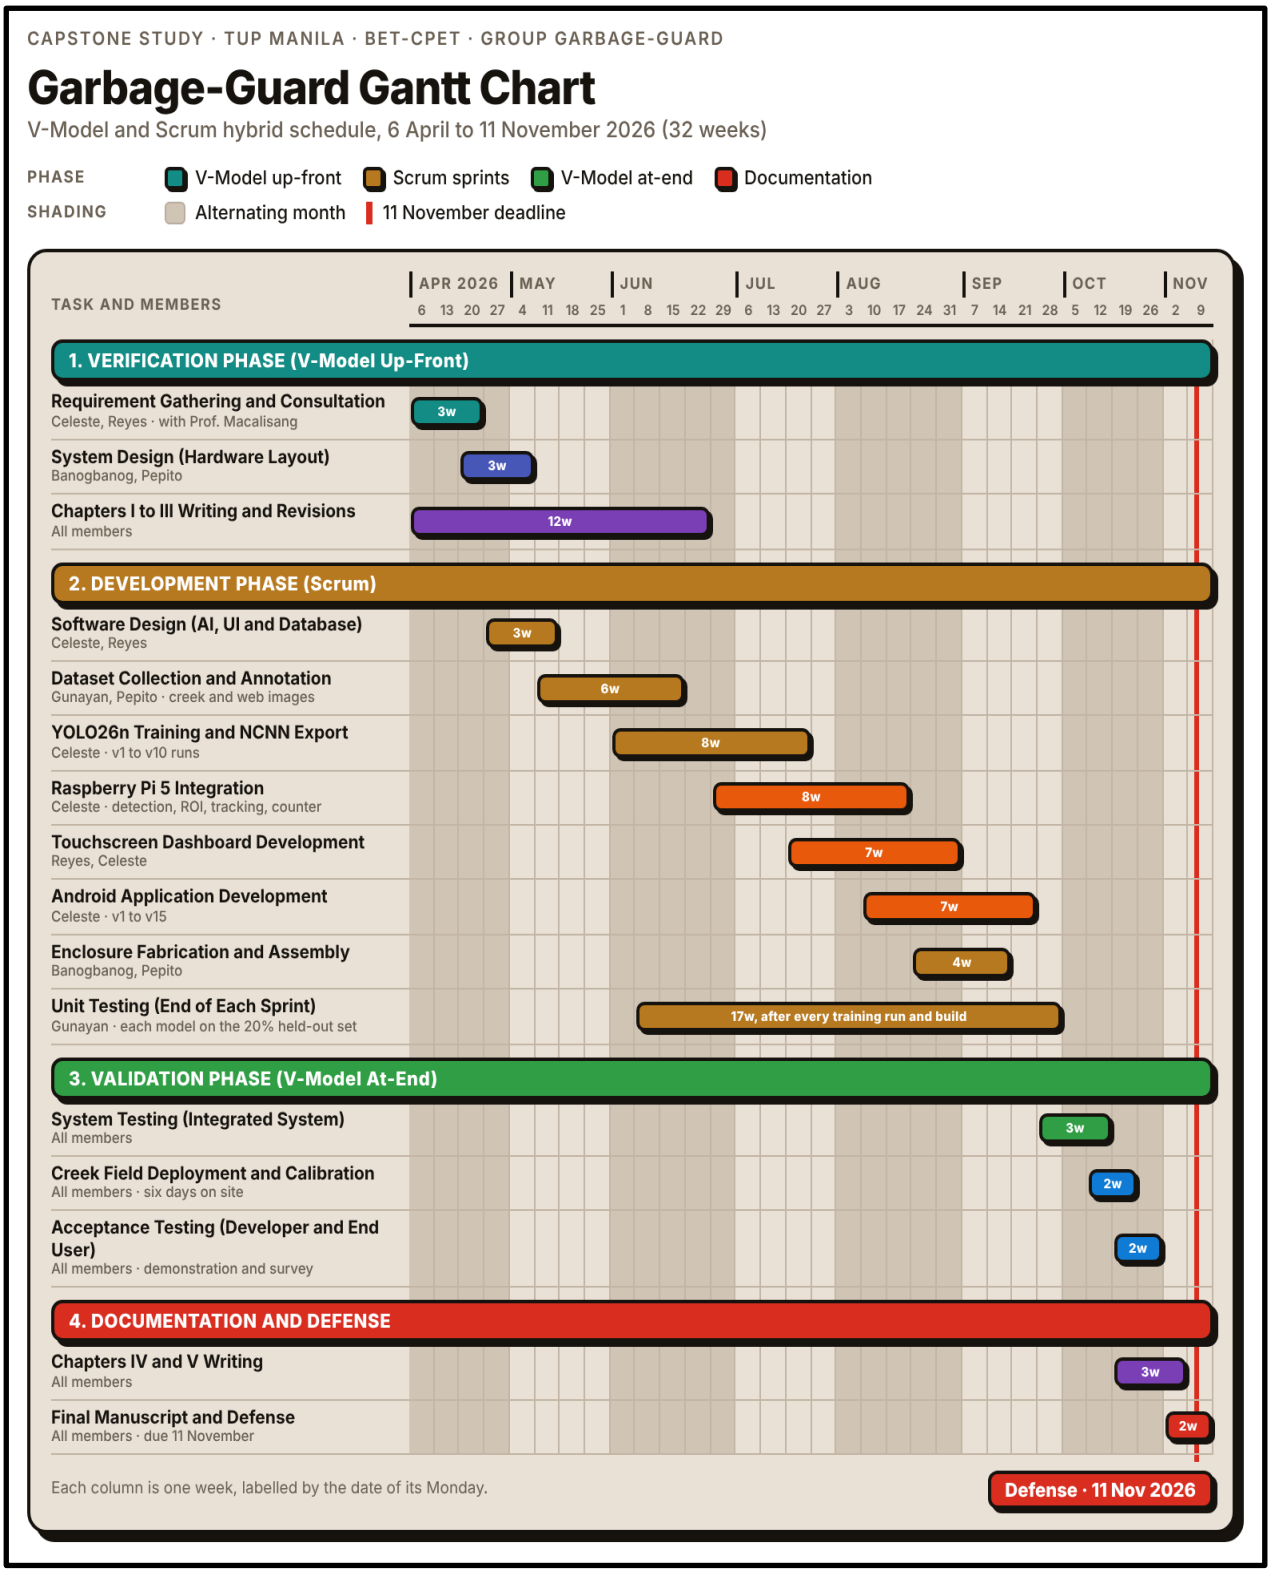

Appendix B

Bill of Materials

No.	Component	Qty	Unit Price	Amount
1	Raspberry Pi 5 single-board computer, 8GB	1	₱12,000.00	₱12,000.00
2	Raspberry Pi 5 Active Cooler (official)	1	₱600.00	₱600.00
3	Hikvision HiWatch HWI-B140H 4MP bullet network camera	1	₱3,000.00	₱3,000.00
4	Waveshare UPS HAT (E) for Raspberry Pi	1	₱2,000.00	₱2,000.00
5	21700 lithium-ion cell, 3.7V 4500mAh	4	₱200.00	₱800.00
6	USB 5V to 12V step-up cable with DC barrel jack	1	₱135.00	₱135.00
7	Erlvsoiis WF-ER1800M dual-band USB Wi-Fi adapter	1	₱489.00	₱489.00
8	Vention USB 3.0 Type A male-to-female extension cable	1	₱129.00	₱129.00
9	7-inch HDMI LCD (C), 1024 x 600 IPS, capacitive touch	1	₱2,500.00	₱2,500.00
10	Micro-HDMI to HDMI cable, 1.5m	1	₱100.00	₱100.00
11	SanDisk High Endurance 64GB microSD card	1	₱2,000.00	₱2,000.00
12	KingSpec 256GB M.2 2242 NVMe solid-state drive	1	₱3,000.00	₱3,000.00
13	Waveshare PCIe to 2-CH M.2 HAT+	1	₱2,000.00	₱2,000.00
14	Passive buzzer module	1	₱50.00	₱50.00
15	2-in-1 CAT5e UTP Ethernet and CCTV power cable, 40m	1	₱500.00	₱500.00
16	Metal waterproof junction box, 25cm x 30cm x 15cm	1	₱1,500.00	₱1,500.00
17	USB case fan	2	₱200.00	₱400.00
18	AC extension unit	1	₱500.00	₱500.00
19	Raspberry Pi 5 27W power adapter	1	₱600.00	₱600.00
			Total	₱32,303.00

Note. Prices are in Philippine pesos as listed by the online stores on October 23, 2026.

Appendix C

Testing Permit

October 21, 2026
HON. MARIA THERESA B. MEMPIN
Barangay 870
Pandacan, Manila

Subject: Request for Permission to Conduct a Field Test of the GarbageGuard Floating Trash Detection System

Dear Hon. Mempin:

Good day! We are fourth-year students of the Technological University of the Philippines-Manila, developing our capstone project, GarbageGuard: a camera-based system that detects floating solid waste in creeks and sends an alert when trash accumulates. It aims to help barangays and local offices know when a creek needs clearing before it clogs and contributes to flooding.

We respectfully request permission to conduct a short field test of our prototype along the creek in your barangay on October 21, 2026 from 1:00–3:00 pm.

We will gladly share our findings with the barangay after the test. Attached are our school endorsement and project summary. You may reach us 976-620-8735 or genesis071805@gmail.com.

Thank you very much for your time and consideration.

Respectfully yours,

Reyes, Genesis Walter D. G. Reyes

Banogbanog, Rodel S.

Celeste, Brian Jay

Gunayan, Jade C.

Pepito, King Perth G.

Noted by:

PROF. MA IAN DELOS TRINOS
Professor

DR. JONEL R. MACALISANG
Thesis Adviser

DR. TRISTAN R. MOPAS
Department Head

PROF. GHAZALI R. SISON
College Dean

Approved by:

MARIA THERESA B. MEMPIN
Barangay Chairwoman 10/22/2024

Appendix D

Deployment Permit

November 6, 2026

HON. MARIA THERESA B. MEMPIN
Punong Barangay
Barangay 870
Pandacan, Manila

Subject: Request for Permission to Conduct Pilot Deployment of Our System

Dear Hon. Mempin:

Greetings!

We are fourth-year students of Technological University of the Philippines-Manila, currently developing a system entitled **"GarbageGuard Floating Trash Detection System"** as part of our academic project.

Having successfully completed the initial testing and evaluation of our system, we would like to respectfully request permission from your office to conduct a pilot deployment within Barangay 870.

The purpose of this deployment is to evaluate the system's functionality and performance in an actual environment, gather relevant observations, and identify possible improvements before its final implementation. We believe that conducting this deployment within your barangay would provide valuable insights into the system's effectiveness and potential benefits to the community.

In connection with this request, we would also like to seek your approval and assistance regarding the following deployment requirements:

1. System Installation Location
We respectfully request permission to install the main system inside the Barangay Hall. The system will serve as the central unit for monitoring and operating the camera.

2. Camera Installation
The camera will be positioned near the creek within the barangay to monitor the designated area. A connecting wire will run from the system inside the Barangay Hall to the camera's location. We would like to request permission to route and secure the wire outside the Barangay Hall and along the necessary path toward the creek.

3. Installation and Setup Assistance
We respectfully request the cooperation of the barangay officials in identifying a suitable location for the camera and determining an appropriate and safe route for the connecting wire.

4. Proposed Deployment Schedule

We would like to request permission to conduct the installation, setup, and pilot deployment on the following dates:

- **November 6, 2026 (Friday):** 10:00 AM – 4:00 PM
- **November 7, 2026 (Saturday):** 10:00 AM – 4:00 PM
- **November 9, 2026 (Monday):** 10:00 AM – 4:00 PM

5. Permission to Conduct Pilot Deployment
We seek authorization to install, operate, and evaluate the system within the designated locations for the agreed deployment period.

We assure your office that the installation and deployment will be conducted responsibly and in coordination with the concerned barangay officials. We are also willing to discuss the installation arrangements and comply with the necessary guidelines and requirements of the barangay.

We sincerely hope for your favorable consideration of this request. Your support and cooperation would greatly contribute to the successful completion of our academic project and the further development of our system.

Thank you for your time and consideration.

Respectfully yours,

Reyes, Genesis Walter D.

Banogbanog, Rodel S.

Celeste, Brian Jay

Gunayan, Jade C.

Pepito, King Perth G.

Noted by:

PROF. MA IAN DELOS TRINOS
Professor

DR. JONEL R. MACALISANG
Thesis Adviser

DR. TRISTAN R. MOPAS
Department Head

PROF. GHAZALI R. SISON
College Dean

Approved by:

MARIA THERESA B. MEMPIN
Barangay Chairwoman 11/6/2020

Appendix E

Documentation of the Study

This appendix records the development and testing of Garbage-Guard in photographs, from the approval of the topic, through the days spent assembling the prototype, tests at creeks, the measurement of the camera cable, and the three days of deployment, with the usability survey on the first. Each figure is followed by an account of what was done at that stage and what the team learned from it.

Figure E1

Topic Approval at the Proposal Defense



Figure E1 shows the researchers and their adviser, from left to right: Genesis Walter D. Reyes II, Brian Jay Celeste, Rodel S. Banogbanog, King Perth G. Pepito, Dr. Jonel R. Macalisang, and Jade C. Gunayan at the proposal defense where the topic “Garbage-Guard: Development of Computer Vision for Creeks Garbage Detection Using Convolutional Neural Network” was approved. The title slide behind them names the study and its proponents. The approval set the direction for everything that followed: a camera-based system that detects floating garbage in a creek with a convolutional neural network. Taken on May 4, 2026.

Figure E2


First Day of Prototype Assembly



Figure E2 covers the first day of building the prototype. A rectangular metal box was chosen as the casing, and in (a) a member cuts an opening in its upper front with an angle grinder so that the touchscreen could be mounted there. Panel (b) shows the box with the opening finished. Most of the components had not arrived yet, so preparing the casing was the only work possible that day. Taken on October 3, 2026.

Figure E3

Second Day of Prototype Assembly

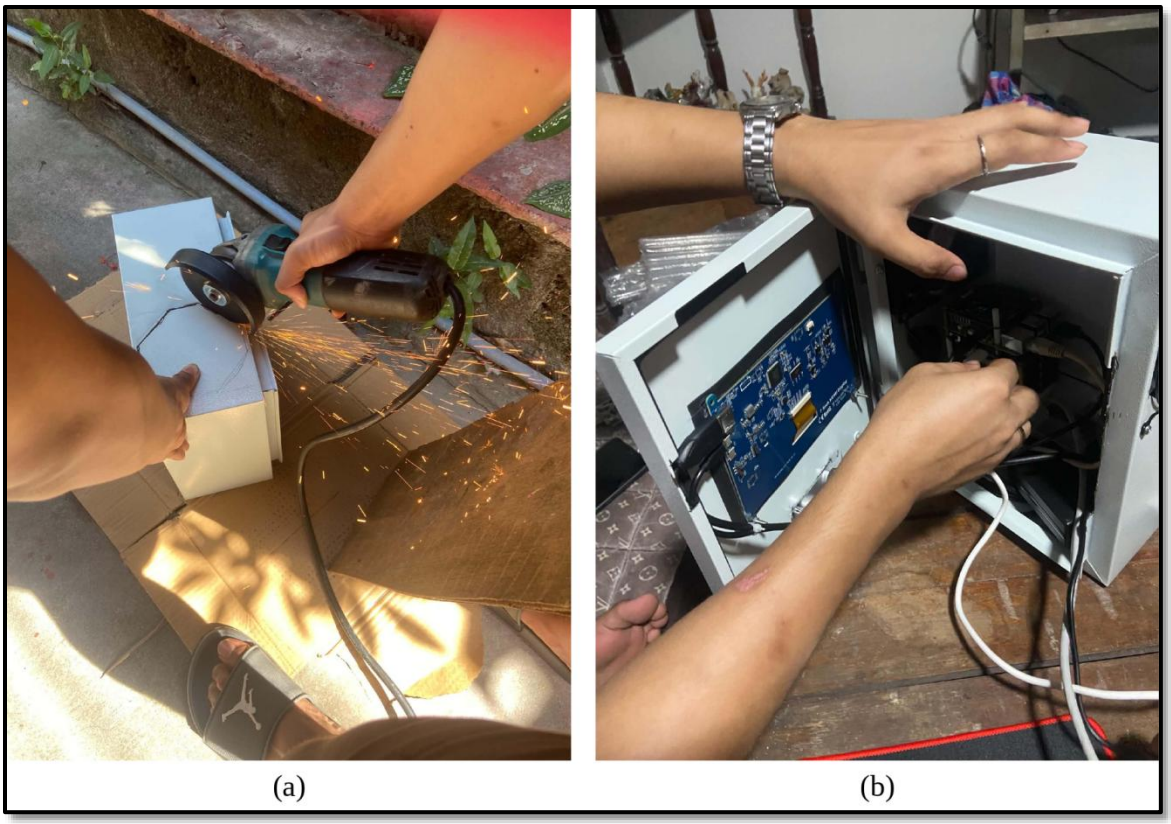

On the second day, shown in Figure E3, holes were cut in both upper sides of the box for the cooling fans, as in (a). Most of the remaining parts arrived the same day, which made it the most productive of the three: the team planned the layout, wired the components and arranged them inside the casing. Panel (b) shows the touchscreen already fitted behind the front opening while the wiring continues inside. Taken on October 9, 2026.

Figure E4

Third Day of Prototype Assembly




(a) (b)

Figure E4 shows the third day, which picked up where the second had stopped. Some of the wiring was corrected and the last components were added, as in (a), until every part sat in its place inside the casing. By the end of the day the system was complete enough for its first test, and (b) shows the assembled unit with its screen running. Taken on October 10, 2026.

Figure E5

First Independent Test for Data Gathering

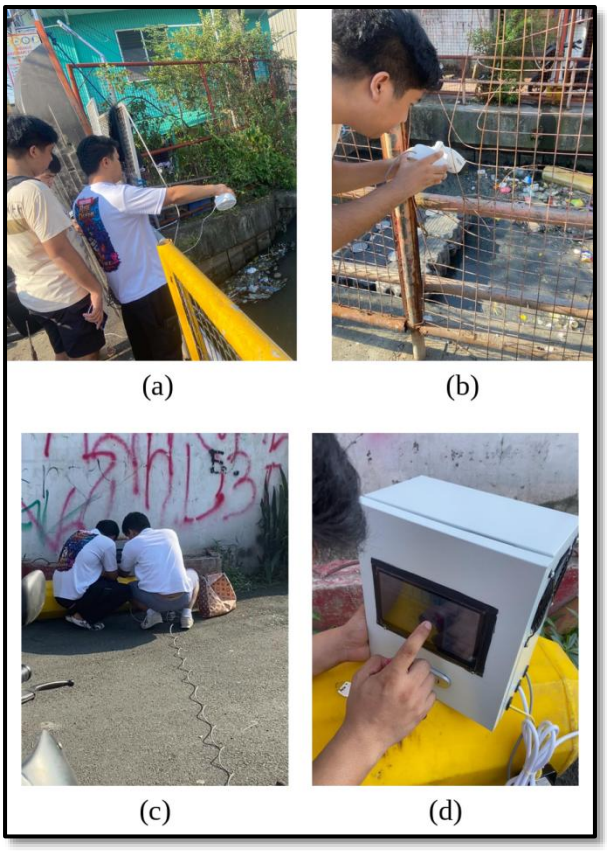

The first test, in Figure E5, was an independent run at another creek, held to see how the system performed and to gather pictures for annotation; (a) to (d) show the team at the creek and the unit being set up and operated there. The system had trouble detecting garbage once the items were some distance from the camera, and the confidence of its detections was low. The team answered this with new training data from the creek itself: creek waste was recorded with the system's own CCTV camera, annotated by class and used to retrain the model. Taken on October 14, 2026.

Figure E6

Researchers with the Barangay Officials



Figure E6 shows the researchers with barangay officials on the day of the permitted test at a creek in Barangay 870, Pandacan, Manila. The barangay granted the testing permit in Appendix C, and its personnel are the people the system is built for, since Garbage-Guard is meant to tell them when a stretch of creek needs clearing. Taken on October 21, 2026.

Figure E7

Field Test at Barangay 870, Pandacan, Manila


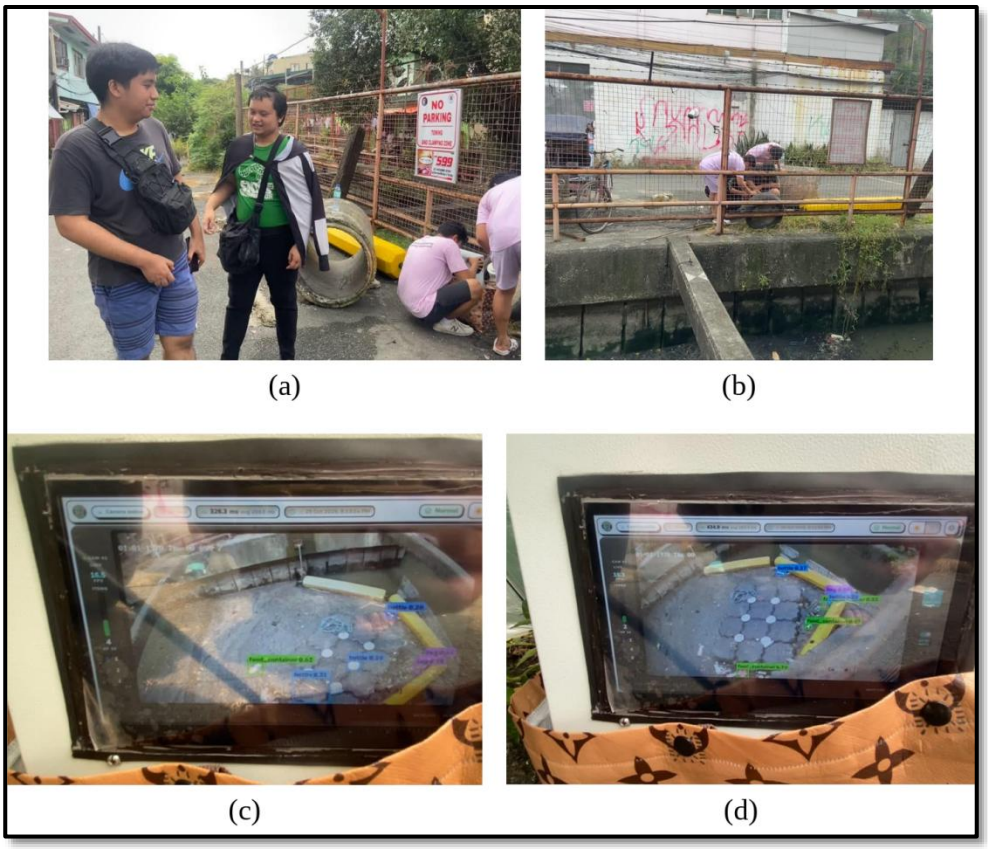


Figure E7 shows the second test, held at a creek in Barangay 870, Pandacan, Manila, under the permit in Appendix C. The retrained model now detected the garbage in the creek and labelled each item with the class it had been annotated with, as the screens in (c) and (d) show. Confidence was still low, however, and detection still needed work. Two changes followed. The model was trained again with the annotation focused on creek images, and the settings of the CCTV camera were changed to give a better picture. Taken on October 21, 2026.

Figure E8

Second Independent Test and First Accumulation Alert

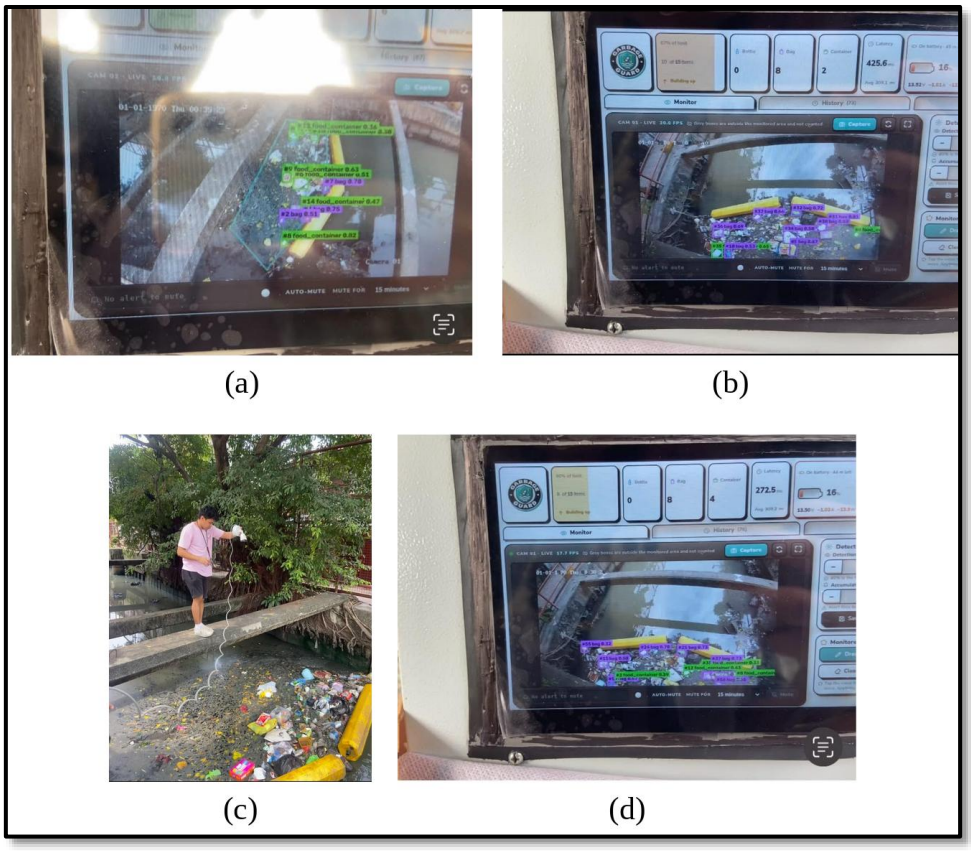

The third run, shown in Figure E8, was again an independent test at another creek to gather pictures, and detection improved markedly. The model found the garbage according to the annotated classes, and for the first time the count reached the configured threshold of 20 and set off the alarm. Panels (a), (b) and (d) show the touchscreen dashboard during the test and (c) a member at the creek. Some problems remained, but they were manageable. The next steps were to annotate more images and to raise the confidence of the detections. Taken on October 27, 2026.

Figure E9

Third Independent Test and Image Collection for Model v10

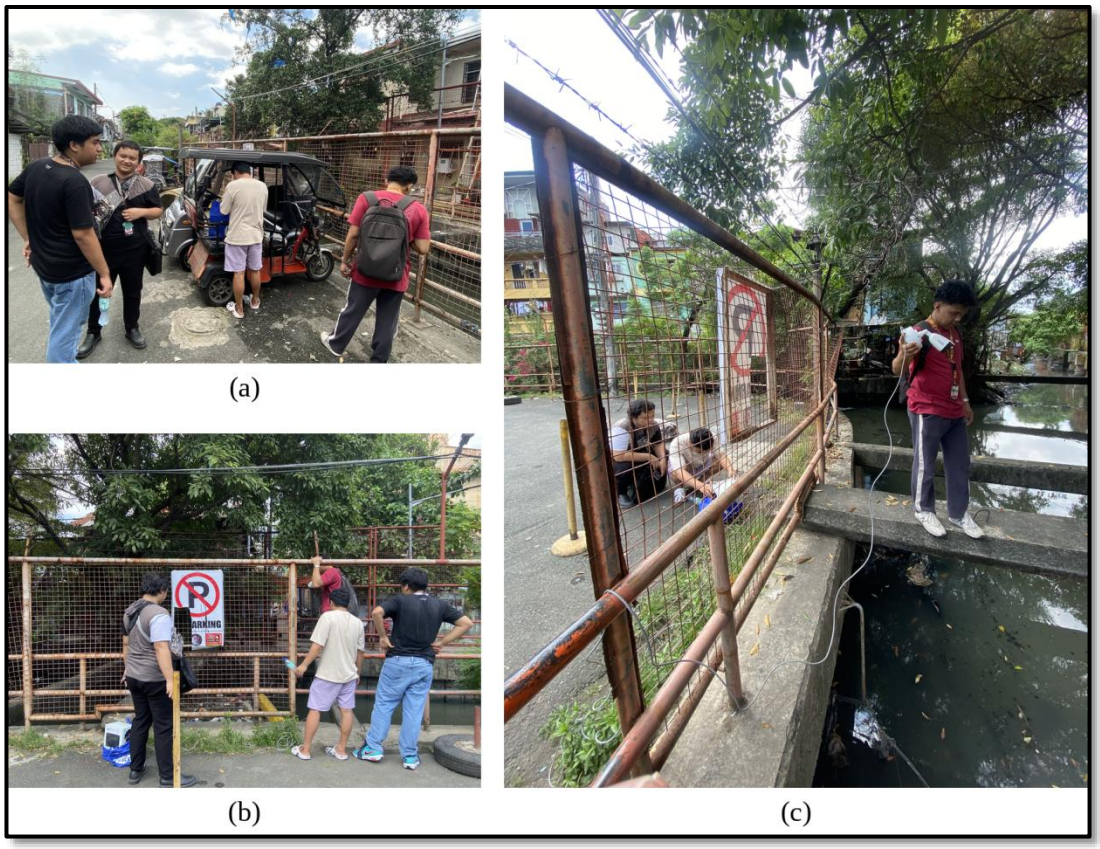


Figure E9 shows the fourth run, an independent test held back at the creek in Barangay 870, Pandacan, Manila. Panel (a) shows the team arriving at the bridge, (b) the team at the railing setting up, and (c) a member on the ledge beside the bridge holding the camera over the water while two others work at the railing. The session was also used to take new pictures of the creek, to be annotated for model v10. Taken on November 4, 2026.

Figure E10

Measuring the Camera Cable from the Barangay Building to the Bridge



Figure E10 shows the camera cable being measured on the same day, from the barangay building to the bridge where the camera is to be mounted. Panels (a) and (b) show the cable laid out along the street. The 40m 2-in-1 Ethernet and power cable covered the distance with about 15m left over, so one cable is enough to link the unit in the barangay building to the camera on the bridge. Taken on November 4, 2026.

Figure E11

First Day of Deployment Test

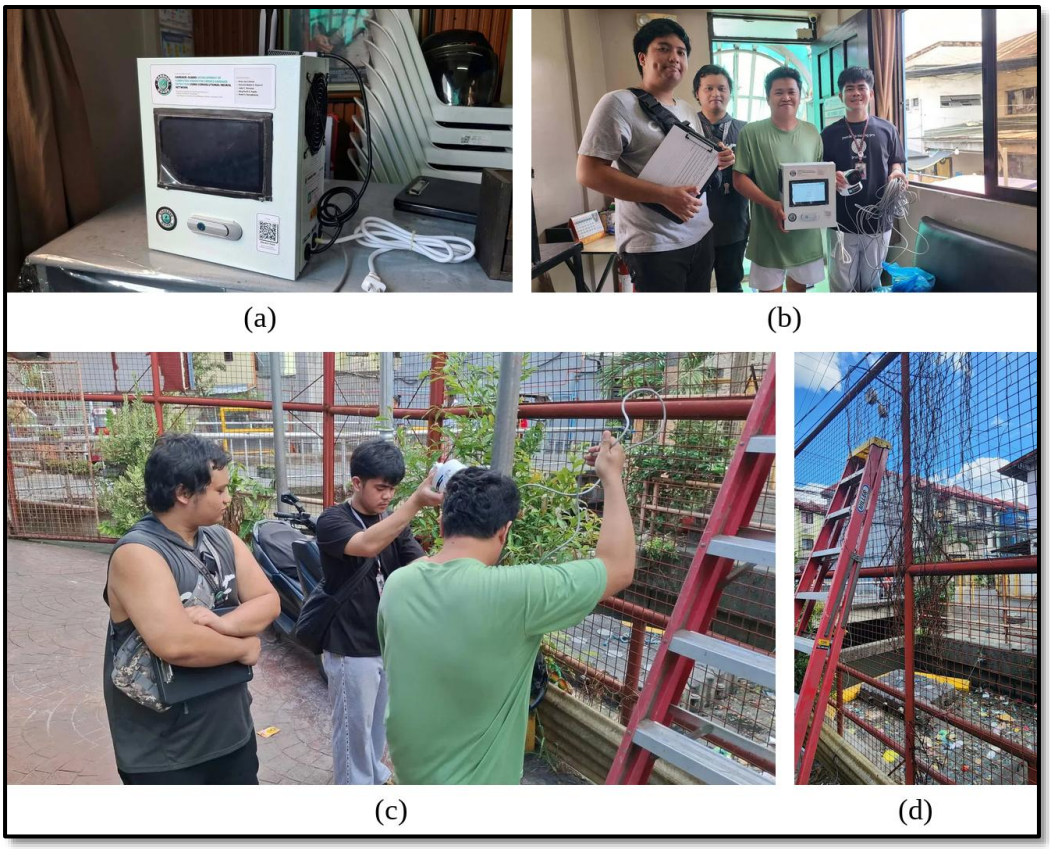


Figure E11 shows the first day of the deployment test at the barangay. Panel (a) shows the prototype set up on a table, with its touchscreen, case fan and power cord, and panel (b) shows the researchers with the unit, the camera and a coil of network cable before the installation began. Panels (c) and (d) show the camera being set up on the fence beside the creek, at a spot 13ft above the water. A ladder was used to reach the mounting point, and in (d) the trash floating in the creek can be seen from where the camera sits. Taken on November 6, 2026.

Figure E12

Usability Survey with the Barangay Personnel and the Estero Rangers



Figure E12 shows the usability survey held on the first day of the deployment test with the barangay personnel, the Estero Rangers and the barangay secretary. Each of them used the touchscreen and the Android application at the unit and then filled in the Usability Survey Form in Appendix F; their ratings and comments are in Appendix G. Panel (a) shows the researchers at the unit on the desk in the barangay hall while a respondent looks on. Panel (b) shows a member following the live camera feed on the phone application beside the touchscreen, while the researchers and the respondents gather around the unit and one of them holds the survey form. Taken on November 6, 2026.

Figure E13

Second Day of Deployment Test



Figure E13 shows the second day of the deployment test at the barangay. The camera was lowered from about 13ft to about 9ft above the water on this day, after the first day's count showed that the dashboard counted only 21 to 31% of the items counted by eye. Panel (a) shows two members crouched together under a red umbrella on the road beside the fence, a member standing with a tablet and the camera on the fence behind them. Panel (b) shows a member adjusting the camera on the fence rail at its new height. With the camera at about 9ft the dashboard counted 40 to 50% of the items counted by eye (Table 17), and live classification rose from 62.5% to 73.5% (TC_ACC_01). Taken on November 7, 2026.

Figure E14

Third Day of Deployment Test



Figure E14 shows the third day of the deployment test at the barangay. The camera was lowered again, to about 7ft above the water. Panel (a) shows one member standing on the concrete base beside the lamp post and reaching over the fence rail, while another sits on the road beside the unit, which rests on a tyre, with papers and a cable next to it. Panel (b) shows the camera fixed to the fence rail and aimed at the creek, with the floating trash below it and the cable that leaves the camera. With the camera at about 7ft the dashboard counted 49 to 54% of the items counted by eye (Table 17), and live classification reached 85.0%, the only day above the 80% target (TC_ACC_01). Taken on November 9, 2026.

Appendix F

Usability Survey Form

Usability Survey Form

For barangay personnel, after they have used the touchscreen and the phone app. One sheet per person.

Name (optional): _____ Position: _____ Date: _____

Encircle one number for each statement: 5 Strongly Agree, 4 Agree, 3 Neutral, 2 Disagree, 1 Strongly Disagree

Code	Statement	Rating
USR-U1	Information displayed on the monitor is easy to read and understand.	5 4 3 2 1
USR-U2	Visual bounding boxes on the camera feed clearly showed where the garbage is located on the creek.	5 4 3 2 1
USR-U3	The Accumulation Alert is clear, noticeable and effectively informs when the creek needs cleaning.	5 4 3 2 1
USR-U4	The system provides helpful insights that would assist local authorities in monitoring creek pollution.	5 4 3 2 1
USR-U5	The Android application shows the alerts and the history clearly, and what it shows matches the touchscreen.	5 4 3 2 1

Comments or suggestions:

_____

_____

_____

_____

_____

Appendix G

End-User Usability Survey Responses

This appendix lists the ratings and comments of the four end users who answered the Usability Survey Form in Appendix F on November 6, 2026. Their weighted means are the ones reported in Table 20 of Chapter IV.

Table G1

Ratings and Comments of the Respondents in the End-User Usability Survey

Respondent	Position	U1	U2	U3	U4	U5	Comment
Marlon Ocampo	Estero Ranger	5	4	4	5	4	ANG SYSTEM AY MAGANDA AT MALAKING TULONG PARA SA BARANGAY AT LALO NA SA AMING ESTERO RANGERS PARA SA PAGMONITOR NG ILOG AT WATERWAYS.
Joey L. Garcia	Barangay Kagawad	4	4	5	5	4	SANA MAGING SUCCESSFUL ANG EXPERIMENT NA ITO PARA MAKATULONG SA ATING KALIKASAN.
Anelyn D. Layco	Barangay Secretary	5	4	3	4	4	Ok naman yung device, suggestion lang na mas dagdagan pa yung na didetect na basura, bukod sa plastic bags, bottles and container. Para mas mabilis na pag lilinis din sa ating estero.
Divine Grace De Leon	Estero Ranger	4	5	5	5	5	MAGANDA ANG PORPOSE NG SYSTEM OR CAMERA PARA SA ESTERO SA AMING BRGY, MAKAKATULONG SA PAGBILIS NG PAGLINIS AT PAGSASAGAWA NG MGA BASURANG NASA ILOG.
Weighted mean		4.50	4.25	4.25	4.75	4.25	Overall: 4.40

Note. N = 4. U1 to U5 are the statements USR-U1 to USR-U5 of Table 8, each rated on the five-point scale of Table 9 (5 = Strongly Agree, 1 = Strongly Disagree). Comments are given as the respondents wrote them, in Filipino. The survey was answered on November 6, 2026.

Appendix H

User Interface of the System

This appendix presents the user interface of Garbage-Guard: the web dashboard that the Raspberry Pi 5 serves to its own touchscreen and to browsers on the same network, and the Android mobile application. The screens were captured from the current versions of both programs connected to the project's mock server, which serves the same interface as the Pi with test data. For this reason, the camera area shows a test picture in place of the creek.

Figure H1

Web Dashboard Monitor Tab

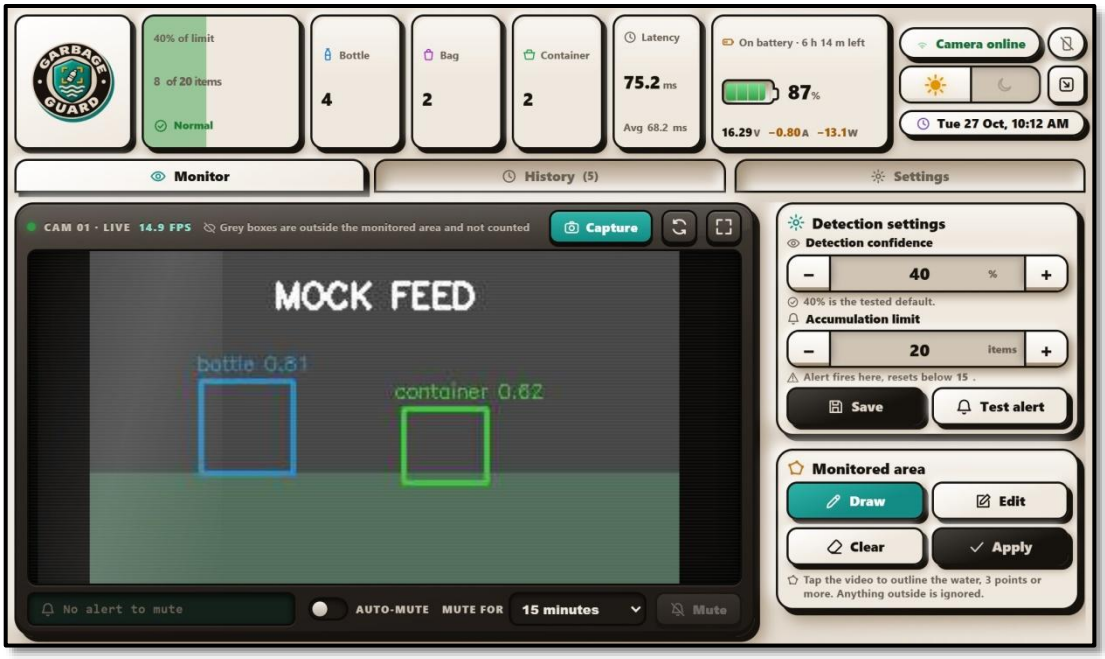


Figure H1 shows the web dashboard's Monitor tab as displayed on the 7-inch touchscreen of the Raspberry Pi 5. The top strip shows the level of accumulation, the number of each garbage class in the monitored area, inference latency, UPS battery status, the camera link and the clock. The live feed draws a box with a confidence score around each item, and the boxes vary in shape and size with the items. The right panel shows the

confidence threshold, the level of accumulation, and controls to limit the monitored area. It also provides controls to enable and disable alerting and muting.

Figure H2

Web Dashboard During an Accumulation Alert

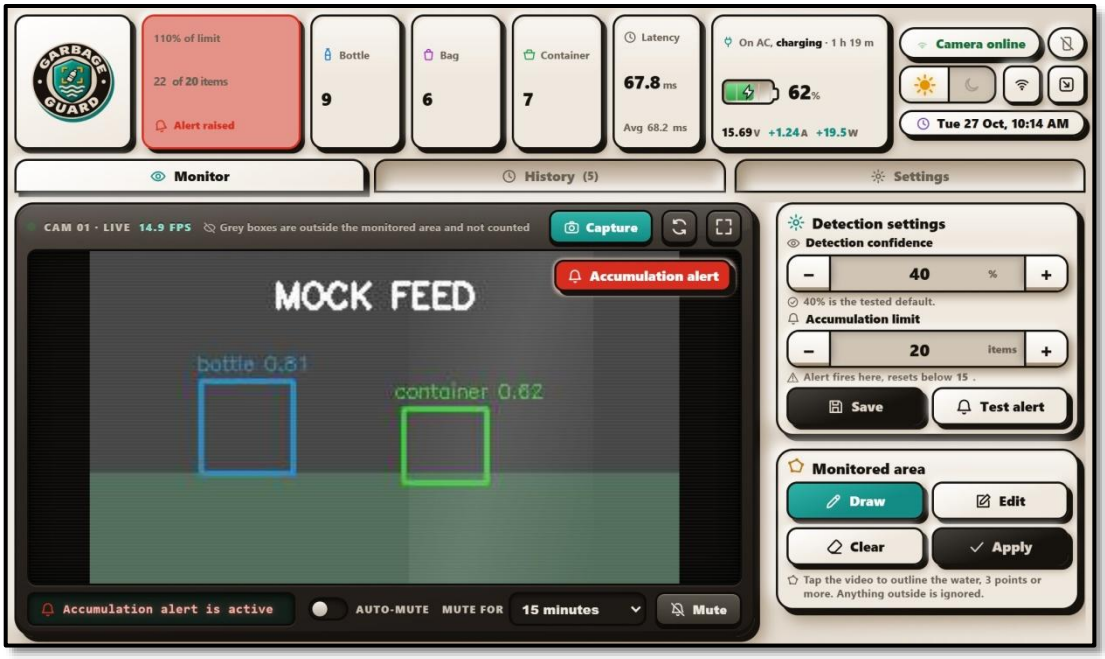


Figure H2 shows an active accumulation alert. The level box is red and states, “Alert raised.” The feed shows an Accumulation Alert tag. The mute bar states the alert is active and can be turned off for a time by the operator. The alert is cleared automatically when the smoothed count is reduced to the re-arm level.

Figure H3

Drawing the Monitored Area on the Web Dashboard

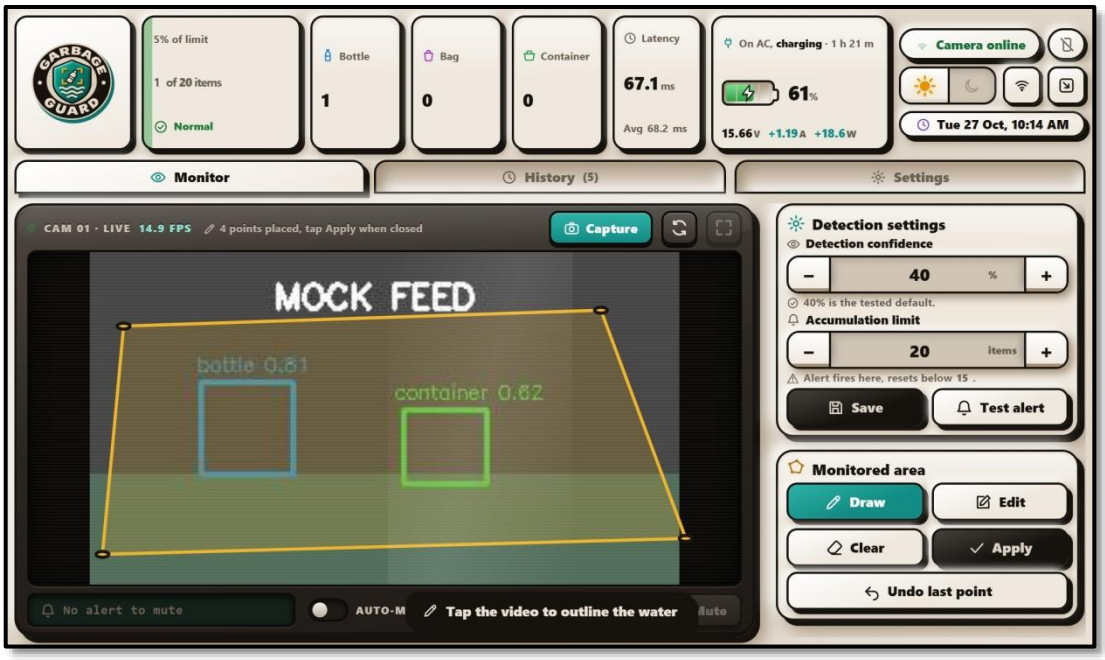


Figure H3 shows the monitored area being drawn. The operator taps the video to place the corners of a polygon over the water, and only items whose center falls inside it are counted, while detections outside it are drawn as thin grey boxes. The area is saved with Apply and can be edited, cleared or undone one point at a time. The area can also be drawn from the fullscreen view shown in Figure H4.

Figure H4

Web Dashboard Fullscreen View

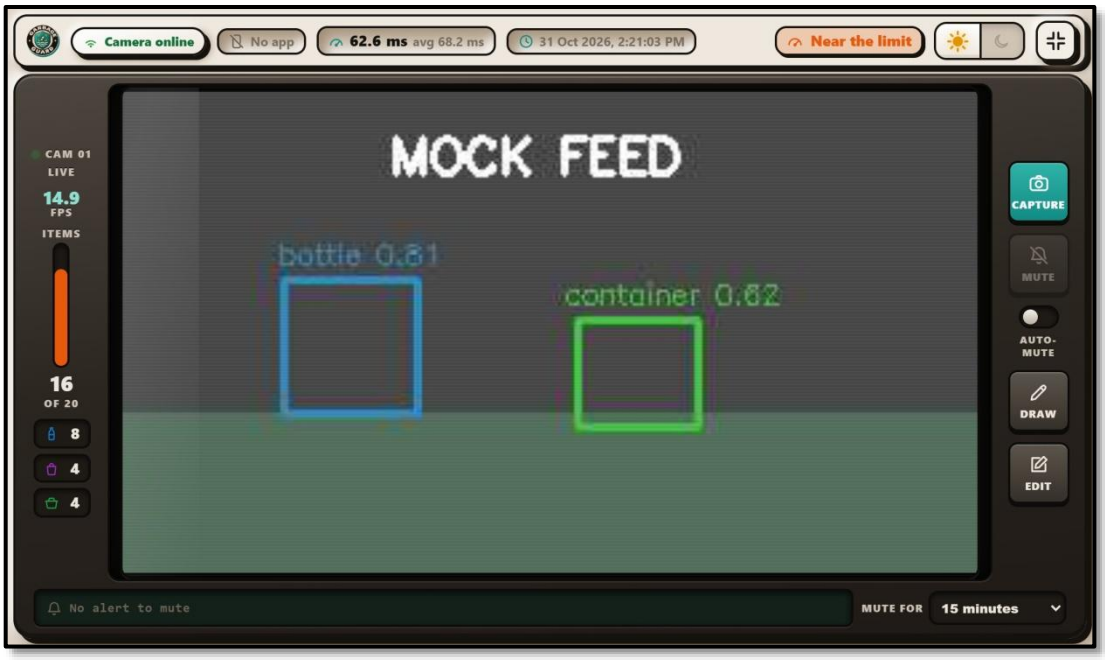


Figure H4 shows the Fullscreen view, which makes the camera picture occupy most of the screen. The side columns keep the item count against the limit, the count per class, the frame rate and the latency, together with the capture, mute and auto-mute keys. The Draw and Edit keys on the right let the operator outline the monitored area without leaving Fullscreen. While drawing, these keys change to Cancel, Undo, Clear and Apply, and a strip across the top of the picture counts the points placed. Two fingers pinch to zoom into the picture and drag to pan it, a Reset zoom key returns to the whole frame, and one finger still places the points of the area. Full-size snapshots opened from the history zoom the same way.

Figure H5

Web Dashboard in Dark Mode

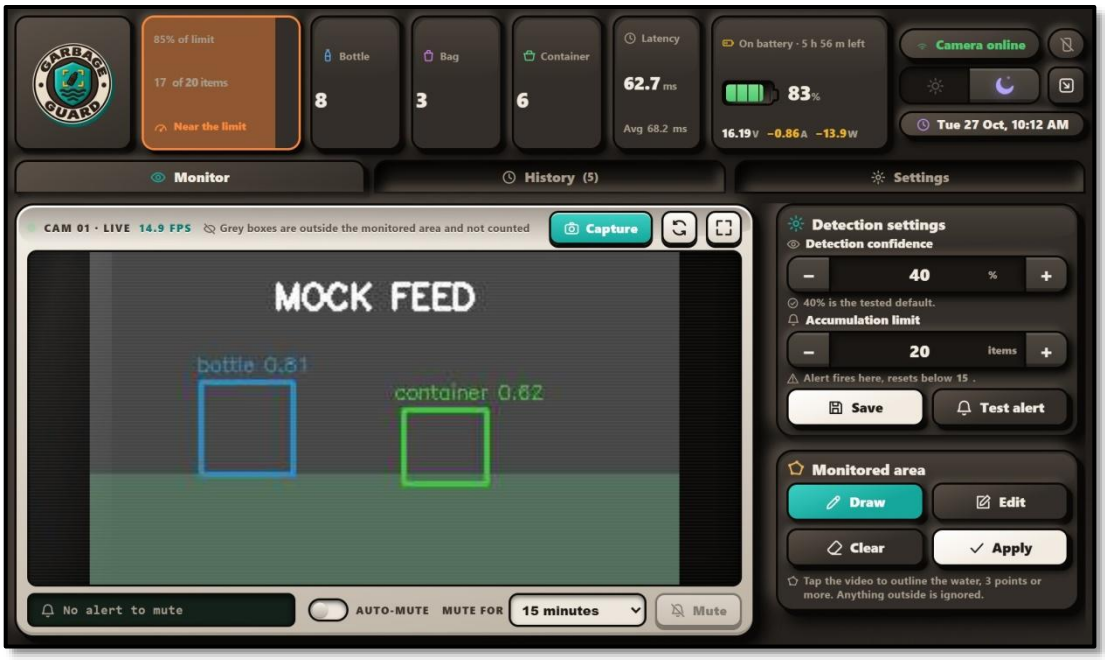


Figure H5 shows the dashboard in dark mode, which is selectable via the sun and moon switch in the top right corner of the screen. Every page follows the theme choice, which makes the touchscreen easier to read in dark mode.

Figure H6

Web Dashboard History Tab

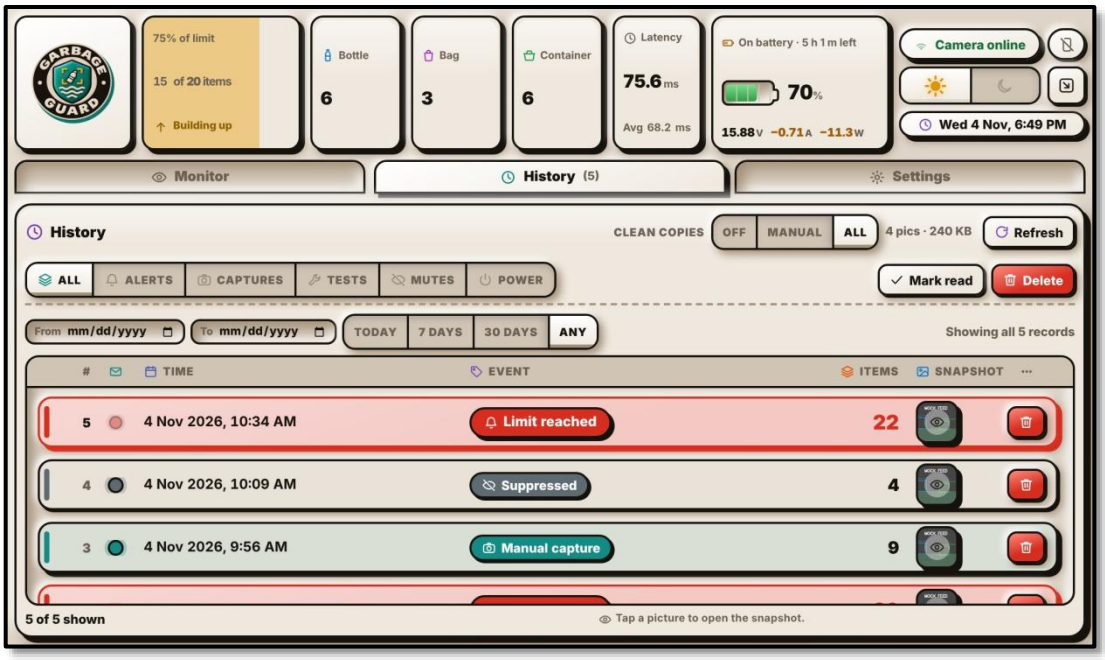


Figure H6 shows the History tab, which lists all events stored in the SQLite database on the Pi. Events include accumulation alerts, spikes, manual captures, test alerts, mutes and power events. Each row carries a record number, counted down from the newest, and a square thumbnail of its snapshot with an eye mark; tapping the thumbnail opens the snapshot. Older rows load as the list is scrolled, so the whole history is reached without changing pages. Events can be filtered by type and by a date range, marked as read and deleted. The Clean copies switch determines whether or not an unannotated copy of each snapshot is kept.

Figure H7

Snapshot Viewer on the Web Dashboard

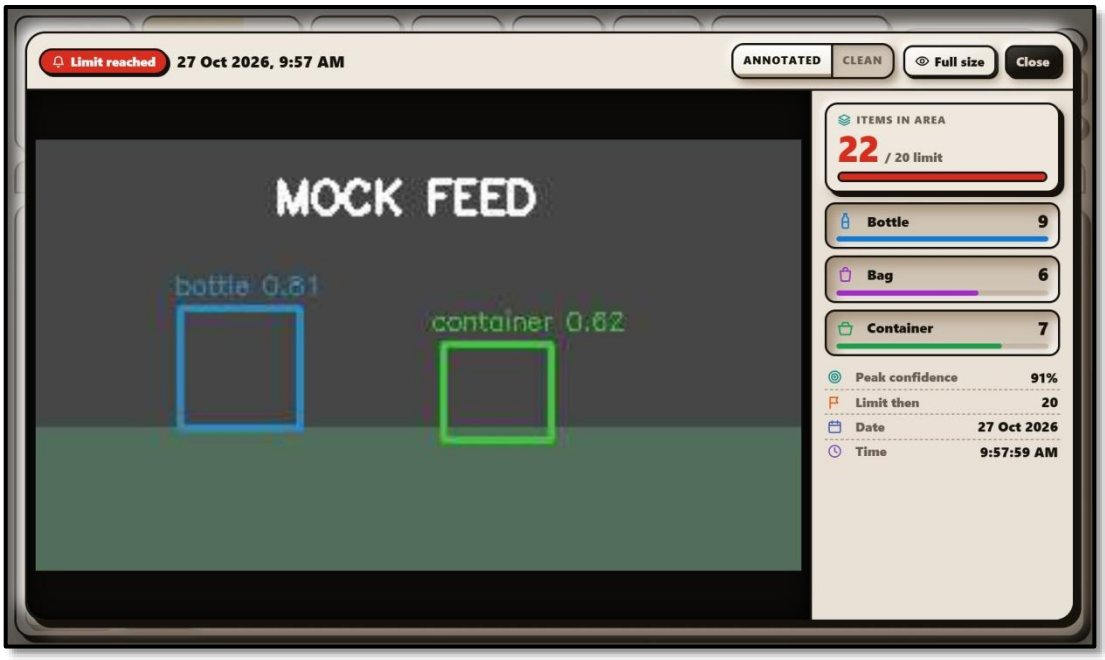


Figure H7 shows a snapshot opened from the history. The saved frame appears on the left, either annotated or as the clean copy, and the panel on the right lists the number of items in the area against the limit, the count per class, the peak confidence, and the date and time of the event.

Figure H8

Delete Confirmation on the Web Dashboard



Figure H8 shows the alert and snapshot removal confirmation. This keeps a user from deleting a record with an accidental tap.

Figure H9

Web Dashboard Settings Tab

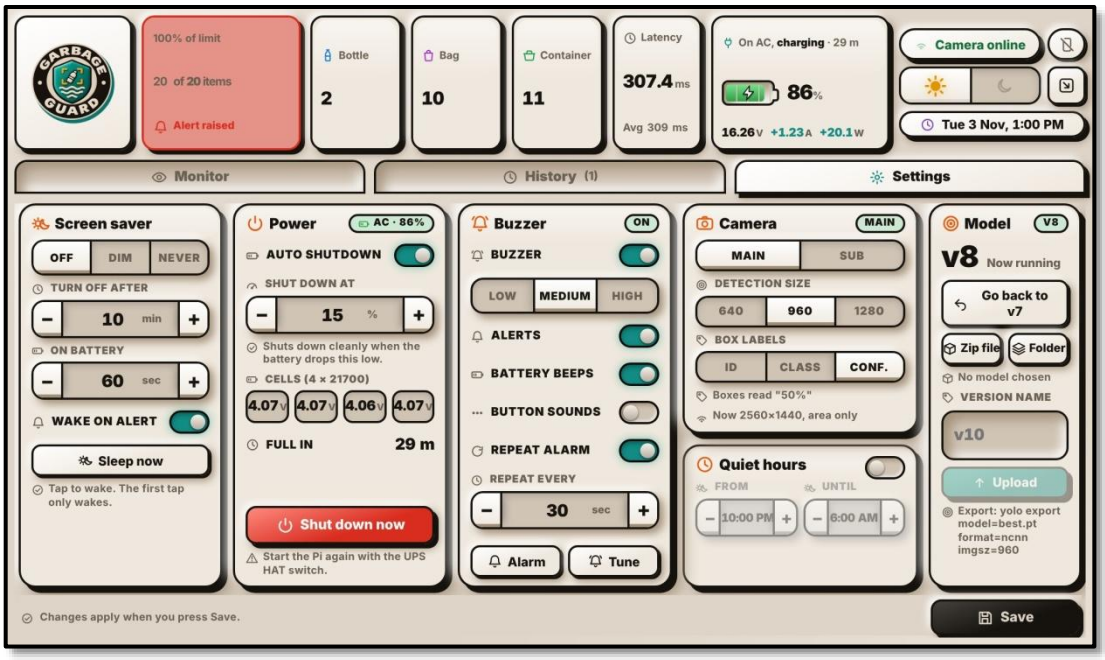


Figure H9 shows the Settings tab, laid out in five columns on the touchscreen. The Screen saver setting determines when the touchscreen turns off or dims. Power sets the battery shutdown level and shows the voltage of each battery cell. The Buzzer setting determines the volume and the events that sound. The Camera card selects the camera stream and the detection size, and its Box labels row chooses what is written beside each detection box: the track ID, the class name, the confidence, or any mix of the three. With only the confidence selected, a box reads “50%.” Quiet hours, a time window during which the buzzer is disabled, sit below the Camera card, with the times shown greyed out while the setting is off. The Model card shows the model that is running, goes back to the previous one with a single button, and installs a new one from a zip file or a folder under a version name.

Figure H10

Battery Details on the Web Dashboard

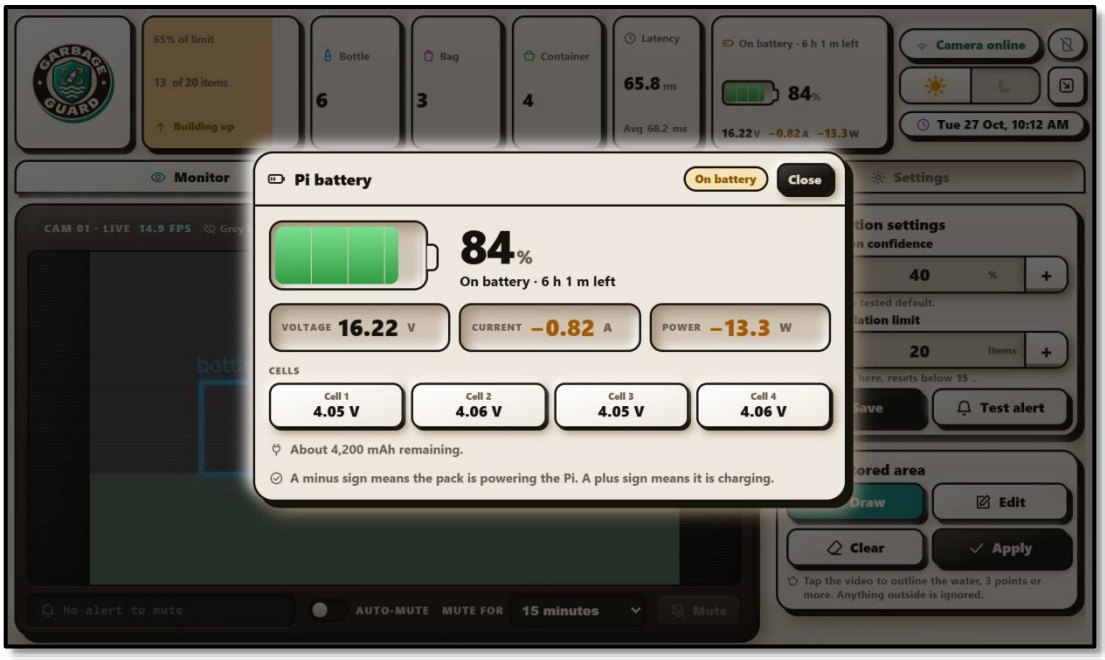


Figure H10 shows the battery details opened from the battery box. It reports the charge, the voltage, current and power of the UPS HAT, the voltage of each of the four cells and the estimated remaining capacity. A minus sign means the pack is powering the Pi, and a plus sign means it is charging.

Figure H11

Connected Phones Panel on the Web Dashboard

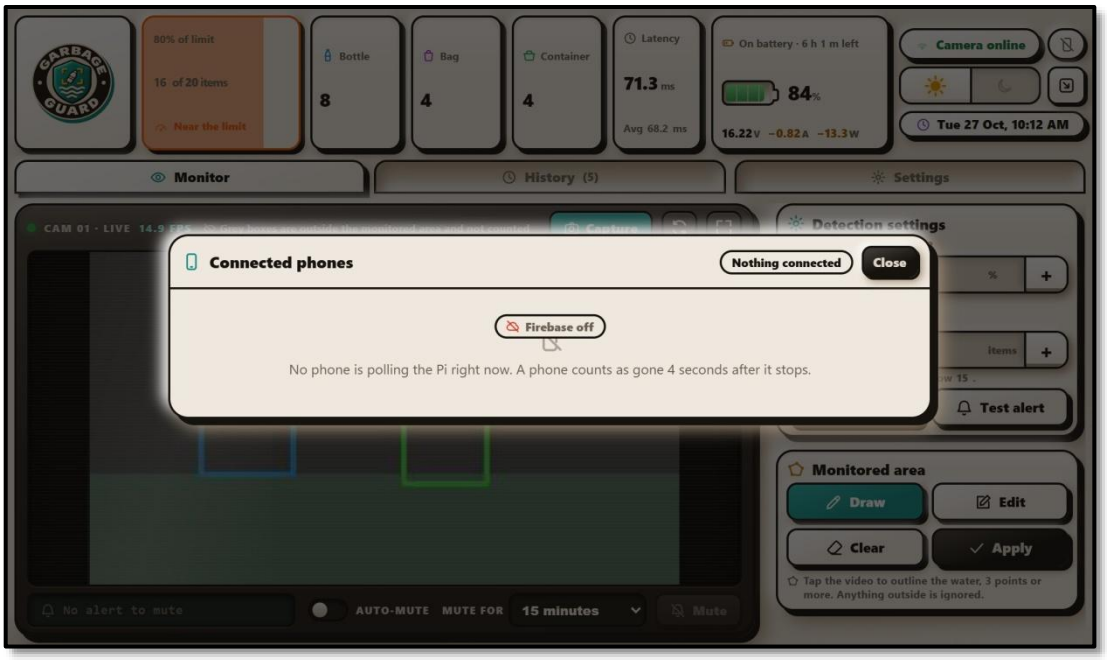


Figure H11 shows the Connected phones panel, which lists the phones that are polling the Pi and whether Firebase sync is on. No phone was connected when this screen was captured.

Figure H12

Network Setup Page of the Raspberry Pi


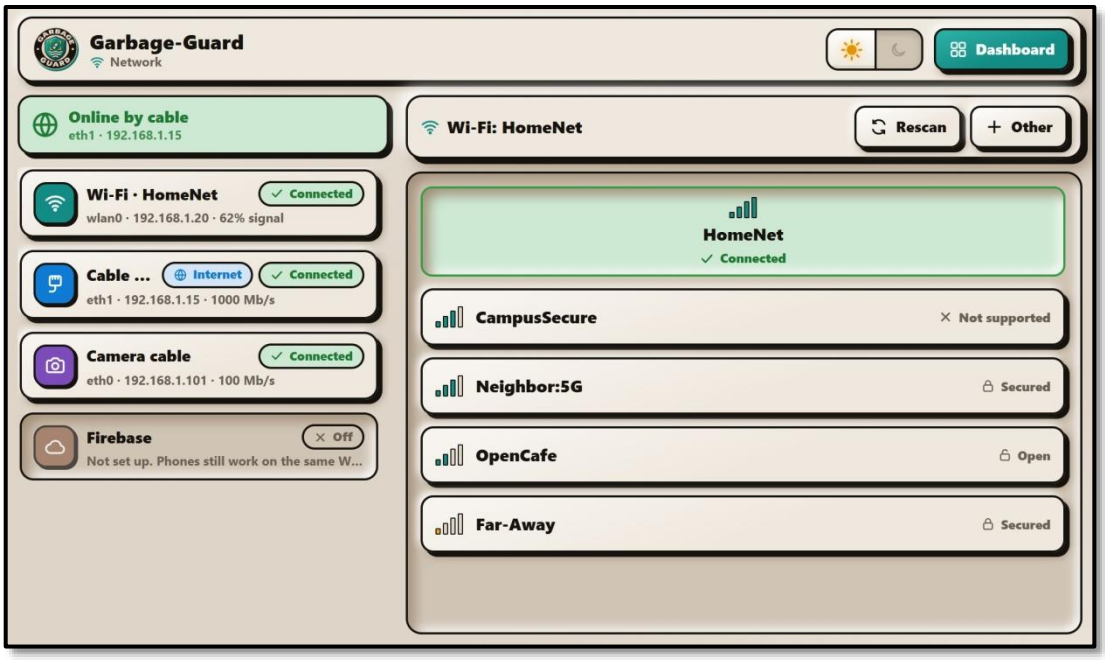


Figure H12 shows the network page used to set up the connection of the Pi. The left column shows the state of the Wi-Fi, the cable link to the internet, the camera cable and Firebase, and the right column lists the Wi-Fi networks in range. Wi-Fi and address settings can only be changed from the Pi's own touchscreen; other devices see the page as view only.

Figure H13

Mobile App Connection Screens

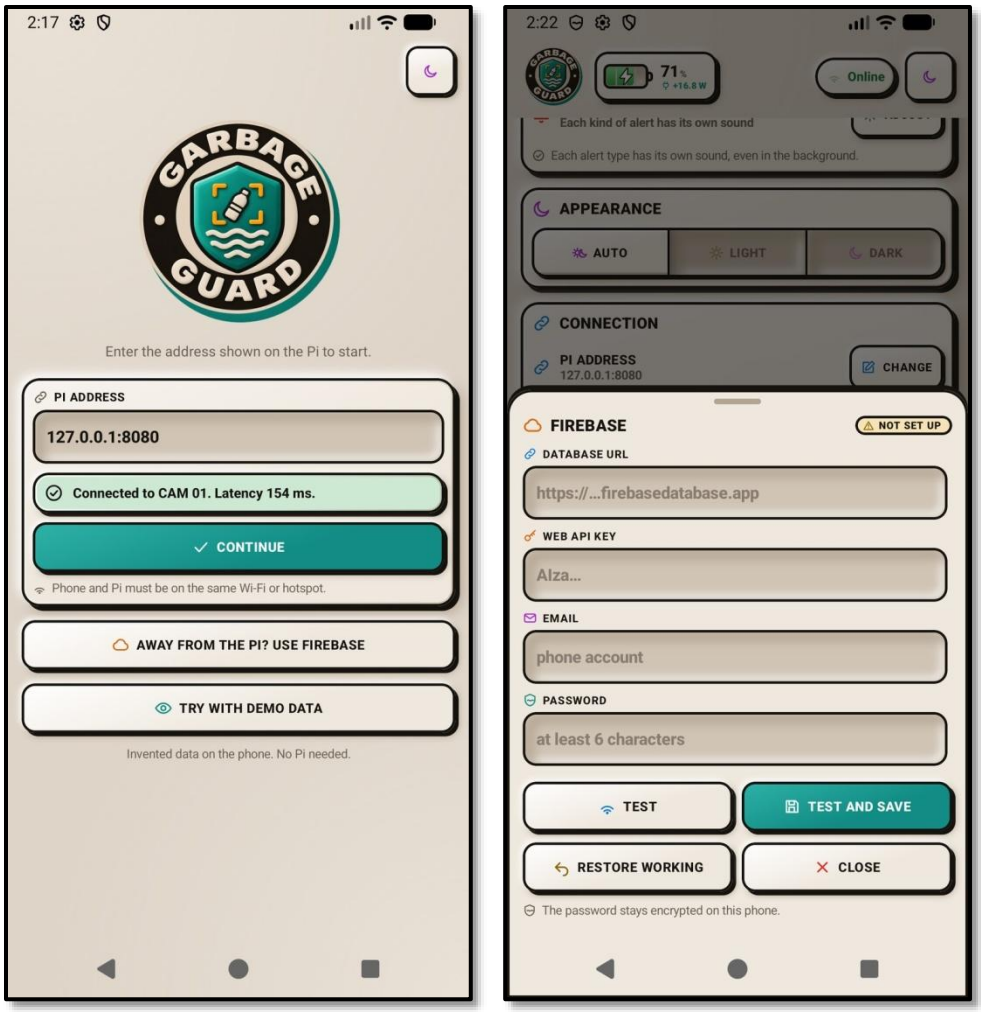


(a) (b)

Figure H13 shows the first screens of the mobile application. In (a) the user enters the address shown on the Pi and taps Test connection; once the Pi answers with its camera name and latency, Continue opens the app. The same screen offers a demo mode with invented data. In (b) the user enters the Firebase database address, web API key and account so the app can still receive alerts and still pictures when the phone is away from the Pi's network.

Figure H14

Mobile App Monitor Screen

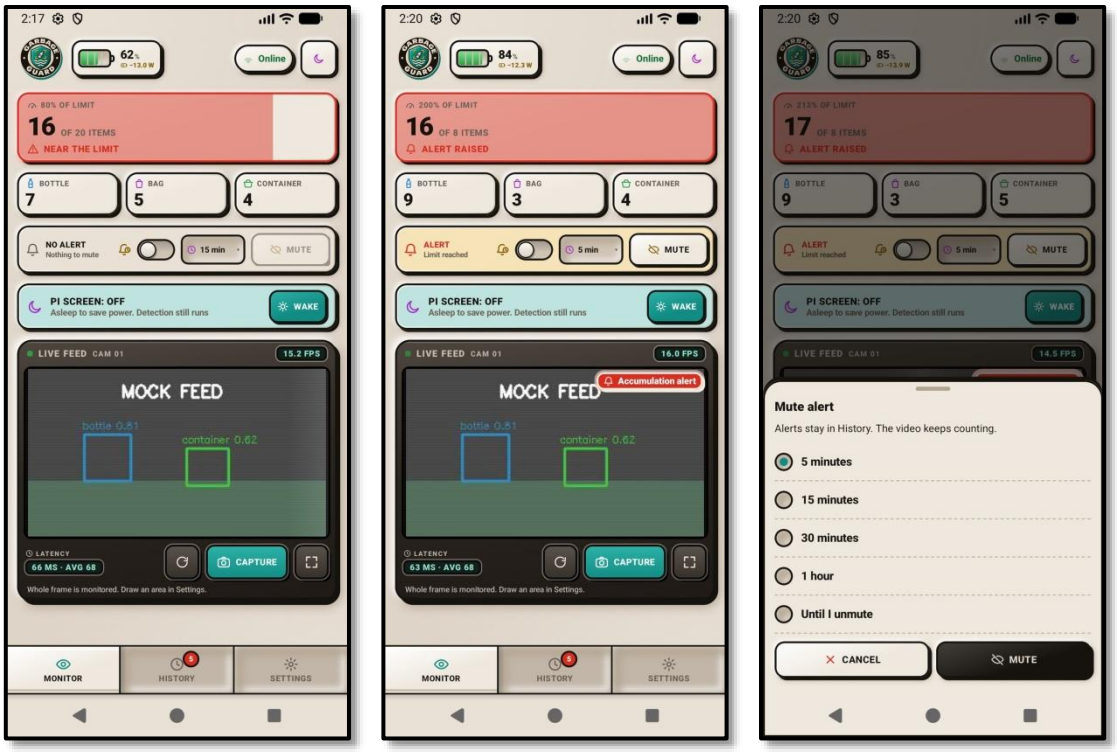

(a) (b) (c)

Figure H14 shows the Monitor screen of the app. In (a) the count is near the limit, so the level card turns red as a warning before an alert is raised. In (b) an accumulation alert is active: the card reads Alert raised, the feed carries the alert tag and the Mute key becomes available. In (c) the user picks how long to mute the alert, from five minutes up to indefinitely, until the user unmutes it. The card below the counts shows whether the Pi's own screen is asleep and lets the user wake it.

Figure H15

Mobile App Fullscreen View


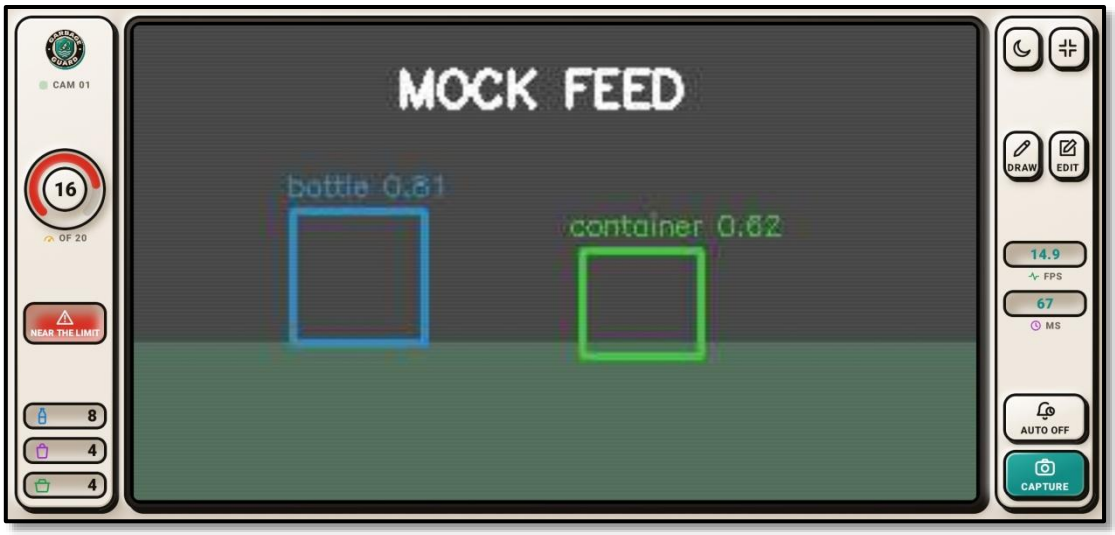


Figure H15 shows the app in Fullscreen, which turns the phone sideways and gives the camera picture the whole display. The count against the limit, the count per class, the frame rate, the latency, and the auto-mute and capture keys stay on the sides. The Draw and Edit keys on the right panel open the same drawing mode used in Settings, and Cancel or Apply returns the user to the Fullscreen feed. As on the dashboard, a two-finger pinch zooms and pans the picture and Reset zoom returns to the whole frame.

Figure H16

Mobile App History Screen

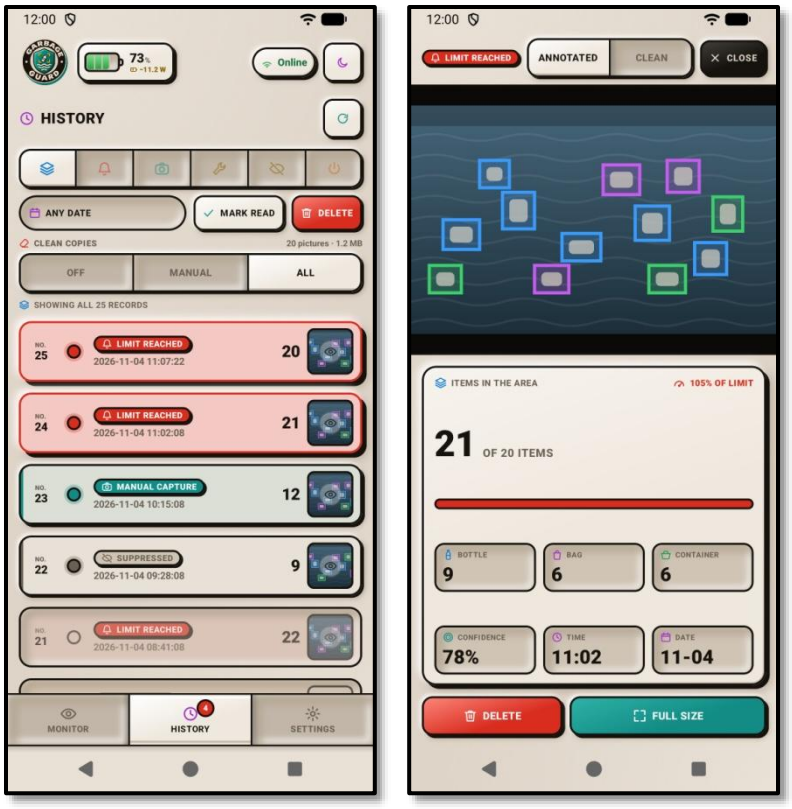


(a) (b)

Figure H16 shows the History screen. In (a) each event carries a record number, counted down from the newest, with its type, time and item count and a snapshot thumbnail with an eye mark; the list can be filtered, marked as read or deleted. In (b) a record is opened by tapping its thumbnail and shows its snapshot, annotated or clean, together with the counts, confidence and time of the event.

Figure H17

Mobile App Settings for Detection, Pi Screen and Buzzer

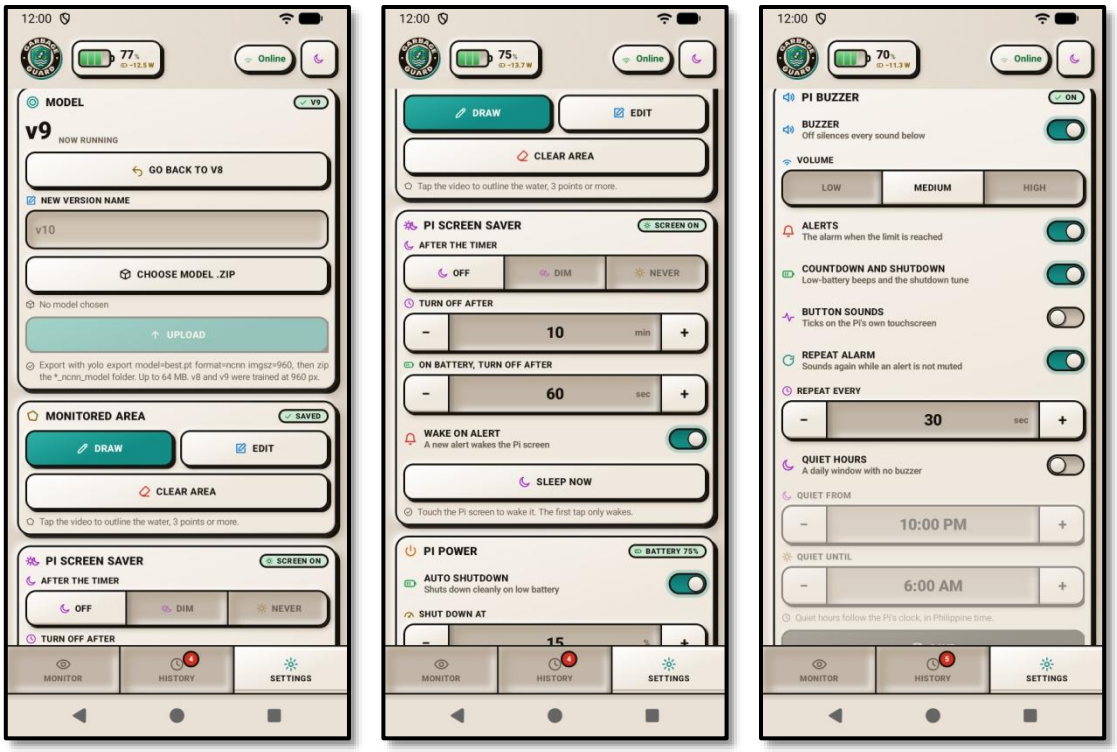


(a) (b) (c)

Figure H17 shows the middle part of the Settings screen. In (a) the Model card shows the model that is running, goes back to the previous one, and uploads a new model as a zip file under a version name. In (b) the user draws the monitored area and sets the screen saver of the Pi. In (c) the user controls the buzzer of the Pi, including the events that sound and the repeating alarm, and sets the quiet hours, whose times stay greyed out while the setting is off.

Figure H18

Mobile App Settings for Alerts, Appearance and Connection

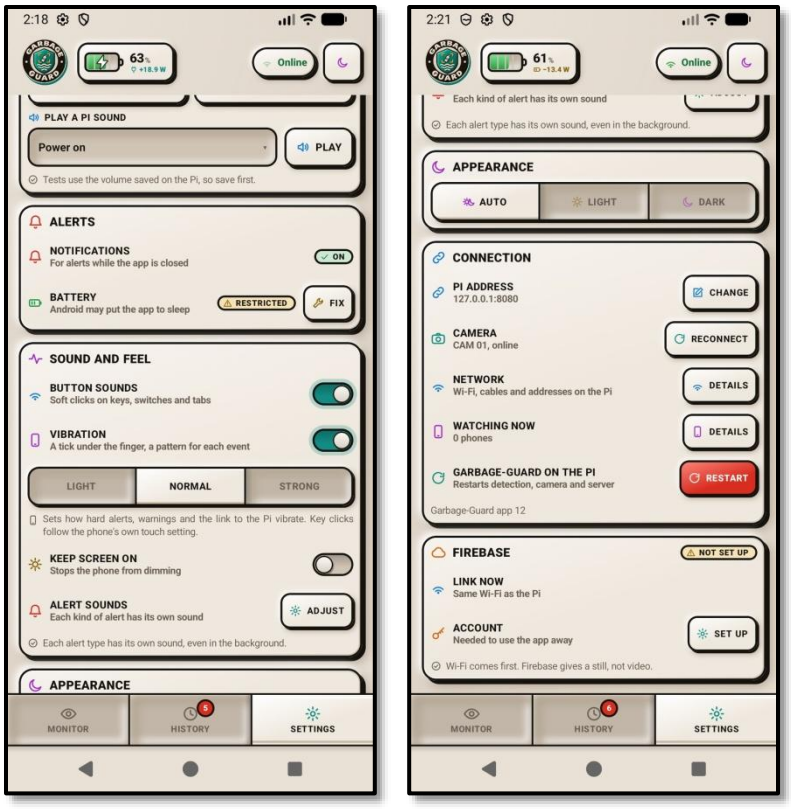


(a) (b)

Figure H18 shows the rest of the Settings screen. In (a) the phone's own alert notifications, button sounds and vibration are set. In (b) the user chooses the theme, checks the connection to the Pi and its camera, opens the network and viewer details, restarts the detection program, and links the app to Firebase.

Figure H19

Mobile App Detail Panels

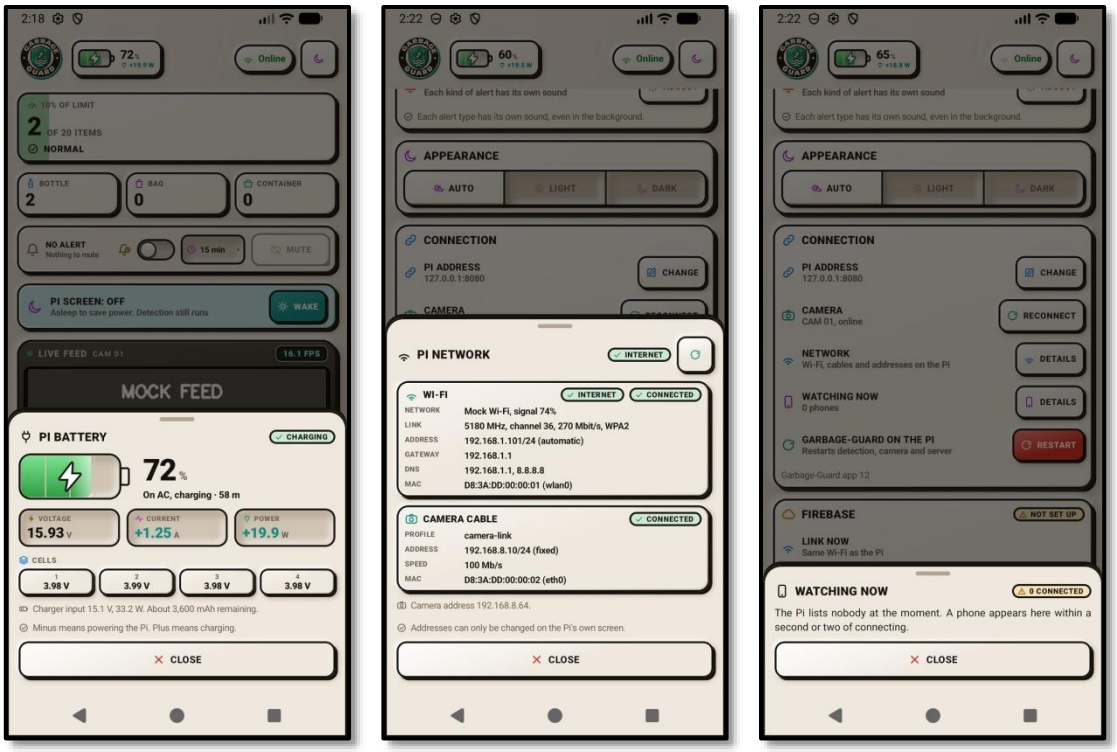

(a) (b) (c)

Figure H19 shows the detail panels of the app. In (a) the battery panel gives the charge, voltage, current, power and cell voltages of the UPS HAT. In (b) the network panel lists the Wi-Fi and camera cable addresses of the Pi. In (c) the Watching now panel lists the phones connected to the Pi.

Figure H20

Mobile App Alert Notification

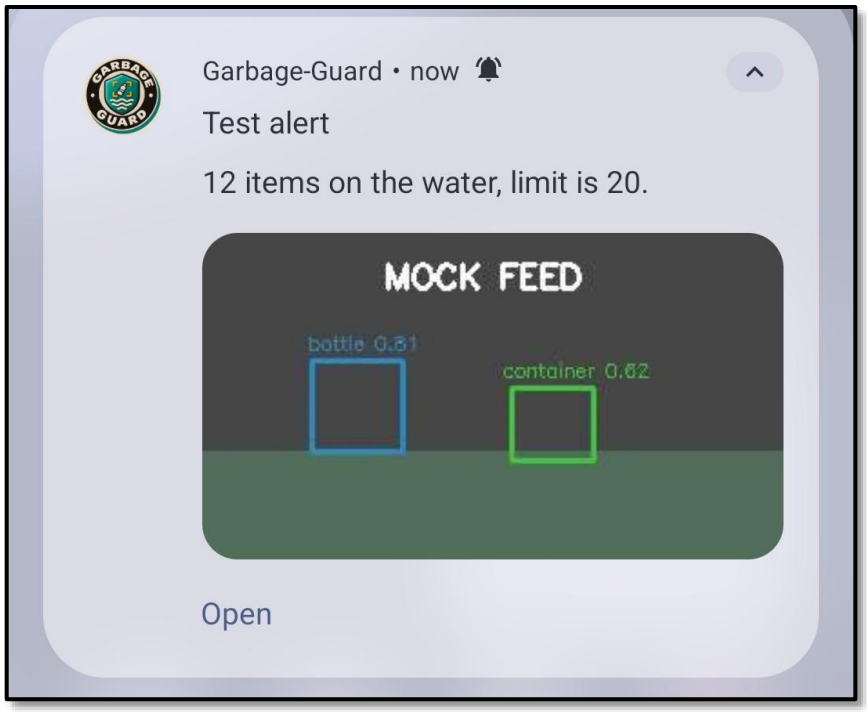


Figure H20 shows an alert notification on the phone. Each type of event has its own sound and vibration, and the notification carries the item count, the limit and the snapshot so the user can judge the situation before opening the app.

Figure H21

Mobile App in Dark Mode

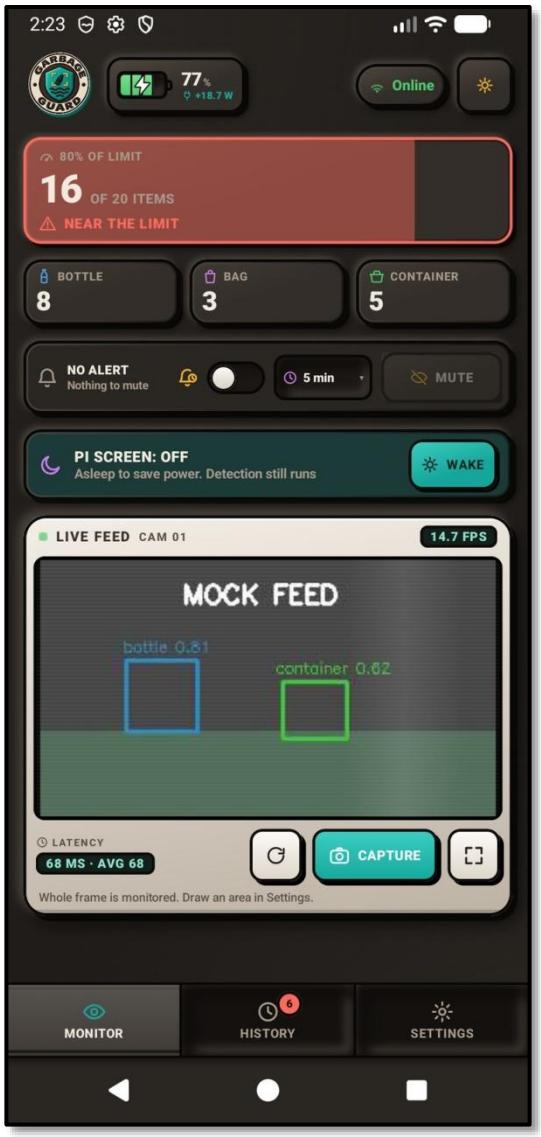


Figure H21 shows the app in dark mode, chosen under Appearance in Settings, which can also follow the phone's own theme.

Appendix I

Source Code

Listings in this appendix are from the Garbage-Guard project code repository. Listings K1 to K5 are from the Raspberry Pi 5 system: Python detection engine, accumulation counter, camera stream and cropping module, web server, and HTML dashboard served to touchscreen and browsers. Listings K6 to K10 are from the Android companion app, which is built in Kotlin with Jetpack Compose instead of XML layouts. Each listing is the entire source file as of November 5, 2026, with short explanatory comments added for the reader. The only change is in dashboard.html where two embedded logo images are printed as placeholders instead of their base64 data. Line numbers are restarted to 1 in each listing.

Listing K1. *garbageguard_live.py: Live Detection Engine and Startup (Raspberry Pi 5)*

```
"""
Garbage-Guard live detection engine + touchscreen dashboard.

    source ~/gg-env/bin/activate
    cd ~/gg
    python garbageguard_live.py

Then open http://localhost:8080 on the Pi, or http://<pi-ip>:8080 from a
phone on the same network.
"""

import os
# Must run before cv2 is imported. RTSP over TCP is a little slower than UDP, but every frame
# arrives whole.
os.environ["OPENCV_FFMPEG_CAPTURE_OPTIONS"] = "rtsp_transport;tcp"

import argparse
import collections
import json
import sqlite3
import statistics
import threading
import time
from datetime import datetime
from pathlib import Path

import cv2
import numpy as np
from ultralytics import YOLO

from gg_counter import AccumulationCounter, DisplayIds, scale_polygon, tally
import gg_buzzer
import gg_clean
import gg_clock
import gg_cloud
import gg_model
import gg_power
import gg_screen
import gg_touch
import gg_ups
import gg_view
import gg_web
from gg_snapcard import add_card

```

```python
# camera.txt (one line, full RTSP URL) overrides SOURCE, so the real camera password stays off the
# repo. gg_view derives the main (101) and sub (102) stream addresses from it.
CAMERA_FILE = Path(__file__).resolve().parent / "camera.txt"
SOURCE = "rtsp://admin:CHANGE_THIS_PASSWORD@192.168.1.64:554/Streaming/Channels/102"
if CAMERA_FILE.is_file():
    line = CAMERA_FILE.read_text().strip()
    if line:
        SOURCE = line
# NCNN export of the trained YOLO26n weights (a folder, not a .pt file). gg_model holds the
# default and the Model card can switch it. The input size is detect_size (see gg_view).
MODEL_PATH = gg_model.DEFAULT

# SMOOTH_WINDOW: frames in the median filter (gg_counter). ALERT_COOLDOWN_SEC: minimum gap between
# two alerts. WATCHDOG_S: seconds without a frame before the reader is rebuilt. PERF_FLUSH_EVERY:
# frames per perf_samples row.
SMOOTH_WINDOW = 15
ALERT_COOLDOWN_SEC = 60
WATCHDOG_S = 12
PERF_FLUSH_EVERY = 100
WEB_PORT = 8080

BASE_DIR = Path(__file__).resolve().parent
DB_PATH = BASE_DIR / "garbageguard.db"
SNAPSHOT_DIR = BASE_DIR / "snapshots"
SETTINGS_PATH = BASE_DIR / "gg_settings.json"

LABEL_PARTS = ("id", "class", "conf")
DEFAULT_LABELS = {"id": False, "class": False, "conf": True}

# Values in gg_settings.json override these. load_settings() drops any key not listed here, so a new
# setting must be added here first or it will not survive a restart.
DEFAULT_SETTINGS = {"conf": 0.40, "threshold": 20, "roi": [],
                    "labels": dict(DEFAULT_LABELS),
                    "auto_mute": False, "auto_mute_s": 900,
                    **gg_screen.DEFAULTS, **gg_power.DEFAULTS, **gg_buzzer.DEFAULTS,
                    **gg_clean.DEFAULTS, **gg_view.DEFAULTS, **gg_model.DEFAULTS}

# BGR order (OpenCV), not RGB. Keys must match model.names exactly or the box falls back to
# DEFAULT_COLOR.
CLASS_COLORS = {
    "bottle": (255, 128, 0),
    "bag": (255, 0, 200),
    "food_container": (0, 220, 0),
}
DEFAULT_COLOR = (200, 200, 200)


def open_db():
    conn = sqlite3.connect(str(DB_PATH), timeout=10)
    conn.row_factory = sqlite3.Row
    return conn


# alerts stores every logged event, not only accumulation alerts; the event column tells them apart.
# Columns added after the first field test are migrated in place at the end, so old databases keep
# working.
def init_database():
    conn = open_db()
    cur = conn.cursor()
    cur.execute("""
        CREATE TABLE IF NOT EXISTS alerts (
            id               INTEGER PRIMARY KEY AUTOINCREMENT,
            timestamp        TEXT    NOT NULL,
            smoothed_count   INTEGER NOT NULL,
            raw_count        INTEGER NOT NULL,
            n_bottle         INTEGER NOT NULL,
            n_bag            INTEGER NOT NULL,
            n_food_container INTEGER NOT NULL,
            peak_confidence  REAL,
            threshold_used   INTEGER NOT NULL,
            snapshot_path    TEXT
        )
    """)
    cur.execute("""
        CREATE TABLE IF NOT EXISTS perf_samples (
            id                INTEGER PRIMARY KEY AUTOINCREMENT,
            timestamp         TEXT    NOT NULL,
            frames_in_window  INTEGER NOT NULL,
            mean_latency_ms   REAL    NOT NULL,
            median_latency_ms REAL    NOT NULL,
            max_latency_ms    REAL    NOT NULL
```

```
        )
    """)
    cols = {r["name"] for r in cur.execute("PRAGMA table_info(alerts)")}
    if "event" not in cols:
        cur.execute("ALTER TABLE alerts ADD COLUMN event TEXT DEFAULT 'accumulation'")
    if "read" not in cols:
        cur.execute("ALTER TABLE alerts ADD COLUMN read INTEGER DEFAULT 0")
    conn.commit()
    conn.close()


def load_settings():
    s = dict(DEFAULT_SETTINGS)
    if SETTINGS_PATH.is_file():
        try:
            saved = json.loads(SETTINGS_PATH.read_text())
            if isinstance(saved, dict):
                s.update({k: saved[k] for k in DEFAULT_SETTINGS if k in saved})
        except (json.JSONDecodeError, OSError):
            pass
    return s


# Write errors are ignored on purpose so a full SD card never stops detection. If a setting keeps
# resetting after reboot, check that gg_settings.json is writable.
def save_settings(s):
    tmp = SETTINGS_PATH.with_suffix(".json.tmp")
    try:
        with open(tmp, "w") as f:
            f.write(json.dumps(s, indent=2))
            f.flush()
            os.fsync(f.fileno())
        os.replace(tmp, SETTINGS_PATH)
    except OSError:
        pass


def ink_scale(frame):
    return max(1.0, frame.shape[1] / 640.0)


def draw_roi(frame, roi_pixels):
    if roi_pixels is None:
        return
    overlay = frame.copy()
    cv2.fillPoly(overlay, [roi_pixels], (148, 158, 31))
    cv2.addWeighted(overlay, 0.15, frame, 0.85, 0, dst=frame)
    cv2.polylines(frame, [roi_pixels], True, (148, 158, 31),
                  max(2, round(2 * ink_scale(frame))))


def clean_labels(labels):
    """The three label parts as booleans, missing ones at their defaults."""
    out = dict(DEFAULT_LABELS)
    if isinstance(labels, dict):
        out.update({k: bool(labels[k]) for k in LABEL_PARTS if k in labels})
    return out


def box_label(number, name, conf, labels):
    """Text over a box, always in the order ID, class, confidence.

    Full labels ("#53 food_container 0.50") are wider than most boxes at the
    creek and stack over each other, so only the parts switched on are drawn.
    The box color already tells the class apart.
    """
    parts = []
    if labels.get("id") and number > 0:
        parts.append(f"#{number}")
    if labels.get("class"):
        parts.append(name)
    if labels.get("conf"):
        parts.append(f"{round(conf * 100)}%")
    return " ".join(parts)


# Boxes outside the ROI are drawn thin and grey and are not counted.
def draw_detection(frame, box, label, color, inside):
    k = ink_scale(frame)
    x1, y1, x2, y2 = [int(v) for v in box]
    if not inside:
```

```
        cv2.rectangle(frame, (x1, y1), (x2, y2), (120, 120, 120), max(1, round(k)))
        return
    cv2.rectangle(frame, (x1, y1), (x2, y2), color, max(2, round(2 * k)))
    if not label:
        return
    size, weight = 0.45 * k, max(1, round(k))
    (tw, th), _ = cv2.getTextSize(label, cv2.FONT_HERSHEY_SIMPLEX, size, weight)
    pad = round(3 * k)
    cv2.rectangle(frame, (x1, y1 - th - 2 * pad), (x1 + tw + 2 * pad, y1), color, -1)
    cv2.putText(frame, label, (x1 + pad, y1 - pad),
                cv2.FONT_HERSHEY_SIMPLEX, size, (0, 0, 0), weight, cv2.LINE_AA)


class FrameReader:
    """Keeps the RTSP queue drained so the engine always gets the newest frame."""

    STALE_S = 3.0

    def __init__(self, open_fn):
        self.open_fn = open_fn
        self.lock = threading.Lock()
        self.frame = None
        self.captured_at = 0.0
        self.last_ok = 0.0
        self.seq = 0
        self.stamps = collections.deque(maxlen=90)
        self.stop_flag = threading.Event()
        self.thread = None
        self.started = time.perf_counter()

    @property
    def alive(self):
        return time.perf_counter() - self.last_ok <= self.STALE_S

    def silent_for(self):
        ref = self.last_ok or self.started
        return time.perf_counter() - ref

    def start(self):
        self.thread = threading.Thread(target=self._loop, daemon=True)
        self.thread.start()
        return self

    def _loop(self):
        cap = self.open_fn()
        misses = 0
        while not self.stop_flag.is_set():
            ok, frame = cap.read()
            if self.stop_flag.is_set():
                break
            if not ok:
                misses += 1
                # About one second of failed reads (50 x 20 ms) before the capture is reopened.
                # 'Stream lost' in the log means this branch ran.
                if misses > 50:
                    print("Stream lost. Reconnecting...")
                    cap.release()
                    time.sleep(2.0)
                    if self.stop_flag.is_set():
                        return
                    cap = self.open_fn()
                    misses = 0
                time.sleep(0.02)
                continue
            misses = 0
            now = time.perf_counter()
            with self.lock:
                self.frame = frame
                self.captured_at = now
                self.last_ok = now
                self.seq += 1
                self.stamps.append(now)
        cap.release()

    # Returns None until a frame newer than after_seq exists, so the engine never runs inference
    # twice on the same frame.
    def latest(self, after_seq):
        with self.lock:
            if self.frame is None or self.seq == after_seq:
                return None, after_seq, 0.0
            return self.frame, self.seq, self.captured_at
```

```
288
289     def fps(self):
290         with self.lock:
291             stamps = list(self.stamps)
292         recent = [t for t in stamps if time.perf_counter() - t <= 2.0]
293         if len(recent) < 2:
294             return 0.0
295         return (len(recent) - 1) / (recent[-1] - recent[0])
296
297     def stop(self):
298         self.stop_flag.set()
299
300
301 def jpg_names(folder):
302     try:
303         with os.scandir(folder) as it:
304             return {e.name for e in it if e.name.lower().endswith(".jpg")}
305     except OSError:
306         return set()
307
308
309 def _short(e, n=120):
310     text = str(e).strip().splitlines()[0] if str(e).strip() else type(e).__name__
311     return text if len(text) <= n else text[:n - 1] + "…"
312
313
314 def reset_tracker(model):
315     for t in getattr(getattr(model, "predictor", None), "trackers", None) or []:
316         try:
317             t.reset()
318         except Exception:
319             pass
320
321
322 # Owns the model, the counter and all live state. self.lock guards everything the web thread reads
323 # (jpeg, counts, settings); hold it only to copy values, never during inference.
324 class Engine:
325     def __init__(self, source, model_path, settings):
326         self.source = source
327         self.view = gg_view.StreamChoice(source, settings.get("stream", "main"))
328         self.frame_size = None
329         self.det_box = None
330         self.model_path = str(model_path)
331         self.model_name = Path(self.model_path).name
332         self.model_note = ""
333         self.model_request = None
334         self.model_loading = None
335         self.model_flag = threading.Event()
336         self._models = ([], 0.0)
337         self.fresh_models = set()
338         self._upload_lock = threading.Lock()
339         self.settings = settings
340         self.lock = threading.Lock()
341         self.stop_flag = threading.Event()
342
343         self.jpeg = None
344         self.raw_frame = None
345         self.annotated = None
346         self.snapshot_dir = SNAPSHOT_DIR
347         self.clean = gg_clean.Clean(settings, SNAPSHOT_DIR, save=lambda: save_settings(settings))
348         self.connected = False
349         self.counts = {}
350         self.raw_count = 0
351         self.smoothed = 0
352         self.peak_conf = 0.0
353         self.latency_ms = 0.0
354         self.alert_active = False
355         self.mute_until = 0.0
356         self.mute_total = 0
357         self.auto_muted = False
358         self.frames = 0
359         self.reader = None
360         self.reconnect_flag = threading.Event()
361         self.reconnect_reason = ""
362         self.reconnects = 0
363         self.proc_stamps = collections.deque(maxlen=90)
364         self.all_latencies = []
365         self.started_at = time.time()
366         self.on_alert = None
367         self.on_event = None
368
```

```
        self.counter = AccumulationCounter(
            threshold=settings["threshold"],
            window=SMOOTH_WINDOW,
            cooldown=ALERT_COOLDOWN_SEC,
        )
        self.names = {}
        self.display_ids = DisplayIds()

    # Payload of GET /api/state. Both FPS values read 0 while disconnected so the dashboard never
    # shows a stale rate.
    def snapshot_state(self):
        with self.lock:
            avg = (sum(self.all_latencies) / len(self.all_latencies)
                   if self.all_latencies else 0.0)
            recent = [t for t in self.proc_stamps if time.perf_counter() - t <= 2.0]
            proc_fps = ((len(recent) - 1) / (recent[-1] - recent[0])
                        if len(recent) >= 2 else 0.0)
            cam_fps = self.reader.fps() if self.reader is not None else proc_fps
            if not self.connected:
                cam_fps = proc_fps = 0.0
            return {
                "connected": self.connected,
                "counts": dict(self.counts),
                "raw": self.raw_count,
                "smoothed": self.smoothed,
                "threshold": self.counter.on,
                "rearm": self.counter.off,
                "conf": self.settings["conf"],
                "roi": list(self.settings["roi"]),
                "labels": clean_labels(self.settings.get("labels")),
                "latency_ms": round(self.latency_ms, 1),
                "avg_latency_ms": round(avg, 1),
                "fps": round(proc_fps, 1),
                "cam_fps": round(cam_fps, 1),
                "alert_active": self.alert_active,
                "muted": self._muted_locked(),
                "mute_left": self._mute_left_locked(),
                "mute_total": self.mute_total,
                "auto_muted": self.auto_muted and self._muted_locked(),
                "auto_mute": bool(self.settings.get("auto_mute")),
                "auto_mute_s": int(self.settings.get("auto_mute_s", 0)),
                "frames": self.frames,
                **self.view.fields(),
                "frame_size": ("%dx%d" % self.frame_size) if self.frame_size else None,
                "detect_size": int(self.settings["detect_size"]),
                "crop": bool(self.settings["crop"]),
                "detect_box": list(self.det_box) if self.det_box else None,
                "model": self.model_name,
                "model_label": gg_model.label(self.model_name),
                "model_wanted": self.model_request or self.model_loading or self.settings.get("model"),
                "model_loading": self.model_request is not None or self.model_loading is not None,
                "models": self._installed_models(),
                "model_note": self.model_note,
                **self._prev_fields(),
                "reconnects": self.reconnects,
                "uptime_s": int(time.time() - self.started_at),
            }

    def _muted_locked(self):
        return self.mute_until == float("inf") or self.mute_until > time.time()

    def _mute_left_locked(self):
        if self.mute_until == float("inf"):
            return None
        left = self.mute_until - time.time()
        return int(left) if left > 0 else 0

    def is_muted(self):
        with self.lock:
            return self._muted_locked()

    # seconds 0 or None mutes until cancelled (mute_until = inf). Mute and unmute are logged as
    # events, so the history shows when an alert was silenced.
    def set_mute(self, seconds=None, cancel=False, auto=False):
        with self.lock:
            was = self._muted_locked()
            if cancel:
                self.mute_until = 0.0
                self.mute_total = 0
            elif seconds in (0, None):
                self.mute_until = float("inf")
```

```
                self.mute_total = 0
            else:
                self.mute_total = max(1, int(seconds))
                self.mute_until = time.time() + self.mute_total
            self.auto_muted = auto and not cancel
            now_muted = self._muted_locked()
            left = self._mute_left_locked()
        if now_muted != was:
            if now_muted:
                self._log_simple("auto_muted" if auto else "muted")
            else:
                self._log_simple("unmuted")
        return {"muted": now_muted, "mute_left": left}

    def set_auto_mute(self, on=None, seconds=None):
        with self.lock:
            if on is not None:
                self.settings["auto_mute"] = bool(on)
            if seconds is not None:
                self.settings["auto_mute_s"] = max(0, int(seconds))
            save_settings(self.settings)
            return {"auto_mute": self.settings["auto_mute"],
                    "auto_mute_s": self.settings["auto_mute_s"]}

    def clear_mute(self, log=True):
        with self.lock:
            was = self._muted_locked()
            self.mute_until = 0.0
            self.mute_total = 0
            self.auto_muted = False
        if was and log:
            self._log_simple("unmuted")
        return was

    def log_note(self, event):
        self._log_simple(event)

    def _log_simple(self, event):
        st = self.snapshot_state()
        self._log_event(event, st["counts"], st["raw"], st["smoothed"], None, None)

    # Read flags live in the database, so marking a row read on a phone also clears it on the
    # dashboard and on every other phone.
    def mark_read(self, ids=None, every=False, read=True):
        val = 1 if read else 0
        conn = open_db()
        if every:
            cur = conn.execute("UPDATE alerts SET read=?", (val,))
        elif ids:
            cur = conn.execute(
                "UPDATE alerts SET read=? WHERE id IN (%s)" % ",".join("?" * len(ids)),
                [val] + [int(i) for i in ids])
        else:
            conn.close()
            return {"changed": 0}
        n = cur.rowcount
        conn.commit()
        conn.close()
        return {"changed": max(0, n)}

    def get_jpeg(self):
        with self.lock:
            return self.jpeg

    # conf is clamped to 0.05-0.95. A new threshold also moves the re-arm level (see rearm_level in
    # gg_counter).
    def update_settings(self, conf=None, threshold=None):
        with self.lock:
            if conf is not None:
                self.settings["conf"] = max(0.05, min(0.95, float(conf)))
            if threshold is not None:
                t = max(1, int(threshold))
                self.settings["threshold"] = t
                self.counter.set_threshold(t)
            save_settings(self.settings)
            return dict(self.settings)

    def set_labels(self, labels):
        """Switch label parts on or off. Parts left out keep their setting."""
        with self.lock:
            cur = clean_labels(self.settings.get("labels"))
```

```
            if isinstance(labels, dict):
                cur.update({k: bool(labels[k]) for k in LABEL_PARTS if k in labels})
            self.settings["labels"] = cur
            save_settings(self.settings)
            return dict(cur)

    # Camera stream card in Settings. Changing the stream forces a reconnect; detect_size and crop
    # apply from the next frame.
    def set_view(self, stream=None, detect_size=None, crop=None):
        with self.lock:
            if detect_size is not None:
                self.settings["detect_size"] = detect_size
            if crop is not None:
                self.settings["crop"] = crop
            changed = stream is not None and stream != self.settings.get("stream")
            if stream is not None:
                self.settings["stream"] = stream
            gg_view.clean_settings(self.settings)
            save_settings(self.settings)
            if changed:
                self.view.want(self.settings["stream"])
            out = {k: self.settings[k] for k in gg_view.DEFAULTS}
        if changed:
            self.reconnect("stream changed")
        return out

    def _installed_models(self):
        found, at = self._models
        if time.monotonic() - at > 5:
            found = gg_model.list_models(BASE_DIR)
            self._models = (found, time.monotonic())
        return [dict(m) for m in found]

    def _prev_fields(self):
        prev = self.settings.get("model_prev")
        if prev == self.model_name or not any(m["name"] == prev for m in self._installed_models()):
            prev = None
        return {"model_prev": prev, "model_prev_label": gg_model.label(prev) if prev else None}

    def upload_model(self, version, stream, length):
        """Installs a zipped model sent to POST /api/model/upload and switches to it."""
        if not self._upload_lock.acquire(blocking=False):
            return 409, {"ok": False, "error": "busy",
                         "message": "Another model upload is still in progress."}
        try:
            name = gg_model.install(stream, length, version, BASE_DIR)
        except gg_model.UploadError as e:
            return e.status, {"ok": False, "error": e.code, "message": e.message}
        except OSError as e:
            return 500, {"ok": False, "error": "disk",
                         "message": f"The Pi could not save the model: {_short(e)}"}
        finally:
            self._upload_lock.release()
        print(f"[MODEL] Received {gg_model.label(name)} by upload.", flush=True)
        with self.lock:
            self.fresh_models.add(name)
            self._models = ([], 0.0)
        res = self.set_model(name)
        res["installed"] = name
        res["label"] = gg_model.label(name)
        return 200, res

    def set_model(self, name):
        if not gg_model.valid(name, BASE_DIR):
            return {"ok": False, "error": "That model is not installed on the Pi.",
                    "model": self.model_name}
        with self.lock:
            self.settings["model"] = name
            save_settings(self.settings)
            self.model_note = ""
            if name == self.model_name:
                self.model_request = None
                return {"ok": True, "model": self.model_name, "pending": None}
            self.model_request = name
        self.model_flag.set()
        return {"ok": True, "model": self.model_name, "pending": name}

    def _load_model(self, path, check=True):
        model = YOLO(str(path), task="detect")
        names = model.names
        problem = gg_model.class_problem(names)
```

```
612         if check and problem:
613             raise ValueError(problem)
614         if check:
615             model.track(np.zeros((360, 640, 3), np.uint8), persist=True,
616                         tracker="bytetrack.yaml", imgsz=640, verbose=False)
617             reset_tracker(model)
618         return model
619 
620     def _first_model(self):
621         default = BASE_DIR / gg_model.DEFAULT
622         if Path(self.model_path).name == gg_model.DEFAULT or not gg_model.valid(gg_model.DEFAULT,
    BASE_DIR):
623             return self._load_model(self.model_path, check=False)
624         try:
625             return self._load_model(self.model_path)
626         except Exception as e:
627             bad = gg_model.label(self.model_name)
628             print(f"[MODEL] Could not load {bad} ({e}). Starting with {gg_model.label(gg_model.DEFAULT)}.",
    flush=True)
629             with self.lock:
630                 self.model_note = f"Could not load {bad} at start, using
    {gg_model.label(gg_model.DEFAULT)}: {_short(e)}"
631                 self.model_path = str(default)
632                 self.model_name = default.name
633                 self.settings["model"] = default.name
634                 save_settings(self.settings)
635             return self._load_model(default, check=False)
636 
637     def _swap_model(self, model):
638         with self.lock:
639             name, self.model_request = self.model_request, None
640             self.model_loading = name
641         try:
642             return self._swap_to(model, name)
643         finally:
644             with self.lock:
645                 self.model_loading = None
646 
647     def _swap_to(self, model, name):
648         if not name or name == self.model_name:
649             return model
650         new_label, old_label = gg_model.label(name), gg_model.label(self.model_name)
651         print(f"[MODEL] Loading {new_label}...", flush=True)
652         try:
653             if not gg_model.valid(name, BASE_DIR):
654                 raise ValueError("its folder is missing or incomplete")
655             new = self._load_model(BASE_DIR / name)
656         except Exception as e:
657             print(f"[MODEL] Could not load {new_label}, still using {old_label}: {e}", flush=True)
658             with self.lock:
659                 self.model_note = f"Could not load {new_label}, still using {old_label}: {_short(e)}"
660                 if name in self.fresh_models:
661                     self.fresh_models.discard(name)
662                     if gg_model.remove(name, BASE_DIR):
663                         self.model_note = self.model_note.rstrip(".") + f". The uploaded {new_label} was
    removed."
664                     self._models = ([], 0.0)
665                 if self.model_request is None:
666                     self.settings["model"] = self.model_name
667                     save_settings(self.settings)
668             return model
669         with self.lock:
670             self.fresh_models.discard(name)
671             self.settings["model_prev"] = self.model_name
672             save_settings(self.settings)
673             self.model_path = str(BASE_DIR / name)
674             self.model_name = name
675             self.names = new.names
676             self.model_note = ""
677             self.counts = {}
678             self.raw_count = 0
679             self.peak_conf = 0.0
680             self.display_ids = DisplayIds()
681         print(f"[MODEL] Now using {new_label}. Classes: {self.names}", flush=True)
682         return new
683 
684     # Points arrive normalised (0..1) from the dashboard or the app. Fewer than three points clears
685     # the ROI, which means the whole frame counts.
686     def set_roi(self, points):
687         clean = []
688         for p in points or []:
```

```
            x, y = float(p[0]), float(p[1])
            clean.append([max(0.0, min(1.0, x)), max(0.0, min(1.0, y))])
        if len(clean) < 3:
            clean = []
        with self.lock:
            self.settings["roi"] = clean
            save_settings(self.settings)
            return clean

    # Cheap fingerprint of the history. The dashboard sends it back with each poll and the full list
    # is only re-sent when it changes.
    def alerts_sig(self):
        """Changes whenever a record is added, deleted or marked read or unread."""
        conn = open_db()
        n, top, unread = conn.execute(
            "SELECT COUNT(*), COALESCE(MAX(id),0), COALESCE(SUM(COALESCE(read,0)=0),0)"
            " FROM alerts").fetchone()
        conn.close()
        return f"{n}.{top}.{unread}.{len(jpg_names(SNAPSHOT_DIR))}"

    def alerts_total(self):
        conn = open_db()
        n = conn.execute("SELECT COUNT(*) FROM alerts").fetchone()[0]
        conn.close()
        return int(n)

    # Payload of GET /api/alerts. snapshot is None when the file has been deleted from disk, so the
    # history never shows a broken picture.
    def recent_alerts(self, limit=50):
        """Newest records first. A limit of 0 or less returns every record."""
        limit = int(limit)
        conn = open_db()
        rows = conn.execute(
            "SELECT id, timestamp, event, smoothed_count, raw_count, n_bottle, n_bag,"
            " n_food_container, peak_confidence, threshold_used, snapshot_path,"
            " COALESCE(read,0) AS read FROM alerts ORDER BY id DESC LIMIT ?",
            (limit if limit > 0 else -1,)
        ).fetchall()
        conn.close()
        pics = jpg_names(SNAPSHOT_DIR)
        cleans = jpg_names(SNAPSHOT_DIR / gg_clean.FOLDER)
        out = []
        for r in rows:
            d = dict(r)
            name = Path(d["snapshot_path"]).name if d.get("snapshot_path") else None
            d["snapshot"] = name if name in pics else None
            d["clean"] = d["snapshot"] if d["snapshot"] in cleans else None
            out.append(d)
        return out

    # Snapshot files are removed only when they sit directly inside SNAPSHOT_DIR, so a bad path in
    # the database can never delete anything else.
    def delete_alerts(self, ids=None, every=False, dfrom=None, dto=None):
        where, args = [], []
        if every:
            where.append("1=1")
        if ids:
            where.append("id IN (%s)" % ",".join("?" * len(ids)))
            args += [int(i) for i in ids]
        if dfrom:
            where.append("date(timestamp) >= date(?)")
            args.append(dfrom)
        if dto:
            where.append("date(timestamp) <= date(?)")
            args.append(dto)
        if not where:
            return {"deleted": 0, "files_removed": 0}

        clause = " AND ".join(where) if not every else "1=1"
        conn = open_db()
        rows = conn.execute(
            f"SELECT id, snapshot_path FROM alerts WHERE {clause}", args).fetchall()
        removed = 0
        folder = Path(SNAPSHOT_DIR).resolve()
        for r in rows:
            sp = r["snapshot_path"]
            if not sp:
                continue
            try:
                target = Path(sp).resolve()
                if target.parent == folder:
```

```
                    gg_clean.remove(target)
                    if target.is_file():
                        target.unlink()
                        removed += 1
            except OSError:
                pass
        conn.execute(f"DELETE FROM alerts WHERE {clause}", args)
        conn.commit()
        conn.close()
        self.clean.forget()
        return {"deleted": len(rows), "files_removed": removed}

    # Every event lands here, including mute and unmute notes. on_event drives the buzzer; a buzzer
    # fault is printed and swallowed so it cannot stop detection.
    def _log_event(self, event, counts, raw, smoothed, peak, snap):
        conn = open_db()
        conn.execute(
            "INSERT INTO alerts (timestamp, event, smoothed_count, raw_count,"
            " n_bottle, n_bag, n_food_container, peak_confidence, threshold_used,"
            " snapshot_path) VALUES (?,?,?,?,?,?,?,?,?,?)",
            (datetime.now().isoformat(sep=" ", timespec="seconds"), event,
             int(smoothed), int(raw), int(counts.get("bottle", 0)),
             int(counts.get("bag", 0)), int(counts.get("food_container", 0)),
             float(peak) if peak else None, int(self.counter.on),
             str(snap) if snap else None))
        conn.commit()
        conn.close()
        if self.on_event:
            try:
                self.on_event(event)
            except Exception as e:
                print(f"[BUZZER] {e}", flush=True)

    # Saves the annotated frame with the info card from gg_snapcard. The clean copy (raw frame, no
    # boxes) is written only when the clean-copy mode wants this tag. Microseconds in the file name
    # keep two events in the same second from overwriting each other.
    def _save_snapshot(self, tag, state):
        with self.lock:
            src = self.annotated if self.annotated is not None else self.raw_frame
            frame = None if src is None else src.copy()
            raw = None if self.raw_frame is None else self.raw_frame.copy()
            peak = self.peak_conf
        if frame is None:
            return None
        frame = add_card(frame, tag, state, peak)
        path = SNAPSHOT_DIR / f"{tag}_{datetime.now():%Y%m%d_%H%M%S_%f}.jpg"
        cv2.imwrite(str(path), frame)
        if raw is not None and self.clean.wanted(tag):
            target = gg_clean.path_for(path)
            try:
                target.parent.mkdir(parents=True, exist_ok=True)
                cv2.imwrite(str(target), raw, [cv2.IMWRITE_JPEG_QUALITY, 95])
            except (OSError, cv2.error) as e:
                print(f"[CLEAN] {e}", flush=True)
            self.clean.forget()
        return path

    def fire_test_alert(self):
        return self._manual_event("test", "test")

    def capture_snapshot(self):
        return self._manual_event("manual", "capture")

    def _manual_event(self, event, tag):
        state = self.snapshot_state()
        state["timestamp"] = datetime.now().isoformat(sep=" ", timespec="seconds")
        snap = self._save_snapshot(tag, state)
        self._log_event(event, state["counts"], state["raw"],
                        state["smoothed"], self.peak_conf, snap)
        return snap is not None

    # A digit source is a USB webcam index. The open and read timeouts stop cv2 from hanging on a
    # dead camera; older OpenCV builds lack them, hence hasattr. BUFFERSIZE=1 keeps latency low.
    def _open(self):
        url = self.view.url
        if str(url).isdigit():
            return cv2.VideoCapture(int(url))
        params = []
        for name, ms in (("CAP_PROP_OPEN_TIMEOUT_MSEC", 5000),
                         ("CAP_PROP_READ_TIMEOUT_MSEC", 5000)):
            if hasattr(cv2, name):
```

```
                params += [getattr(cv2, name), ms]
        cap = cv2.VideoCapture(url, cv2.CAP_FFMPEG, params) if params \
            else cv2.VideoCapture(url)
        if str(url).lower().startswith("rtsp"):
            cap.set(cv2.CAP_PROP_BUFFERSIZE, 1)
        return cap

    def reconnect(self, reason="manual"):
        self.reconnect_flag.set()
        self.reconnect_reason = reason
        return True

    # Display numbers are reset as well, because tracker IDs from the old stream mean nothing after
    # a reconnect.
    def _swap_reader(self):
        old = self.reader
        print(f"Camera reconnect ({self.reconnect_reason}).")
        if old is not None:
            old.stop()
        reader = FrameReader(self._open).start()
        with self.lock:
            self.reader = reader
            self.connected = False
            self.jpeg = None
            self.reconnects += 1
            self.display_ids = DisplayIds()
        return reader

    def run(self, show_window=False):
        print(f"Loading model: {self.model_path}")
        model = self._first_model()
        self.names = model.names
        print(f"Classes: {self.names}")

        # Live sources (RTSP or webcam) go through FrameReader. A video file is read directly so no
        # frame is skipped when replaying a recording.
        live = (str(self.source).lower().startswith("rtsp")
                or str(self.source).isdigit())

        cap = None
        reader = None
        if live:
            reader = FrameReader(self._open).start()
            self.reader = reader
        else:
            cap = self._open()
            if not cap.isOpened():
                print("ERROR: could not open the video source.")
                return

        seq = 0
        latency_window = []

        while not self.stop_flag.is_set():
            if self.model_flag.is_set():
                self.model_flag.clear()
                model = self._swap_model(model)
            if live:
                if self.reconnect_flag.is_set():
                    self.reconnect_flag.clear()
                    reader = self._swap_reader()
                    seq = 0
                # Watchdog. 'Camera reconnect (no frames)' in the log comes from here.
                elif reader.silent_for() > WATCHDOG_S:
                    self.reconnect_reason = "no frames"
                    if not reader.last_ok and self.view.main_gave_nothing():
                        print(f"[STREAM] {self.view.note}.")
                    reader = self._swap_reader()
                    seq = 0
                frame, seq, captured_at = reader.latest(seq)
                if frame is None:
                    with self.lock:
                        self.connected = reader.alive
                    time.sleep(0.005)
                    continue
                # Latency is timed from capture, not from the start of inference, so it includes the
                # time the frame waited.
                t0 = captured_at
            else:
                t0 = time.perf_counter()
                ok, frame = cap.read()
```

```
                if not ok:
                    print("End of video file.")
                    break

            with self.lock:
                conf = self.settings["conf"]
                roi_norm = list(self.settings["roi"])
                size = int(self.settings["detect_size"])
                use_crop = bool(self.settings["crop"])

            h, w = frame.shape[:2]
            roi_poly = scale_polygon(roi_norm, w, h)
            # Only the box around the ROI goes to the model, at detect_size pixels, so far items
            # keep their detail. A new box or frame size resets the tracker, since old IDs no longer
            # line up.
            box = gg_view.crop_box(roi_poly, w, h) if use_crop else None
            if box != self.det_box or (w, h) != self.frame_size:
                reset_tracker(model)
                self.display_ids = DisplayIds()
            if box is None:
                part, dx, dy = frame, 0, 0
            else:
                part, dx, dy = frame[box[1]:box[3], box[0]:box[2]], box[0], box[1]

            try:
                # ByteTrack keeps IDs across frames (persist=True). conf is read from settings each
                # frame, so a slider change applies on the next frame.
                results = model.track(np.ascontiguousarray(part), persist=True,
                                      tracker="bytetrack.yaml",
                                      conf=conf, imgsz=size, verbose=False)
            except Exception as e:
                if size == 640:
                    raise
                print(f"[DETECT] {size} px failed ({e}); going back to 640 px.", flush=True)
                with self.lock:
                    self.settings["detect_size"] = 640
                    self.view.note = f"The model could not run at {size} px, using 640 px"
                    save_settings(self.settings)
                reset_tracker(model)
                continue
            latency_ms = (time.perf_counter() - t0) * 1000.0

            dets = []
            boxes = results[0].boxes
            if boxes is not None and len(boxes) > 0:
                xyxy = boxes.xyxy.cpu().numpy()
                cls = boxes.cls.cpu().numpy().astype(int)
                cf = boxes.conf.cpu().numpy()
                # boxes.id is None until the tracker confirms a track; those detections get -1 and
                # no number on screen.
                ids = (boxes.id.cpu().numpy().astype(int)
                       if boxes.id is not None else np.full(len(cls), -1))
                for b, c, v, i in zip(xyxy, cls, cf, ids):
                    dets.append({"box": gg_view.shift(tuple(float(x) for x in b), dx, dy),
                                 "name": self.names.get(int(c), str(c)),
                                 "conf": float(v), "id": int(i)})

            # Only boxes whose centre is inside the ROI are counted.
            flags, counts, raw_count, peak = tally(dets, roi_poly)
            numbers = self.display_ids.assign([d["id"] for d in dets])

            annotated, f = gg_view.for_display(frame)
            roi_show = scale_polygon(roi_norm, annotated.shape[1], annotated.shape[0])
            draw_roi(annotated, np.array(roi_show, dtype=np.int32)
                     if roi_show is not None else None)
            labels = clean_labels(self.settings.get("labels"))
            for d, inside, n in zip(dets, flags, numbers):
                draw_detection(annotated, gg_view.scale_box(d["box"], f),
                               box_label(n, d["name"], d["conf"], labels),
                               CLASS_COLORS.get(d["name"], DEFAULT_COLOR), inside)

            # Median-smoothed count with hysteresis. step.alert is true only on the frame where the
            # threshold is crossed.
            step = self.counter.update(raw_count)

            with self.lock:
                self.raw_frame = frame
                self.annotated = annotated
                self.frame_size = (w, h)
                self.det_box = box
                self.connected = True
```

```
                self.counts = dict(counts)
                self.raw_count = raw_count
                self.smoothed = step.smoothed
                self.peak_conf = peak
                self.latency_ms = latency_ms
                self.alert_active = step.active
                self.frames += 1
                self.proc_stamps.append(time.perf_counter())
                self.all_latencies.append(latency_ms)
                # Quality 75 keeps /frame.jpg small enough for the phone to poll over Wi-Fi.
                ok_enc, buf = cv2.imencode(".jpg", annotated,
                                           [cv2.IMWRITE_JPEG_QUALITY, 75])
                if ok_enc:
                    self.jpeg = buf.tobytes()

            state = self.snapshot_state()
            state["timestamp"] = datetime.now().isoformat(sep=" ", timespec="seconds")

            # Muted: the alert is printed only. Nothing is logged and no snapshot is taken.
            if step.alert and self.is_muted():
                print(f"[MUTED] alert suppressed at count={step.smoothed}")

            elif step.alert:
                snap = self._save_snapshot("alert", state)
                self._log_event("accumulation", counts, raw_count,
                                step.smoothed, peak, snap)
                if self.on_alert:
                    self.on_alert()
                print(f"[ALERT] count={step.smoothed} "
                      f"bottle={counts.get('bottle',0)} "
                      f"bag={counts.get('bag',0)} "
                      f"food_container={counts.get('food_container',0)}")
                with self.lock:
                    auto = bool(self.settings.get("auto_mute"))
                    auto_s = int(self.settings.get("auto_mute_s", 0))
                # Auto-mute starts after the alert is logged, so the first alert of a pile-up is
                # always recorded.
                if auto:
                    self.set_mute(seconds=auto_s, auto=True)
                    print("[AUTO-MUTE] " + (f"{auto_s}s" if auto_s else "until unmuted"))

            # A raw spike over the threshold that never got past the median filter. Logged as
            # 'suppressed' so false alarms can be reviewed later.
            if step.suppressed:
                snap = self._save_snapshot("suppressed", state)
                self._log_event("suppressed", counts, step.suppressed["peak"],
                                step.smoothed, peak, snap)
                print(f"[SUPPRESSED] {step.suppressed['frames']} frames, "
                      f"peak {step.suppressed['peak']}")

            # Count fell to the re-arm level: the alert ends and a mute set for it is lifted.
            if step.cleared:
                if self.clear_mute():
                    print("[CLEAR] mute lifted with the alert")
                print(f"[CLEAR] count fell to {step.smoothed}")

            latency_window.append(latency_ms)
            # One perf_samples row per PERF_FLUSH_EVERY frames; the performance efficiency figures
            # are read from this table.
            if len(latency_window) >= PERF_FLUSH_EVERY:
                conn = open_db()
                conn.execute(
                    "INSERT INTO perf_samples (timestamp, frames_in_window,"
                    " mean_latency_ms, median_latency_ms, max_latency_ms)"
                    " VALUES (?,?,?,?,?)",
                    (datetime.now().isoformat(sep=" ", timespec="seconds"),
                     len(latency_window),
                     sum(latency_window) / len(latency_window),
                     statistics.median(latency_window), max(latency_window)))
                conn.commit()
                conn.close()
                latency_window = []

            if show_window:
                cv2.imshow("Garbage-Guard", annotated)
                if (cv2.waitKey(1) & 0xFF) == ord("q"):
                    break

    if reader is not None:
        reader.stop()
    if cap is not None:
```

```
            cap.release()
        if show_window:
            cv2.destroyAllWindows()
        self.summary()

    # Printed on exit. The bands follow the response-time scale used in the performance efficiency
    # test.
    def summary(self):
        if not self.all_latencies:
            return
        mean = sum(self.all_latencies) / len(self.all_latencies)
        band = ("Excellent (<0.5s)" if mean < 500 else
                "Very Good (0.51-1.5s)" if mean < 1500 else
                "Good (1.51-3.0s)" if mean < 3000 else
                "Fair (3.1-5.0s)" if mean < 5000 else "Poor (>5.0s)")
        print("\n" + "=" * 64)
        print(" SESSION SUMMARY")
        print("=" * 64)
        print(f" frames processed : {len(self.all_latencies)}")
        print(f" mean latency     : {mean:.1f} ms  ({mean/1000:.3f} s)")
        print(f" median latency   : {statistics.median(self.all_latencies):.1f} ms")
        print(f" max latency      : {max(self.all_latencies):.1f} ms")
        print(f" effective FPS    : {1000.0/mean:.1f}")
        print(f" ISO 25010 band   : {band}")
        print("=" * 64)


def main():
    # --no-web runs detection alone (no dashboard, screen, buzzer or cloud), which is the quickest
    # way to check the camera and the model. --display opens the OpenCV window; press q to quit.
    ap = argparse.ArgumentParser(description="Garbage-Guard live detection")
    ap.add_argument("--source", default=SOURCE)
    ap.add_argument("--model", default=None,
                    help="model folder to start with (default: the one picked in Settings, v8)")
    ap.add_argument("--conf", type=float, default=None)
    ap.add_argument("--threshold", type=int, default=None)
    ap.add_argument("--stream", choices=("main", "sub"), default=None,
                    help="camera stream to read (default: saved setting, main)")
    ap.add_argument("--detect-size", type=int, default=None,
                    help="pixels the model works at: 640, 960 or 1280")
    ap.add_argument("--no-crop", action="store_true",
                    help="give the model the whole frame, not just the ROI box")
    ap.add_argument("--port", type=int, default=WEB_PORT)
    ap.add_argument("--no-web", action="store_true")
    ap.add_argument("--display", action="store_true",
                    help="also open the old OpenCV debug window")
    args = ap.parse_args()

    SNAPSHOT_DIR.mkdir(parents=True, exist_ok=True)
    init_database()

    settings = load_settings()
    if args.conf is not None:
        settings["conf"] = args.conf
    if args.threshold is not None:
        settings["threshold"] = args.threshold
    if args.stream:
        settings["stream"] = args.stream
    if args.detect_size:
        settings["detect_size"] = args.detect_size
    if args.no_crop:
        settings["crop"] = False
    gg_view.clean_settings(settings)
    gg_model.clean_uploads(BASE_DIR)
    wanted = settings.get("model")
    gg_model.clean_settings(settings, BASE_DIR)
    model_path = args.model or str(BASE_DIR / settings["model"])

    engine = Engine(args.source, model_path, settings)
    if not args.model and wanted != settings["model"]:
        engine.model_note = (f"{gg_model.label(wanted)} is not installed, "
                             f"using {gg_model.label(settings['model'])}")
        save_settings(settings)

    print("=" * 64)
    print(" GARBAGE-GUARD")
    print("=" * 64)
    print(f" source     : {engine.view.url}  ({engine.view.active} stream)")
    print(f" detection  : {settings['detect_size']} px, "
          f"{'ROI box only' if settings['crop'] else 'whole frame'}")
    print(f" model      : {gg_model.label(engine.model_name)}  ({engine.model_path})")
```

```
    print(f" confidence : {settings['conf']}")
    print(f" threshold  : {settings['threshold']}  (re-arm {engine.counter.off})")
    print(f" roi points : {len(settings['roi'])}")
    if not args.no_web:
        print(f" dashboard  : http://localhost:{args.port}")
    print("=" * 64)

    if not args.no_web:
        # Start order matters: ups before screen and power (both read it), clock before buzzer (the
        # buzzer checks that the clock is synced).
        ups = gg_ups.Ups()
        save = lambda: save_settings(settings)
        screen = gg_screen.Screen(settings, save=save, ups=ups)
        clock = gg_clock.Clock()
        buzzer = gg_buzzer.Buzzer(settings, save=save, backend=gg_buzzer.make_backend(),
                                  clock_synced=clock.synced,
                                  alert_on=lambda: engine.alert_active and not engine.is_muted())
        power = gg_power.Power(settings, save=save, ups=ups, screen=screen,
                               log=engine.log_note, flush=gg_cloud.flush, sound=buzzer.play)
        engine.on_alert = screen.alert
        engine.on_event = buzzer.event
        touch = gg_touch.Touch(screen.touch)
        touch.start()
        screen.wake_source = touch
        screen.start()
        power.start()
        buzzer.start()
        buzzer.play("ready")
        gg_web.serve(engine, args.port, ups=ups, screen=screen, power=power,
                     buzzer=buzzer, clock=clock, clean=engine.clean)
        # Firebase sync for the app when the phone is not on the Pi's network.
        gg_cloud.start(note=gg_web.note_viewer)

    try:
        engine.run(show_window=args.display)
    except KeyboardInterrupt:
        print("\nStopped by user.")
        engine.stop_flag.set()
        engine.summary()


if __name__ == "__main__":
    main()
```

Listing K2. *gg_counter.py: ROI Test, Accumulation Counter and Display Numbers (Raspberry Pi 5)*

```
import time
from collections import Counter, deque
from dataclasses import dataclass
from statistics import median


# The ROI is stored normalised (0..1) so it survives a change of camera resolution. Fewer than three
# points means no ROI.
def scale_polygon(points, width, height):
    if not points or len(points) < 3:
        return None
    return [(x * width, y * height) for x, y in points]


# Ray casting. polygon None means no ROI, so every point counts as inside.
def point_in_polygon(x, y, polygon):
    if polygon is None:
        return True
    inside = False
    j = len(polygon) - 1
    for i in range(len(polygon)):
        xi, yi = polygon[i]
        xj, yj = polygon[j]
        if (yi > y) != (yj > y) and x < (xj - xi) * (y - yi) / (yj - yi) + xi:
            inside = not inside
        j = i
    return inside


# Tests the box centre only: an item half outside the ROI counts if its centre is inside. peak is
# the best confidence among counted boxes and goes on the snapshot card.
def tally(detections, polygon):
```

```
    counts = Counter()
    flags = []
    peak = 0.0
    for d in detections:
        x1, y1, x2, y2 = d["box"]
        inside = point_in_polygon((x1 + x2) / 2.0, (y1 + y2) / 2.0, polygon)
        flags.append(inside)
        if inside:
            counts[d["name"]] += 1
            peak = max(peak, d["conf"])
    return flags, counts, sum(counts.values()), peak


# Hysteresis. The alert clears at about 75% of the threshold (at least one below it), so a count
# hovering at the limit does not toggle the alert on and off.
def rearm_level(threshold):
    return max(0, threshold - max(1, threshold // 4))


# One Step per frame. alert and cleared are edges (true for one frame only); active is the level.
@dataclass
class Step:
    smoothed: int
    warming: bool
    active: bool = False
    alert: bool = False
    cleared: bool = False
    suppressed: dict = None


class AccumulationCounter:
    def __init__(self, threshold=20, window=15, cooldown=60.0, min_spike=3):
        self.window = window
        self.cooldown = cooldown
        self.min_spike = min_spike
        self.history = deque(maxlen=window)
        self.active = False
        self.last_alert = float("-inf")
        self._run = 0
        self._run_peak = 0
        self._run_passed = False
        self.set_threshold(threshold)

    def set_threshold(self, threshold):
        self.on = max(1, int(threshold))
        self.off = rearm_level(self.on)

    # warming: until the window is full the median is not trusted and no alert can fire. The
    # cooldown counts from the last alert, not from the last clear.
    def update(self, raw, now=None):
        now = time.time() if now is None else now
        self.history.append(int(raw))
        warming = len(self.history) < self.window
        smoothed = int(median(self.history))
        step = Step(smoothed=smoothed, warming=warming)
        step.suppressed = self._track_spike(int(raw), smoothed, warming)

        if not warming:
            if not self.active and smoothed >= self.on:
                if now - self.last_alert >= self.cooldown:
                    self.active = True
                    self.last_alert = now
                    step.alert = True
            elif self.active and smoothed <= self.off:
                self.active = False
                step.cleared = True

        step.active = self.active
        return step

    # Watches raw counts at or above the threshold. A run of min_spike frames or more that never
    # passed the smoothed threshold is reported once, as suppressed, when the run ends.
    def _track_spike(self, raw, smoothed, warming):
        if raw >= self.on:
            self._run += 1
            self._run_peak = max(self._run_peak, raw)
            if self.active or (smoothed >= self.on and not warming):
                self._run_passed = True
            return None

        result = None
```

```
        if self._run >= self.min_spike and not self._run_passed:
            result = {"frames": self._run, "peak": self._run_peak}
        self._run = 0
        self._run_peak = 0
        self._run_passed = False
        return result


class DisplayIds:
    """Turns ever-growing tracker IDs into small numbers that start at 1.

    A new object takes the lowest free number. Its number is released once it
    has been missing for `grace` frames, so brief flicker keeps the same label.
    """

    def __init__(self, grace=30):
        self.grace = grace
        self.frame = 0
        self.number = {}
        self.last_seen = {}

    def assign(self, track_ids):
        self.frame += 1
        for t in sorted({t for t in track_ids if t >= 0} - self.number.keys()):
            used = set(self.number.values())
            n = 1
            while n in used:
                n += 1
            self.number[t] = n
        for t in track_ids:
            if t >= 0:
                self.last_seen[t] = self.frame
        for t in [t for t, f in self.last_seen.items() if self.frame - f > self.grace]:
            del self.last_seen[t]
            del self.number[t]
        return [self.number[t] if t >= 0 else -1 for t in track_ids]

    def reset(self):
        self.number.clear()
        self.last_seen.clear()
```

Listing K3. *gg_view.py: Camera Stream Choice and Region Cropping (Raspberry Pi 5)*

```
"""Which camera stream to read, and which part of each frame the model sees.

The sub-stream (640x360) makes small or far items only a few pixels wide. The
main stream is read instead, and the model gets only the box around the ROI,
at `detect_size` pixels, so items in the water keep their detail. The picture
for the dashboard is scaled down to DISPLAY_W so the stream to the screen and
phones stays light. If the main stream gives no picture, the sub-stream is used.
"""

import re

import cv2

DEFAULTS = {"stream": "main", "detect_size": 960, "crop": True}
SIZES = (640, 960, 1280)
DISPLAY_W = 960
CROP_PAD = 0.04
MIN_CROP = 320
# Two openings of the main stream without a single frame and the reader falls back to the sub-
# stream; '[STREAM] Main stream gave no picture' in the log means this happened.
MAIN_TRIES = 2

_CHANNEL = re.compile(r"(/Streaming/Channels/\d*?)(\d)0(\d)\b", re.IGNORECASE)


def stream_urls(url):
    """Return (main, sub) RTSP addresses for a Hikvision channel URL.

    Channel 101 is the main stream and 102 the sub-stream. A URL that is not a
    Hikvision channel (a file, a webcam, another camera) is used as is for both.
    """
    url = str(url)
    m = _CHANNEL.search(url)
    if not m:
        return url, url
    main = url[:m.start()] + f"{m.group(1)}{m.group(2)}01" + url[m.end():]
    sub = url[:m.start()] + f"{m.group(1)}{m.group(2)}02" + url[m.end():]
```

```
    return main, sub


def clean_settings(s):
    s["stream"] = "sub" if s.get("stream") == "sub" else "main"
    try:
        size = int(s.get("detect_size", DEFAULTS["detect_size"]))
    except (TypeError, ValueError):
        size = DEFAULTS["detect_size"]
    s["detect_size"] = min(SIZES, key=lambda v: abs(v - size))
    s["crop"] = bool(s.get("crop", True))
    return s


# Returns None when the padded box would cover 95% or more of the frame; cropping would then only
# cost time.
def crop_box(polygon, width, height, pad=CROP_PAD, min_side=MIN_CROP):
    """Pixel box (x1, y1, x2, y2) around the ROI, padded and kept inside the frame.

    None means use the whole frame: no ROI, or the box would cover nearly all of it.
    """
    if not polygon or len(polygon) < 3:
        return None
    xs = [p[0] for p in polygon]
    ys = [p[1] for p in polygon]
    px, py = pad * width, pad * height
    x1, x2 = min(xs) - px, max(xs) + px
    y1, y2 = min(ys) - py, max(ys) + py
    x1, x2 = _grow(x1, x2, min(min_side, width), width)
    y1, y2 = _grow(y1, y2, min(min_side, height), height)
    box = (int(x1), int(y1), int(round(x2)), int(round(y2)))
    if (box[2] - box[0]) * (box[3] - box[1]) >= 0.95 * width * height:
        return None
    return box


def _grow(a, b, need, limit):
    a, b = max(0.0, a), min(float(limit), b)
    short = need - (b - a)
    if short > 0:
        a -= short / 2
        b += short / 2
        if a < 0:
            b, a = b - a, 0.0
        if b > limit:
            a, b = max(0.0, a - (b - limit)), float(limit)
    return a, b


def shift(box, dx, dy):
    x1, y1, x2, y2 = box
    return (x1 + dx, y1 + dy, x2 + dx, y2 + dy)


def scale_box(box, f):
    return tuple(v * f for v in box)


def for_display(frame, width=DISPLAY_W):
    """The frame scaled to the dashboard width, and the factor used."""
    h, w = frame.shape[:2]
    if w <= width:
        return frame.copy(), 1.0
    f = width / w
    return cv2.resize(frame, (width, int(round(h * f))), interpolation=cv2.INTER_AREA), f


class StreamChoice:
    """Keeps track of which stream is in use, and falls back to the sub-stream."""

    def __init__(self, source, wanted="main"):
        self.main, self.sub = stream_urls(source)
        self.split = self.main != self.sub
        self.wanted = wanted
        self.failed = 0
        self.note = ""

    @property
    def active(self):
        if not self.split or self.wanted == "sub" or self.failed >= MAIN_TRIES:
            return "sub"
```

```
        return "main"

    @property
    def url(self):
        return self.main if self.active == "main" else self.sub

    def want(self, wanted):
        self.wanted = "sub" if wanted == "sub" else "main"
        self.failed = 0
        self.note = ""

    def main_gave_nothing(self):
        if self.active != "main":
            return False
        self.failed += 1
        if self.failed >= MAIN_TRIES:
            self.note = "Main stream gave no picture, using the sub-stream"
            return True
        return False

    def fields(self):
        return {"stream": self.active, "stream_wanted": self.wanted,
                "stream_note": self.note}
```

Listing K4. *gg_web.py: Dashboard Web Server and API (Raspberry Pi 5)*

```
import ipaddress
import json
import os
import re
import socket
import sys
import threading
import time
from http.server import BaseHTTPRequestHandler, ThreadingHTTPServer
from pathlib import Path
from urllib.parse import parse_qs, urlparse

import gg_cloud
import gg_net
import gg_buzzer
import gg_clean
import gg_clock
import gg_model
import gg_power
import gg_screen
import gg_ups
import gg_window

BASE_DIR = Path(__file__).resolve().parent
# STREAM_FPS caps /stream.mjpg. SNAPSHOT_NAME whitelists file names so /snapshots/ cannot be used to
# read any other file on the Pi.
STREAM_FPS = 12
SNAPSHOT_NAME = re.compile(r"^[A-Za-z0-9_.-]+\.jpg$")
THUMB_PX = 160
THUMB_KEEP = 400

_thumbs = {}
_thumbs_lock = threading.Lock()


def square_thumb(path, card=True):
    """A small square JPEG cut from the middle of a snapshot, for history rows.

    `card` drops the info strip that annotated snapshots carry under the
    photo, so the thumbnail shows the water and not the strip. Clean copies
    have no strip. Kept in memory by file and modification time, so
    scrolling back up the history does not decode the full picture again.
    """
    import cv2
    import numpy as np
    key = (str(path), path.stat().st_mtime_ns, card)
    with _thumbs_lock:
        if key in _thumbs:
            return _thumbs[key]
    img = cv2.imdecode(np.fromfile(str(path), np.uint8), cv2.IMREAD_COLOR)
    if img is None:
        return None
    h, w = img.shape[:2]
    if card:
```

```
        import gg_snapcard
        strip = gg_snapcard.card_height(w)
        if h - strip >= w // 2:
            img, h = img[:h - strip], h - strip
    side = min(h, w)
    y, x = (h - side) // 2, (w - side) // 2
    img = cv2.resize(img[y:y + side, x:x + side], (THUMB_PX, THUMB_PX),
                     interpolation=cv2.INTER_AREA)
    ok, buf = cv2.imencode(".jpg", img, [cv2.IMWRITE_JPEG_QUALITY, 75])
    if not ok:
        return None
    jpg = buf.tobytes()
    with _thumbs_lock:
        if len(_thumbs) >= THUMB_KEEP:
            _thumbs.pop(next(iter(_thumbs)))
        _thumbs[key] = jpg
    return jpg


LOOPBACK = ("127.0.0.1", "::1", "::ffff:127.0.0.1")
VIEWER_TTL = 4.0

_viewers = {}
_viewers_lock = threading.Lock()
_names = {}

UA_ANDROID = re.compile(r"Android ([\d.]+)(?:; ([^;)]+?))?(?: Build/|\)|;)")
UA_IOS = re.compile(r"(iPhone|iPad).*?OS ([\d_]+)")


def client_kind(headers):
    tag = (headers.get("X-GG-Client") or "").lower()
    if tag:
        return "app" if tag in ("android", "app", "mobile", "ios") else "browser"
    ua = headers.get("User-Agent") or ""
    return "app" if ("Dalvik" in ua or "okhttp" in ua) else "browser"


def describe_ua(ua):
    ua = ua or ""
    os_name, model, browser = None, None, None
    m = UA_ANDROID.search(ua)
    if m:
        os_name = "Android " + m.group(1)
        if m.group(2) and m.group(2).strip() not in ("K", "U", "wv"):
            model = m.group(2).strip()
    elif UA_IOS.search(ua):
        m = UA_IOS.search(ua)
        os_name, model = "iOS " + m.group(2).replace("_", "."), m.group(1)
    elif "Windows" in ua:
        os_name = "Windows"
    elif "Mac OS X" in ua:
        os_name = "macOS"
    elif "Linux" in ua:
        os_name = "Linux"
    for key, name in (("Edg/", "Edge"), ("Firefox/", "Firefox"), ("Chrome/", "Chrome"),
                      ("Safari/", "Safari"), ("Dalvik", "Android app")):
        if key in ua:
            browser = name
            break
    return os_name, model, browser


TAILNET = ipaddress.ip_network("100.64.0.0/10")


def link_kind(ip):
    """How a client reaches the Pi, judged from its address alone."""
    try:
        a = ipaddress.ip_address(ip.replace("::ffff:", ""))
    except ValueError:
        return "remote"
    if a.version == 4 and a in TAILNET:
        return "remote"
    if a.is_private or a.is_link_local:
        return "local"
    return "remote"


def mac_for(ip):
    try:
```

```
        with open("/proc/net/arp") as f:
            for line in f.read().splitlines()[1:]:
                parts = line.split()
                if parts and parts[0] == ip and parts[3] != "00:00:00:00:00:00":
                    return parts[3].upper()
    except OSError:
        pass
    return None


def _lookup_name(ip):
    try:
        name = socket.gethostbyaddr(ip)[0]
    except OSError:
        name = None
    _names[ip] = (name, time.time())


def hostname_for(ip):
    hit = _names.get(ip)
    if hit is None or time.time() - hit[1] > 600:
        _names[ip] = (hit[0] if hit else None, time.time())
        threading.Thread(target=_lookup_name, args=(ip,), daemon=True).start()
    return _names[ip][0]


# Remembers each phone or browser that polled /api/state within VIEWER_TTL seconds. The app sends
# X-GG-Client-Id so two phones behind one IP still count as two viewers.
def note_viewer(ip, kind, now=None, headers=None):
    now = time.time() if now is None else now
    headers = headers or {}
    cid = (headers.get("X-GG-Client-Id") or "")[:64]
    key = cid or f"{ip}|{kind}"
    with _viewers_lock:
        row = _viewers.get(key)
        if row is None or now - row["seen"] > VIEWER_TTL:
            row = {"since": now, "hits": 0}
            _viewers[key] = row
        row.update(ip=ip, kind=kind, seen=now, id=cid or None)
        row["hits"] += 1
        for field, name in (("X-GG-Device", "device"), ("X-GG-OS", "os"), ("X-GG-App-Version",
"app_version"),
                            ("X-GG-Mode", "mode"), ("User-Agent", "ua")):
            if headers.get(field):
                row[name] = str(headers.get(field))[:160]


def forget_viewer(ip, kind, cid=None):
    with _viewers_lock:
        _viewers.pop(cid or f"{ip}|{kind}", None)


def viewers(now=None):
    now = time.time() if now is None else now
    with _viewers_lock:
        for k in [k for k, r in _viewers.items() if now - r["seen"] > VIEWER_TTL]:
            del _viewers[k]
        rows = []
        for r in sorted(_viewers.values(), key=lambda r: (r["kind"] != "app", r["since"])):
            os_name, model, browser = describe_ua(r.get("ua"))
            rows.append({"ip": r["ip"], "kind": r["kind"], "id": r.get("id"),
                         "device": r.get("device") or model, "os": r.get("os") or os_name,
                         "browser": None if r["kind"] == "app" else browser,
                         "app_version": r.get("app_version"), "mode": r.get("mode"),
                         "since_s": int(now - r["since"]), "age_s": round(now - r["seen"], 1),
                         "hits": r["hits"], "ua": r.get("ua")})
    shared = {}
    for row in rows:
        shared[row["ip"]] = shared.get(row["ip"], 0) + 1
    for row in rows:
        kind = link_kind(row["ip"])
        if row["ip"] == "Firebase":
            row["via"], row["mac"] = "cloud", None
        elif kind == "remote":
            row["via"], row["mac"] = "remote", None
        else:
            row["via"] = "shared" if shared[row["ip"]] > 1 else "direct"
            row["mac"] = mac_for(row["ip"])
        row["hostname"] = None if row["via"] == "cloud" else hostname_for(row["ip"])
    return {"apps": sum(r["kind"] == "app" for r in rows),
            "browsers": sum(r["kind"] == "browser" for r in rows), "list": rows}
```

```
216
217
218 # Every collaborator is optional so test_web.py can build a handler around a fake engine; missing
219 # ones get safe stand-ins (FakeBackend for the buzzer).
220 def make_handler(engine, net=None, ups=None, screen=None, power=None, clock=None, buzzer=None,
221                  clean=None):
222     net = net or gg_net.make_net()
223     ups = ups or gg_ups.Ups()
224     screen = screen or gg_screen.Screen(engine.settings, ups=ups)
225     power = power or gg_power.Power(engine.settings, ups=ups, screen=screen)
226     clock = clock or gg_clock.Clock()
227     buzzer = buzzer or gg_buzzer.Buzzer(engine.settings, backend=gg_buzzer.FakeBackend())
228     clean = clean or getattr(engine, "clean", None) or gg_clean.Clean(
229         engine.settings, getattr(engine, "snapshot_dir", "snapshots"))
230
231     class Handler(BaseHTTPRequestHandler):
232         # Keep-alive, so the once-a-second polling from each phone reuses one connection.
233         protocol_version = "HTTP/1.1"
234
235         # Silenced: one access line per poll would drown out the [ALERT] and [CLEAR] lines.
236         def log_message(self, *args):
237             pass
238
239         def _send(self, code, ctype, body, extra=None):
240             if isinstance(body, str):
241                 body = body.encode("utf-8")
242             self.send_response(code)
243             self.send_header("Content-Type", ctype)
244             self.send_header("Content-Length", str(len(body)))
245             if "Cache-Control" not in (extra or {}):
246                 self.send_header("Cache-Control", "no-store")
247             for k, v in (extra or {}).items():
248                 self.send_header(k, v)
249             self.end_headers()
250             try:
251                 self.wfile.write(body)
252             except (BrokenPipeError, ConnectionResetError):
253                 pass
254
255         def _json(self, obj, code=200):
256             self._send(code, "application/json", json.dumps(obj))
257
258         def _body(self):
259             n = int(self.headers.get("Content-Length") or 0)
260             if not n:
261                 return {}
262             try:
263                 return json.loads(self.rfile.read(n) or b"{}")
264             except json.JSONDecodeError:
265                 return {}
266
267         # Wi-Fi and Firebase settings are accepted only from the Pi itself (loopback). Phones get
268         # 403 local_only.
269         def _local(self):
270             if self.client_address[0] in LOOPBACK:
271                 return True
272             self._json({"ok": False, "error": "local_only",
273                         "message": "Wi-Fi can only be changed on the Pi's own screen."}, 403)
274             return False
275
276         def do_GET(self):
277             path = urlparse(self.path).path
278             query = parse_qs(urlparse(self.path).query)
279
280             if path in ("/start", "/wifi"):
281                 f = BASE_DIR / "wifi.html"
282                 if not f.is_file():
283                     return self._send(404, "text/plain", "wifi.html missing")
284                 return self._send(200, "text/html; charset=utf-8", f.read_bytes())
285
286             if path == "/api/net":
287                 st = dict(net.status())
288                 st["local"] = self.client_address[0] in LOOPBACK
289                 return self._json(st)
290
291             if path == "/api/net/details":
292                 d = net.details()
293                 d["local"] = self.client_address[0] in LOOPBACK
294                 return self._json(d)
295
296             if path == "/api/cloud":
```

```
                if not self._local():
                    return
                return self._json(gg_cloud.public_config())

            if path == "/api/wifi/scan":
                if not self._local():
                    return
                return self._json(net.scan(rescan=(query.get("rescan") or ["1"])[0] != "0"))

            if path in ("/", "/index.html"):
                f = BASE_DIR / "dashboard.html"
                if not f.is_file():
                    return self._send(404, "text/plain", "dashboard.html missing")
                return self._send(200, "text/html; charset=utf-8", f.read_bytes())

            if path == "/api/battery":
                return self._json({**ups.status(), **power.fields()})

            # Polled every second by the dashboard and the app. Also records who is watching, for
            # the phone icon on the Pi screen.
            if path == "/api/state":
                ip = self.client_address[0]
                if ip not in LOOPBACK:
                    note_viewer(ip, client_kind(self.headers), headers=self.headers)
                st = engine.snapshot_state()
                st["viewers"] = viewers()
                if hasattr(engine, "alerts_total"):
                    st["alerts_total"] = engine.alerts_total()
                st.update(screen.fields())
                st.update(clock.fields())
                st.update(buzzer.fields())
                st.update(clean.fields())
                st["cloud"] = {k: gg_cloud.STATUS.get(k)
                               for k in ("enabled", "ok", "error", "watchers", "usage")}
                return self._json(st)

            if path == "/api/alerts":
                limit = int((query.get("limit") or [50])[0])
                sig = engine.alerts_sig() if hasattr(engine, "alerts_sig") else None
                if sig is not None and (query.get("sig") or [None])[0] == sig:
                    return self._json({"same": True, "sig": sig})
                out = {"alerts": engine.recent_alerts(limit), "sig": sig}
                if hasattr(engine, "alerts_total"):
                    out["total"] = engine.alerts_total()
                return self._json(out)

            # 503 until the engine has encoded its first frame; normal for a few seconds after
            # start.
            if path == "/frame.jpg":
                jpg = engine.get_jpeg()
                if jpg is None:
                    return self._send(503, "text/plain", "no frame yet")
                return self._send(200, "image/jpeg", jpg)

            if path == "/stream.mjpg":
                return self._stream()

            thumb = (query.get("thumb") or ["0"])[0] == "1"
            if path.startswith("/snapshots/clean/"):
                return self._snapshot(path[len("/snapshots/clean/"):], gg_clean.FOLDER, thumb)

            if path.startswith("/snapshots/"):
                return self._snapshot(path[len("/snapshots/"):], thumb=thumb)

            return self._send(404, "text/plain", "not found")

        def _refuse_upload(self, code, error, message):
            # The body was not read, so this connection cannot carry another request.
            self.close_connection = True
            self._send(code, "application/json",
                       json.dumps({"ok": False, "error": error, "message": message}),
                       {"Connection": "close"})

        def _model_upload(self):
            if not hasattr(engine, "upload_model"):
                return self._refuse_upload(404, "unavailable", "Model upload is not available.")
            try:
                n = int(self.headers.get("Content-Length") or -1)
            except ValueError:
                n = -1
            if n <= 0 or n > gg_model.MAX_UPLOAD:
```

```
                return self._refuse_upload(
                    413, "too_large",
                    f"Send the .zip with a Content-Length of at most {gg_model.MAX_UPLOAD // (1024 * 1024)} MB.")
            ctype = (self.headers.get("Content-Type") or "").split(";")[0].strip().lower()
            if ctype.startswith("multipart/") or ctype == "application/json":
                return self._refuse_upload(415, "bad_type",
                                           "Send the .zip itself as the request body, not a form.")
            version = (parse_qs(urlparse(self.path).query).get("version") or [""])[0]
            body = _Counted(self.rfile)
            code, res = engine.upload_model(version, body, n)
            if body.got < n and not body.ended:
                # A refusal before the whole zip arrived (bad or taken version name):
                # read the rest so the phone or browser gets the reply, not a reset.
                body.drain(n - body.got)
            if code == 200 and res.get("ok"):
                buzzer.play("saved")
            return self._json(res, code)

        def do_POST(self):
            path = urlparse(self.path).path
            if path == "/api/model/upload":
                return self._model_upload()
            data = self._body()

            if path == "/api/wifi/connect":
                if not self._local():
                    return
                res = net.connect(str(data.get("ssid") or ""), data.get("password") or None,
                                  bool(data.get("hidden")))
                buzzer.play("wifi_ok" if res.get("ok") else "wifi_fail")
                return self._json(res)

            if path == "/api/net/ipv4":
                if not self._local():
                    return
                return self._json(net.set_ipv4(str(data.get("connection") or ""), data))

            if path == "/api/cloud":
                if not self._local():
                    return
                return self._json(cloud_settings(data))

            if path == "/api/cloud/restore":
                if not self._local():
                    return
                try:
                    good = json.loads(gg_cloud.GOOD.read_text())
                except (OSError, ValueError):
                    return self._json({"ok": False, "message": "No working settings have been saved yet."})
                gg_cloud.save_config(good)
                gg_cloud.start()
                return self._json({"ok": True, "message": "Restored the last working Firebase settings."})

            if path == "/api/wifi/fix_camera":
                if not self._local():
                    return
                return self._json(net.fix_camera_route())

            if path == "/api/client/bye":
                forget_viewer(self.client_address[0], client_kind(self.headers),
                              self.headers.get("X-GG-Client-Id"))
                return self._json({"ok": True})

            if path == "/api/camera/reconnect":
                engine.reconnect("button")
                threading.Thread(target=net.camera_up, daemon=True).start()
                return self._json({"ok": True})

            if path == "/api/restart":
                self._json({"ok": True})
                threading.Thread(target=restart_process, daemon=True).start()
                return

            if path == "/api/window":
                # Only the Pi's own screen may hide its window.
                if self.client_address[0] not in LOOPBACK:
                    return self._json({"ok": False, "error": "local_only"}, 403)
                if data.get("mode") == "mini":
                    return self._json(gg_window.minimize())
                return self._json(gg_window.restore())
```

```
458
459             # conf may arrive as a percentage (40) or a fraction (0.40); anything above 1 is read as
460             # a percentage.
461             if path == "/api/settings":
462                 conf = data.get("conf")
463                 if conf is not None and float(conf) > 1:
464                     conf = float(conf) / 100.0
465                 s = engine.update_settings(conf=conf,
466                                            threshold=data.get("threshold"))
467                 buzzer.play("saved")
468                 return self._json({"ok": True, "settings": s})
469
470             if path == "/api/labels":
471                 if not hasattr(engine, "set_labels"):
472                     return self._json({"ok": False, "error": "Box labels are not available."})
473                 labels = engine.set_labels(data)
474                 buzzer.play("saved")
475                 return self._json({"ok": True, "labels": labels})
476
477             if path == "/api/view":
478                 size = data.get("detect_size")
479                 crop = data.get("crop")
480                 out = engine.set_view(stream=data.get("stream"),
481                                       detect_size=int(size) if size is not None else None,
482                                       crop=bool(crop) if crop is not None else None)
483                 buzzer.play("saved")
484                 return self._json({"ok": True, **out})
485
486             if path == "/api/model":
487                 if not hasattr(engine, "set_model"):
488                     return self._json({"ok": False, "error": "Model switching is not available."})
489                 res = engine.set_model(data.get("model"))
490                 if res.get("ok"):
491                     buzzer.play("saved")
492                 return self._json(res)
493
494             if path == "/api/roi":
495                 pts = engine.set_roi(data.get("points"))
496                 return self._json({"ok": True, "points": pts})
497
498             if path == "/api/test_alert":
499                 engine.fire_test_alert()
500                 return self._json({"ok": True})
501
502             if path == "/api/capture":
503                 saved = engine.capture_snapshot()
504                 return self._json({"ok": saved})
505
506             if path == "/api/mute":
507                 res = engine.set_mute(seconds=data.get("seconds"),
508                                       cancel=bool(data.get("cancel")))
509                 return self._json({"ok": True, **res})
510
511             if path == "/api/auto_mute":
512                 on = data.get("on")
513                 secs = data.get("seconds")
514                 res = engine.set_auto_mute(on=None if on is None else bool(on),
515                                            seconds=None if secs is None else int(secs))
516                 return self._json({"ok": True, **res})
517
518             if path == "/api/screen_saver":
519                 res = screen.configure(mode=data.get("mode"), timeout_s=data.get("timeout_s"),
520                                        timeout_battery_s=data.get("timeout_battery_s"),
521                                        dim_pct=data.get("dim_pct"),
522                                        wake_on_alert=data.get("wake_on_alert"))
523                 buzzer.play("saved")
524                 return self._json({"ok": True, **res})
525
526             if path == "/api/screen":
527                 action = data.get("action")
528                 if action == "wake":
529                     screen.wake()
530                 elif action == "sleep":
531                     screen.sleep()
532                 else:
533                     return self._json({"ok": False, "error": "bad_action"}, 400)
534                 return self._json({"ok": True, "screen": screen.state})
535
536             if path == "/api/screen/touch":
537                 if self.client_address[0] not in LOOPBACK:
538                     return self._json({"ok": False, "error": "local_only"}, 403)
```

```
                return self._json({"ok": True, "screen": screen.touch()})

            if path == "/api/auto_shutdown":
                if data.get("cancel"):
                    res = power.cancel()
                    return self._json(res, 200 if res.get("ok") else 409)
                on, pct = data.get("on"), data.get("pct")
                res = power.configure(on=None if on is None else bool(on), pct=pct)
                return self._json({"ok": True, **res})

            if path == "/api/buzzer":
                res = buzzer.configure(on=data.get("on"), volume=data.get("volume"),
                                       alerts=data.get("alerts"), countdown=data.get("countdown"),
                                       ui=data.get("ui"), repeat=data.get("repeat"),
                                       repeat_s=data.get("repeat_s"), quiet_on=data.get("quiet_on"),
                                       quiet_from=data.get("quiet_from"), quiet_to=data.get("quiet_to"))
                buzzer.play("saved")
                return self._json({"ok": True, **res})

            if path == "/api/buzzer/test":
                name = data.get("sound")
                if name not in gg_buzzer.SOUNDS:
                    return self._json({"ok": False, "error": "bad_sound"}, 400)
                if not buzzer.test(name):
                    return self._json({"ok": False, "error": "unavailable",
                                       "message": buzzer.fields()["buzzer_note"]}, 409)
                return self._json({"ok": True})

            if path == "/api/clean":
                mode = data.get("mode")
                if mode not in gg_clean.MODES:
                    return self._json({"ok": False, "error": "bad_mode"}, 400)
                res = clean.configure(mode=mode)
                buzzer.play("saved")
                return self._json({"ok": True, **res})

            if path == "/api/buzzer/ui":
                if self.client_address[0] not in LOOPBACK:
                    return self._json({"ok": False, "error": "local_only"}, 403)
                return self._json({"ok": True, "played": buzzer.ui(data.get("sound"))})

            # Needs confirm:true in the body so a stray request can never power the Pi off.
            if path == "/api/shutdown":
                if not data.get("confirm"):
                    return self._json({"ok": False, "error": "confirm_required"}, 400)
                res = power.manual_shutdown()
                return self._json(res, 200 if res.get("ok") else 500)

            if path == "/api/alerts/read":
                ids = data.get("ids")
                res = engine.mark_read(
                    ids=ids if isinstance(ids, list) else None,
                    every=bool(data.get("all")),
                    read=data.get("read", True) is not False,
                )
                return self._json({"ok": True, **res})

            # ids, all, and a from/to date range can be combined; see Engine.delete_alerts().
            if path == "/api/alerts/delete":
                ids = data.get("ids")
                res = engine.delete_alerts(
                    ids=ids if isinstance(ids, list) else None,
                    every=bool(data.get("all")),
                    dfrom=data.get("from") or None,
                    dto=data.get("to") or None,
                )
                return self._json({"ok": True, **res})

            return self._send(404, "text/plain", "not found")

        # The name pattern and the parent check keep ../ tricks from reaching files outside the
        # snapshot folder.
        def _snapshot(self, name, sub=None, thumb=False):
            if not SNAPSHOT_NAME.match(name):
                return self._send(404, "text/plain", "not found")
            folder = Path(engine.snapshot_dir).resolve()
            if sub:
                folder = folder / sub
            target = (folder / name).resolve()
            if target.parent != folder or not target.is_file():
                return self._send(404, "text/plain", "not found")
```

```
            if thumb:
                jpg = square_thumb(target, card=not sub)
                if jpg is None:
                    return self._send(404, "text/plain", "not found")
                return self._send(200, "image/jpeg", jpg,
                                  {"Cache-Control": "max-age=86400"})
            return self._send(200, "image/jpeg", target.read_bytes())

        # MJPEG for browsers. A frame is sent only when the engine has a new one (identity check),
        # at most STREAM_FPS times a second.
        def _stream(self):
            self.send_response(200)
            self.send_header("Age", "0")
            self.send_header("Cache-Control", "no-cache, private")
            self.send_header("Pragma", "no-cache")
            self.send_header("Content-Type",
                             "multipart/x-mixed-replace; boundary=ggframe")
            self.end_headers()
            last = None
            try:
                while True:
                    jpg = engine.get_jpeg()
                    if jpg is not None and jpg is not last:
                        last = jpg
                        self.wfile.write(b"--ggframe\r\n")
                        self.wfile.write(b"Content-Type: image/jpeg\r\n")
                        self.wfile.write(
                            f"Content-Length: {len(jpg)}\r\n\r\n".encode())
                        self.wfile.write(jpg)
                        self.wfile.write(b"\r\n")
                    time.sleep(1.0 / STREAM_FPS)
            except (BrokenPipeError, ConnectionResetError):
                pass

    return Handler


class _Counted:
    """Wraps the request body so the handler knows how much of it was read."""

    def __init__(self, stream):
        self.stream, self.got, self.ended = stream, 0, False

    def read(self, n):
        chunk = self.stream.read(n)
        if not chunk:
            self.ended = True
        self.got += len(chunk)
        return chunk

    def drain(self, left):
        while left > 0 and not self.ended:
            left -= len(self.read(min(gg_model.CHUNK, left)))


# A phone leaving mid-response raises broken-pipe errors. Those are expected and not printed.
class QuietServer(ThreadingHTTPServer):
    def handle_error(self, request, client_address):
        err = sys.exc_info()[1]
        if isinstance(err, (BrokenPipeError, ConnectionResetError, ConnectionAbortedError)):
            return
        super().handle_error(request, client_address)


def cloud_settings(data):
    old = gg_cloud.load_config() or {}
    cfg = {k: str(data.get(k) or "").strip() for k in ("database_url", "api_key", "email")}
    cfg["password"] = data.get("password") or old.get("password") or ""
    cfg["enabled"] = bool(data.get("enabled", True))
    if not cfg["enabled"]:
        gg_cloud.save_config(dict(old, enabled=False) if old else cfg)
        gg_cloud.start()
        return {"ok": True, "message": "Firebase sync is off. The app still works on the same Wi-Fi."}
    res = gg_cloud.test_config(cfg)
    if res.get("ok") and not data.get("test_only"):
        gg_cloud.save_config(cfg, good=True)
        gg_cloud.start()
        res["message"] = "Saved and connected. These are now the working settings."
    elif not res.get("ok") and data.get("save_anyway"):
        gg_cloud.save_config(cfg)
        gg_cloud.start()
```

```
        res["saved"] = True
    return res


# /api/restart. Re-executes this process in place with the same arguments (os.execv), so no service
# manager is needed.
def restart_process(delay=0.6):
    time.sleep(delay)
    print("Restarting Garbage-Guard from the dashboard.", flush=True)
    os.execv(sys.executable, [sys.executable] + sys.argv)


# Binds all interfaces so phones on the same network reach port 8080. Runs in a daemon thread beside
# the detection loop.
def serve(engine, port=8080, ups=None, screen=None, power=None, buzzer=None, clock=None,
          clean=None):
    server = QuietServer(("0.0.0.0", port), make_handler(engine, ups=ups, screen=screen, power=power,
                                                         buzzer=buzzer, clock=clock,
                                                         clean=clean))
    server.daemon_threads = True
    threading.Thread(target=server.serve_forever, daemon=True).start()
    return server
```

Listing K5. *dashboard.html: Touchscreen and Browser Dashboard with Its CSS and JavaScript (Raspberry Pi 5)*

```
<!DOCTYPE html>
<html lang="en" data-theme="light">
<head>
<meta charset="utf-8">
<meta name="viewport" content="width=device-width, initial-scale=1, viewport-fit=cover">
<title>Garbage-Guard</title>
<!-- Both themes live here. data-theme on <html> switches the palette; the dark values are under
     [data-theme="dark"]. -->
<style>
:root{
  --base:#DED4C8; --base2:#E9E1D6; --raised:#EFE8DE; --sunk:#D0C4B5;
  --shade:#A28F78; --lite:#FFFFFF;
  --text:#16130F; --muted:#6A6054; --edge:#16130F;
  --teal:#128C84; --teal-lt:#2FB3A8;
  --ok:#2F9E44; --warn:#E8A317; --bad:#D92D20;
  --ok-tint:#CDE9D4; --warn-tint:#F7E3B8; --bad-tint:#F4C8C3;
  --hard:5px 5px 0 var(--edge); --hard-sm:4px 4px 0 var(--edge);
  --soft:9px 9px 16px var(--shade), -6px -6px 13px var(--lite);
  --soft-sm:4px 4px 8px var(--shade), -3px -3px 7px var(--lite);
  --press:inset 6px 6px 12px var(--shade), inset -5px -5px 10px var(--lite);
  --well:inset 6px 6px 11px var(--shade), inset -4px -4px 9px var(--lite);
  --gap:9px;
  --purple:#7C4DBA; --purple-tint:#E4D9F4; --indigo:#4757B8; --orange:#E8590C; --slate:#5E6B73;
  --c-bottle:#0F7BD4; --c-bag:#A32BC9; --c-cont:#1E9E4A; --amber:#B7791F; --violet:#7B3FB5;
  /* The GUARD chip is filled with --text, so a --edge shadow under it is the
     same colour as the chip and vanishes in light mode. Teal separates it.
     Dark mode keeps the black shadow, which already reads against the pale
     chip and beats teal there on contrast. */
  --chip-sh:var(--teal);
  /* Live feed housing. Light mode keeps the dark monitor for contrast against
     the pale page; dark mode flips it to a pale casing for the same reason.
     The screen and LCD stay black glass in both so it still reads as a TV. */
  --mon-bg:linear-gradient(172deg,#4E4740 0%,#2C2621 46%,#1F1A16 100%);
  --mon-ink:#EDE6DC; --mon-engr:#C9BFB2; --mon-hint:#BDB3A7; --mon-fps:#8FE0CF;
  --mon-emboss:0 -1px 0 rgba(0,0,0,.6), 0 1px 0 rgba(255,255,255,.07);
  --mon-rim:inset 0 2px 0 rgba(255,255,255,.16), inset 0 -3px 0 rgba(0,0,0,.35);
  --hw-bg:linear-gradient(180deg,#5C554D,#36302A); --hw-ink:#EDE6DC;
  --hw-hi:inset 0 1px 0 rgba(255,255,255,.22);
  --mon-well:#1E1A16; --mon-well-ink:#EDE6DC;
  --mon-ok:#6EDC8C; --mon-warn:#F5C04A; --mon-bad:#FF7A6E;
  color-scheme:light;
}
[data-theme="dark"]{
  --base:#1F1C19; --base2:#2A2622; --raised:#332E29; --sunk:#1A1714;
  --shade:#000000; --lite:#5A5047;
  --text:#F2EBE1; --muted:#A79B8C; --edge:#090807;
  --teal:#16A79C; --teal-lt:#3ED0C4;
  --ok:#4ECB71; --warn:#F0B429; --bad:#FF6B5E;
  --ok-tint:#1E3B27; --warn-tint:#453213; --bad-tint:#4A211C;
  --purple:#B48CF0; --purple-tint:#33264A; --indigo:#8C9BF5; --orange:#FF8A3D; --slate:#9AA8B0;
  --c-bottle:#5AA9F0; --c-bag:#D07BEF; --c-cont:#5BD487; --amber:#F2B65A; --violet:#B98AF0;
  --chip-sh:var(--edge);
  --mon-bg:linear-gradient(172deg,#F4EFE7 0%,#D9D1C5 48%,#BDB3A5 100%);
```

```
  --mon-ink:#1E1A16; --mon-engr:#3B342D; --mon-hint:#5A5148; --mon-fps:#0B7A70;
  --mon-emboss:0 1px 0 rgba(255,255,255,.65), 0 -1px 0 rgba(0,0,0,.12);
  --mon-rim:inset 0 2px 0 rgba(255,255,255,.85), inset 0 -3px 0 rgba(0,0,0,.18);
  --hw-bg:linear-gradient(180deg,#FFFDF9,#DCD4C8); --hw-ink:#1E1A16;
  --hw-hi:inset 0 1px 0 #fff;
  --mon-well:#ECE6DC; --mon-well-ink:#1E1A16;
  --mon-ok:#1F7A33; --mon-warn:#8A5A00; --mon-bad:#C0261B;
  color-scheme:dark;
}
*{box-sizing:border-box;-webkit-tap-highlight-color:transparent}
/* Kiosk touches: a long press should not pop a text selection handle, and a
   swipe past the end should not bounce the whole page. */
body{-webkit-user-select:none;user-select:none;overscroll-behavior:none}
input,.tablewrap,.vm,#cfmText{-webkit-user-select:text;user-select:text}
html,body{height:100%;margin:0;overflow:hidden}
body{
  font-family:system-ui,-apple-system,"Segoe UI","DejaVu Sans",Roboto,sans-serif;
  color:var(--text);font-size:13px;line-height:1.25;
  background:
    radial-gradient(120% 90% at 8% 0%, var(--base2) 0%, transparent 60%),
    radial-gradient(110% 80% at 100% 100%, var(--base2) 0%, transparent 55%),
    var(--base);
  display:flex;flex-direction:column;padding:7px;gap:var(--gap);
}
button,input{font:inherit;color:inherit}
:focus-visible{outline:3px solid var(--teal);outline-offset:2px}
@media (prefers-reduced-motion:reduce){*{animation:none!important;transition:none!important}}

.ico{width:17px;height:17px;flex:none;display:block;overflow:visible}

/* ---------------- buttons ---------------- */
.btn{position:relative;display:inline-flex;align-items:center;justify-content:center;
  gap:6px;border:2px solid var(--edge);border-radius:10px;
  background:linear-gradient(162deg, var(--lite) 0%, var(--raised) 58%);
  padding:5px 10px;min-height:36px;font-weight:800;font-size:13px;cursor:pointer;
  box-shadow:var(--hard-sm), var(--soft-sm);
  transition:transform .09s ease, box-shadow .09s ease, background .12s ease}
.btn:hover{background:linear-gradient(162deg, var(--lite) 0%, var(--base2) 70%)}
.btn:active{transform:translate(3px,3px);box-shadow:var(--press);background:var(--sunk)}
.btn.teal{background:linear-gradient(162deg, var(--teal-lt) 0%, var(--teal) 62%);color:#fff;
  border-color:var(--edge)}
.btn.bad{background:var(--bad);color:#fff;border-color:var(--edge)}
.btn.ink{background:linear-gradient(162deg, #45413B 0%, var(--text) 62%);color:var(--base)}
[data-theme="dark"] .btn.ink{background:linear-gradient(162deg,#FFF 0%, var(--text) 62%)}
.btn.teal:active,.btn.ink:active{filter:brightness(.9)}
.btn.sm{min-height:30px;padding:5px 9px;font-size:12px;border-radius:9px;gap:5px;
  box-shadow:2px 2px 0 var(--edge), var(--soft-sm)}
.btn.sm .ico{width:14px;height:14px}
.btn.danger{background:linear-gradient(162deg,#FF8A7E 0%, var(--bad) 62%);color:#fff}
.btn:disabled{opacity:.4;cursor:not-allowed;box-shadow:var(--hard-sm)}
/* the .btn display rule beats the hidden attribute, so restore it */
.btn[hidden]{display:none}
.btn:disabled .ico{animation:none!important}

.ico{transition:transform .12s ease;transform-origin:center}
.btn:hover .a-spin   {animation:spin 1.1s linear infinite}
.btn:hover .a-right  {animation:nudgeR .7s ease-in-out infinite}
.btn:hover .a-left   {animation:nudgeL .7s ease-in-out infinite}
.btn:hover .a-ring   {animation:ring .55s ease-in-out infinite}
.btn:hover .a-pop    {animation:pop .7s ease-in-out infinite}
.btn:hover .a-shake  {animation:shake .6s ease-in-out infinite}
.btn:hover .a-shutter{animation:shutter .9s ease-in-out infinite}
.btn:hover .a-tilt   {animation:tilt .8s ease-in-out infinite}
.btn:active .ico{transform:scale(.86)}
@keyframes tilt{0%,100%{transform:rotate(0)}50%{transform:rotate(-14deg)}}

@keyframes spin{to{transform:rotate(360deg)}}
@keyframes nudgeR{0%,100%{transform:translateX(0)}50%{transform:translateX(3px)}}
@keyframes nudgeL{0%,100%{transform:translateX(0)}50%{transform:translateX(-3px)}}
@keyframes ring{0%,100%{transform:rotate(0)}25%{transform:rotate(13deg)}75%{transform:rotate(-13deg)}}
@keyframes pop{0%,100%{transform:scale(1)}50%{transform:scale(1.18)}}
@keyframes march{to{stroke-dashoffset:-14}}
@keyframes shutter{0%,100%{transform:scale(1)}50%{transform:scale(.72)}}
@keyframes pulse{0%,100%{opacity:1;transform:scale(1)}50%{opacity:.45;transform:scale(.84)}}
@keyframes breathe{0%,100%{opacity:.85}50%{opacity:.35}}
@keyframes shake{0%,100%{transform:translateX(0)}20%{transform:translateX(-2px)}
  40%{transform:translateX(2px)}60%{transform:translateX(-2px)}80%{transform:translateX(2px)}}
@keyframes sweep{0%{transform:translateX(-120%)}100%{transform:translateX(320%)}}
@keyframes blink{0%,45%{opacity:1}50%,95%{opacity:.25}100%{opacity:1}}
@keyframes rise{from{opacity:0;transform:translateY(6px)}to{opacity:1;transform:none}}

```

```
/* ---------------- status strip ---------------- */
.strip{flex:none;display:grid;gap:var(--gap);align-items:stretch;
  grid-template-columns:auto minmax(150px,.85fr) repeat(3,minmax(86px,.5fr)) minmax(84px,.55fr)
minmax(168px,.95fr) auto}
.brand{display:flex;align-items:center;gap:6px;border:2px solid var(--edge);
  border-radius:12px;padding:3px 9px;background:linear-gradient(162deg,var(--lite),var(--raised));
  box-shadow:var(--hard-sm), var(--soft-sm);cursor:default;user-select:none;
  transition:transform .1s ease, box-shadow .1s ease}
.brand:hover{transform:translate(-1px,-1px)}
.brand:active{transform:translate(3px,3px);box-shadow:var(--press)}
.brand .ico{width:19px;height:19px;color:var(--teal)}
.brand:hover .wave{animation:nudgeR .9s ease-in-out infinite}
.brand .t{font-size:14px;font-weight:900;letter-spacing:-.02em;text-transform:uppercase;
  white-space:nowrap}
/* circular badge logo, one per theme, with a sweep of gloss on hover */
.logo{position:relative;width:84px;height:84px;border-radius:50%;overflow:hidden;
  flex:none;display:block;transition:transform .18s ease, filter .18s ease}
.logo img{width:100%;height:100%;display:block;object-fit:contain}
.logo .lg-dark{display:none}
[data-theme="dark"] .logo .lg-light{display:none}
[data-theme="dark"] .logo .lg-dark{display:block}
.logo::after{content:"";position:absolute;top:-60%;bottom:-60%;width:38%;
  left:-45%;pointer-events:none;transform:rotate(18deg);
  background:linear-gradient(100deg,transparent,rgba(255,255,255,.72),transparent);
  opacity:0;transition:opacity .15s ease}
.brand:hover .logo{transform:scale(1.06);filter:brightness(1.06)}
.brand:hover .logo::after{opacity:1;animation:shine 1.05s ease-in-out}
.brand:active .logo{transform:scale(.96)}
@keyframes shine{0%{left:-45%}100%{left:115%}}
.brand .t b{background:var(--text);color:var(--base2);padding:1px 6px;border-radius:7px;
  margin-left:2px;box-shadow:2px 2px 0 var(--chip-sh)}

.box{position:relative;overflow:hidden;background:var(--raised);
  border:2px solid var(--edge);border-radius:12px;
  box-shadow:var(--hard-sm), var(--soft-sm);padding:3px 8px;display:flex;
  flex-direction:column;justify-content:center;min-width:0}
.box::after{content:"";position:absolute;inset:2px 2px auto 2px;height:46%;
  border-radius:11px 11px 50%/14px;background:linear-gradient(var(--lite),transparent);
  opacity:.55;pointer-events:none}
.box .k{position:relative;z-index:1;font-size:10px;font-weight:700;color:var(--muted);
  display:flex;align-items:center;gap:4px;white-space:nowrap;overflow:hidden}
.box .v{position:relative;z-index:1;font-size:17px;font-weight:900;
  font-variant-numeric:tabular-nums;letter-spacing:-.02em;line-height:1.05}
.box .v small{font-size:10px;font-weight:700;color:var(--muted)}
.box .ico{width:13px;height:13px}
.c-bottle{color:var(--c-bottle)} .c-bag{color:var(--c-bag)} .c-cont{color:var(--c-cont)}
.box.bump .v{animation:pop .4s ease}

/* ---------------- UPS battery ---------------- */
/* Mirrors the UPS HAT (E) readout: a pack glyph that fills with charge, then
   pack voltage, battery current and power. Current and power go negative when
   the pack is feeding the Pi (AC unplugged), as the HAT reports them. */
.batt{gap:2px}
.batt .k b{font-weight:900;color:var(--text)}
.bt-row{position:relative;z-index:1;display:flex;align-items:center;gap:8px}
.bt-cell{position:relative;flex:none;width:50px;height:24px;border:2px solid var(--edge);
  border-radius:6px;background:var(--sunk);box-shadow:var(--well);padding:2px;
  margin-right:4px}
.bt-cell::after{content:"";position:absolute;right:-6px;top:6px;width:4px;height:8px;
  border:2px solid var(--edge);border-left:0;border-radius:0 3px 3px 0;background:var(--raised)}
.bt-fill{display:block;height:100%;width:0;border-radius:3px;position:relative;overflow:hidden;
  background:linear-gradient(180deg,#7BE08F,var(--ok));
  transition:width .7s cubic-bezier(.4,0,.2,1), background .3s}
/* four 21700 cells, so four segments */
.bt-cell .seg{position:absolute;inset:2px;pointer-events:none;
  background:repeating-linear-gradient(90deg,transparent 0 calc(25% - 1px),var(--sunk) calc(25% - 1px)
25%)}
.bt-bolt{position:absolute;left:50%;top:50%;width:16px;height:16px;margin:-8px 0 0 -8px;
  color:#fff;stroke:var(--edge);stroke-width:1.4;display:none;
  filter:drop-shadow(0 1px 0 rgba(0,0,0,.35))}
.b-chg .bt-bolt{display:block;animation:pop 1.6s ease-in-out infinite}
.b-chg .bt-fill::after{content:"";position:absolute;top:0;bottom:0;width:40%;
  background:linear-gradient(90deg,transparent,rgba(255,255,255,.55),transparent);
  animation:sweep 2.2s ease-in-out infinite}
.b-warn .bt-fill{background:linear-gradient(180deg,#F9CF6A,var(--warn))}
.b-bad .bt-fill{background:linear-gradient(180deg,#FF8A7E,var(--bad))}
.b-bad:not(.b-chg) .bt-cell{animation:blink 1.4s ease-in-out infinite}
.b-bad{border-color:var(--bad)}
.batt .v{font-size:19px}
.bt-m{position:relative;z-index:1;margin:0;display:flex;gap:7px;font-size:11px;font-weight:800;
  font-variant-numeric:tabular-nums;white-space:nowrap;color:var(--text)}
```

```
.bt-m span{display:inline-flex;align-items:baseline;gap:1px}
.bt-m small{font-size:9px;font-weight:800;color:var(--muted)}
.bt-m .neg{color:#A35A00}
[data-theme="dark"] .bt-m .neg{color:var(--warn)}
.bt-m .pos{color:var(--teal)}
.batt .k .ico{width:12px;height:12px}
.b-chg .k .ico{color:var(--teal)}
.b-dis .k .ico{color:#A35A00}
[data-theme="dark"] .b-dis .k .ico{color:var(--warn)}
.b-none .bt-m,.b-none .v{opacity:.45}

/* ---------------- minimize to a bubble ---------------- */
#app{flex:1;min-height:0;display:flex;flex-direction:column;gap:var(--gap);
  transform-origin:calc(100% - 46px) calc(100% - 46px);
  transition:transform .42s cubic-bezier(.6,-.05,.3,1), opacity .32s ease, filter .32s ease}
.mini #app{transform:scale(.06);opacity:0;filter:blur(2px);pointer-events:none}
.ctl-row #miniBtn{flex:none;width:36px;padding:0}
#miniBtn .ico{width:16px;height:16px}
#miniBtn:hover .m-arr{animation:mini .9s ease-in-out infinite}
@keyframes mini{0%,100%{transform:translate(0,0)}50%{transform:translate(2px,2px)}}

.bub{position:fixed;right:14px;bottom:14px;z-index:90;width:72px;height:72px;padding:0;
  border-radius:50%;border:2px solid var(--edge);cursor:pointer;
  background:linear-gradient(162deg,var(--lite),var(--raised));
  box-shadow:var(--hard), var(--soft);display:grid;place-items:center;
  opacity:0;transform:scale(.3) rotate(-30deg);pointer-events:none;
  transition:opacity .2s ease, transform .45s cubic-bezier(.34,1.56,.64,1)}
.mini .bub{opacity:1;transform:none;pointer-events:auto;transition-delay:.22s}
.bub:active{transform:scale(.92);box-shadow:var(--press)}
/* battery ring around the badge, same colours as the battery panel */
.bub .ring{position:absolute;inset:4px;border-radius:50%;
  background:conic-gradient(var(--ring,var(--ok)) calc(var(--p,0)*1%), var(--sunk) 0);
  -webkit-mask:radial-gradient(circle,transparent 26px,#000 27px);
          mask:radial-gradient(circle,transparent 26px,#000 27px)}
.bub .logo{width:50px;height:50px;position:relative}
.bub .dot2{position:absolute;top:3px;right:3px;width:16px;height:16px;border-radius:50%;
  border:2px solid var(--edge);background:var(--ok);box-shadow:0 0 0 2px var(--raised)}
.bub.alert .dot2{background:var(--bad);animation:pulse 1s ease-in-out infinite}
.bub.off .dot2{background:var(--muted)}
.bub .chg{position:absolute;bottom:-4px;left:50%;margin-left:-11px;width:22px;height:22px;
  border-radius:50%;border:2px solid var(--edge);background:var(--teal);color:#fff;
  display:none;place-items:center}
.bub .chg .ico{width:12px;height:12px}
.bub.charging .chg{display:grid}
.mini .bub .logo{animation:bubIn .6s .3s ease both}
@keyframes bubIn{0%{transform:scale(.6) rotate(-90deg)}100%{transform:none}}
.mini .bub:not(:active){animation:bob 3.2s 1s ease-in-out infinite}
@keyframes bob{0%,100%{translate:0 0}50%{translate:0 -3px}}

.level::after{display:none}
.level{padding:0}
.level .bar{position:absolute;inset:0 auto 0 0;width:0;opacity:.45;
  background:var(--ok);transition:width .55s cubic-bezier(.4,0,.2,1), background .3s}
.level .inner{position:relative;z-index:1;padding:3px 9px;display:flex;
  flex-direction:column;justify-content:center;height:100%}
.level .big{font-size:19px;font-weight:900;font-variant-numeric:tabular-nums;
  line-height:1.05;letter-spacing:-.03em;display:flex;align-items:center;gap:6px}
.level .big span{font-size:11px;font-weight:700;color:var(--muted)}
.level .state{font-size:10px;font-weight:800;display:flex;align-items:center;gap:5px}
.level .ico{width:14px;height:14px}
.lv-ok .state{color:#1F7A33}
[data-theme="dark"] .lv-ok .state{color:var(--ok)}
.lv-warn .bar{background:var(--warn)}
.lv-near .bar{background:var(--orange)}
.lv-muted .bar{background:var(--purple)}
.lv-bad .bar{background:var(--bad)}
.lv-warn .state{color:#8A6100}
[data-theme="dark"] .lv-warn .state{color:var(--warn)}
.lv-near{border-color:var(--orange)}
.lv-near .state{color:var(--orange)}
.lv-near .state .ico{animation:pulse 1.2s ease-in-out infinite}
.lv-muted .state{color:var(--purple)}
.lv-bad{border-color:var(--bad);animation:alarm 1.5s ease-in-out infinite}
.lv-bad .state{color:var(--bad)}
.lv-bad .state .ico{animation:ring .9s ease-in-out infinite;transform-origin:center}
@keyframes alarm{0%,100%{box-shadow:var(--hard-sm), var(--soft-sm)}
  50%{box-shadow:var(--hard-sm), 0 0 0 4px var(--bad-tint)}}

.pill{display:inline-flex;align-items:center;gap:6px;border:2px solid var(--edge);
  border-radius:999px;background:linear-gradient(162deg,var(--lite),var(--raised));
  box-shadow:var(--hard-sm), var(--soft-sm);padding:3px 10px;font-weight:800;
```

```
  font-size:12px;white-space:nowrap;cursor:default;transition:transform .1s}
.pill:hover{transform:translate(-1px,-1px)}
.pill .ico{width:14px;height:14px}
.pill.online{color:#15703A} .pill.online .ico{color:var(--ok)}
[data-theme="dark"] .pill.online{color:var(--ok)}
.pill.online .ico{animation:pulse 1.8s ease-in-out infinite}
.pill.offline{color:var(--bad);animation:shake 2.6s ease-in-out infinite}
.pill.offline .ico{color:var(--bad)}
.ctl{display:flex;flex-direction:column;gap:6px;justify-content:center}
.ctl-row{display:flex;gap:6px}
.clk{display:flex;align-items:center;justify-content:center;gap:6px;border:2px solid var(--edge);
  border-radius:999px;background:linear-gradient(162deg,var(--lite),var(--raised));
  box-shadow:var(--hard-sm), var(--soft-sm);padding:3px 8px;font-weight:800;font-size:12px;
  white-space:nowrap;cursor:default;font-variant-numeric:tabular-nums}
.clk .ico{width:14px;height:14px;color:var(--purple);flex:none}
.clk.warn{color:#9A6A00;border-color:var(--warn)} .clk.warn .ico{color:var(--warn)}
[data-theme="dark"] .clk.warn{color:var(--warn)}
.ctl-row .pill{flex:1;min-width:0;justify-content:center}
/* phone badge: grey when no app is polling, teal with a beating dot when the
   mobile app is, blue when only a browser on another device is watching */
.phn{position:relative;flex:none;width:36px;min-height:30px;border-radius:999px;cursor:pointer;
  border:2px solid var(--edge);display:grid;place-items:center;padding:0;
  background:linear-gradient(162deg,var(--lite),var(--raised));box-shadow:2px 2px 0 var(--edge), var(--
soft-sm);
  transition:transform .1s ease, box-shadow .1s ease, background .2s}
.phn:active{transform:translate(2px,2px);box-shadow:var(--press)}
.phn .ico{width:15px;height:15px}
.phn.none{color:var(--muted)}
.phn.app{color:#fff;background:linear-gradient(162deg,var(--teal-lt),var(--teal))}
.phn.web{color:#fff;background:linear-gradient(162deg,#6FB6F5,var(--c-bottle))}
.phn b{position:absolute;top:-6px;right:-6px;min-width:17px;height:17px;padding:0 4px;border-radius:999px;
  font-size:10px;font-weight:900;line-height:13px;text-align:center;border:2px solid var(--edge);
  background:var(--raised);color:var(--text)}
.phn b:empty{display:none}
.phn i{display:none;place-items:center;width:17px;height:17px;border-radius:999px;flex:none;
  border:2px solid var(--edge);background:var(--orange);color:#fff}
.phn.cloud{width:auto;padding:0 5px 0 4px;grid-auto-flow:column;gap:4px;place-items:center}
.phn.cloud i{display:grid;order:-1}
.phn i svg{width:9px;height:9px}
.phn.cloud.idle i{background:var(--slate)}
.phn.cloud.bad i{background:var(--bad)}
.phn.app::after{content:"";position:absolute;inset:-4px;border-radius:999px;border:2px solid var(--teal);
  animation:phnBeat 1.8s ease-out infinite;pointer-events:none}
@keyframes phnBeat{0%{opacity:.8;transform:scale(.9)}100%{opacity:0;transform:scale(1.35)}}
.ctl-row #theme{flex:1;width:auto}
.ctl-row #wifiBtn{flex:none;text-decoration:none;color:inherit;padding:5px 9px}
#wifiBtn[hidden]{display:none}


/* ---------------- tabs ---------------- */
.tabs{flex:none;display:flex;gap:8px}
.tab{flex:1;display:inline-flex;align-items:center;justify-content:center;gap:7px;
  border:2px solid var(--edge);border-radius:12px 12px 0 0;background:var(--sunk);
  color:var(--muted);padding:4px;font-weight:900;font-size:13px;cursor:pointer;
  box-shadow:var(--press);min-height:32px;transition:box-shadow .15s, color .15s, background .15s}
.tab:hover{color:var(--text)}
.tab[aria-selected="true"]{background:linear-gradient(162deg,var(--lite),var(--raised));
  color:var(--text);box-shadow:var(--hard-sm), var(--soft-sm)}
.tab .ico{width:15px;height:15px}
.tab[aria-selected="true"] .ico{color:var(--teal)}
.tab .count{font-weight:800;color:var(--muted);font-size:11px}

main{flex:1;min-height:0;display:flex}
.page{display:none;flex:1;min-height:0;animation:rise .22s ease}
.page.on{display:flex}

/* ---------------- cards ---------------- */
.card{position:relative;background:var(--raised);border:2px solid var(--edge);
  border-radius:16px;box-shadow:var(--hard), var(--soft);padding:8px;min-height:0;
  display:flex;flex-direction:column}
.card::before{content:"";position:absolute;inset:2px 2px auto 2px;height:34px;
  border-radius:15px 15px 40%/12px;background:linear-gradient(var(--lite),transparent);
  opacity:.5;pointer-events:none}
.hd{position:relative;z-index:1;display:flex;align-items:center;gap:6px;flex:none;
  margin-bottom:6px}
.hd h2{font-size:14px;font-weight:900;margin:0;flex:1;white-space:nowrap;
  overflow:hidden;text-overflow:ellipsis}
.hd .ico{width:18px;height:18px}
.card-feed .hd .ico{color:var(--c-bottle)}
.card-set  .hd .ico{color:var(--teal)}
.card-area .hd .ico{color:var(--amber)}
```

```
.card-log  .hd .ico{color:var(--violet)}
.card-feed .hd .ico{animation:pulse 2.8s ease-in-out infinite}
.card-set:hover .hd .ico{animation:spin 4.5s linear infinite}
.card-area .hd .ico{animation:floaty 3s ease-in-out infinite}
.card-log:hover .hd .ico{animation:tick 2s steps(8) infinite}
@keyframes floaty{0%,100%{transform:translateY(0)}50%{transform:translateY(-2.5px)}}
@keyframes tick{to{transform:rotate(360deg)}}

/* ---------------- live feed, TV styling ---------------- */
/* The whole card is the monitor: housing, bezel labels and hardware buttons.
   Only the screen is black glass, so the feed gets the space the old header,
   inner TV frame and footer note used to take. */
.card-feed{flex:1;min-width:0}
.monitor{gap:0;padding:0;border-radius:18px;color:var(--mon-ink);background:var(--mon-bg);
  box-shadow:var(--hard), var(--soft), var(--mon-rim);
  transition:background .35s ease, color .35s ease}
.monitor::before{border-radius:16px 16px 50%/14px;opacity:.12}
[data-theme="dark"] .monitor::before{opacity:.5}
.mon-top,.mon-bot{position:relative;z-index:1;flex:none;display:flex;align-items:center;
  gap:8px;padding:0 10px}
.mon-top{height:42px}
.mon-bot{min-height:46px;padding-bottom:2px}
.led{width:8px;height:8px;border-radius:50%;background:var(--ok);flex:none;
  box-shadow:0 0 7px var(--ok);animation:blink 2.6s ease-in-out infinite}
.led.dead{background:var(--bad);box-shadow:0 0 7px var(--bad);animation:none}
.engr{font-size:10px;font-weight:900;letter-spacing:.11em;color:var(--mon-engr);white-space:nowrap;
  text-shadow:var(--mon-emboss)}
.fpsb{color:var(--mon-fps);font-variant-numeric:tabular-nums;min-width:52px}
.hint{flex:1;min-width:0;display:flex;align-items:center;gap:5px;overflow:hidden;
  text-overflow:ellipsis;letter-spacing:.02em;font-weight:700;color:#BDB3A7}
.hint .ico{width:12px;height:12px;flex:none}
.monitor .mon-top .hint{color:var(--mon-hint);margin:0;font-size:10px}
.drawing .hint{color:#F0B429}
[data-theme="dark"] .drawing .hint{color:#9A6A00}
.screen{position:relative;flex:1;min-height:0;margin:0 10px;border-radius:9px;overflow:hidden;
  background:#0B0A09;border:2px solid #0E0C0A;
  box-shadow:inset 0 0 0 1px #000, inset 0 0 26px rgba(0,0,0,.85), 0 1px 0 rgba(255,255,255,.12)}
.drawing .screen{cursor:crosshair}
/* When the Pi is offline the img has no frame to show, and the browser paints
   the alt text in --text over the black screen. Zero font size drops the
   stray caption and leaves the "No camera signal" panel to say it instead. */
#feed{position:absolute;inset:0;width:100%;height:100%;object-fit:contain;display:block;
  font-size:0;color:transparent}
#overlay{position:absolute;inset:0;width:100%;height:100%}
.zoomer{position:absolute;inset:0;transform-origin:0 0}
/* Pinch zoom. The page itself must not pinch or scroll under the fingers. */
.fs-stage .screen,.zpic{touch-action:none}
.zreset{position:absolute;left:10px;bottom:10px;z-index:6;display:flex;align-items:center;gap:5px;
  padding:6px 11px;border-radius:10px;border:2px solid #F4EFE6;background:rgba(14,12,10,.78);
  color:#F4EFE6;font:inherit;font-size:13px;font-weight:900;cursor:pointer;font-variant-numeric:tabular-
nums}
.zreset .ico{width:15px;height:15px}
.zreset[hidden]{display:none}
.scan{position:absolute;inset:0;pointer-events:none;
  background:repeating-linear-gradient(rgba(255,255,255,.045) 0 1px, transparent 1px 3px)}
.glare{position:absolute;top:0;bottom:0;width:26%;pointer-events:none;
  background:linear-gradient(105deg,transparent,rgba(255,255,255,.1),transparent);
  animation:sweep 7s ease-in-out infinite}

/* hardware buttons on the housing */
.hw{display:inline-flex;align-items:center;justify-content:center;gap:6px;flex:none;
  min-height:32px;padding:0 12px;border-radius:9px;cursor:pointer;
  font:inherit;font-size:12px;font-weight:900;letter-spacing:.03em;color:var(--hw-ink);
  border:2px solid #0E0C0A;background:var(--hw-bg);
  box-shadow:0 3px 0 #0E0C0A, var(--hw-hi);
  transition:transform .08s ease, box-shadow .08s ease, filter .15s ease}
.hw:hover{filter:brightness(1.12)}
.hw:active{transform:translateY(3px);box-shadow:0 0 0 #0E0C0A, inset 0 2px 4px rgba(0,0,0,.45)}
.hw .ico{width:15px;height:15px}
.hw.teal{background:linear-gradient(180deg,var(--teal-lt),var(--teal));color:#fff}
.hw[hidden]{display:none}
.hw:disabled{opacity:.38;cursor:not-allowed;transform:none;filter:none;
  box-shadow:0 3px 0 #0E0C0A}
.hw:disabled .ico{animation:none!important}
.hw:hover .a-shutter{animation:shutter .9s ease-in-out infinite}
.hw:hover .a-shake{animation:shake .6s ease-in-out infinite}
.hw:hover .a-pop{animation:pop .7s ease-in-out infinite}
.hw.sq{width:34px;padding:0}
.hw.sq .ico{width:18px;height:18px}

/* LCD readout for the alert and mute state */
```

```
.lcd{position:relative;flex:1;min-width:150px;height:32px;display:flex;align-items:center;
  gap:7px;padding:0 10px;border-radius:7px;overflow:hidden;
  background:#14201A;border:2px solid #0E0C0A;
  box-shadow:inset 0 2px 6px rgba(0,0,0,.7), 0 1px 0 rgba(255,255,255,.1);
  font-family:"DejaVu Sans Mono",ui-monospace,Menlo,Consolas,monospace;
  font-size:12px;font-weight:700;letter-spacing:.04em;color:#7FD99A;
  text-shadow:0 0 6px rgba(127,217,154,.45)}
.lcd .ico{width:14px;height:14px;color:currentColor}
.lcd .mute-txt{flex:1;min-width:0;white-space:nowrap;overflow:hidden;text-overflow:ellipsis;
  font-weight:700;font-size:12px}
.mon-bot.is-idle .lcd{color:#5E9C72;text-shadow:none}
.mon-bot.is-idle .lcd .ico{animation:none}
.mon-bot.is-alert .lcd{color:#FF8A7E;text-shadow:0 0 7px rgba(255,138,126,.55);
  animation:lcdAlarm 1.1s steps(2) infinite}
.mon-bot.is-muted .lcd{color:#F0B429;text-shadow:0 0 7px rgba(240,180,41,.5)}
.mon-bot.is-muted .lcd .ico{animation:none}
@keyframes lcdAlarm{50%{color:#FFD2CC}}
.monitor .mon-bot.mute,.monitor .mon-bot.mute.is-muted,.monitor .mon-bot.mute.is-idle{
  border:0;border-radius:0;background:none;box-shadow:none;padding:0 10px 2px;flex-wrap:nowrap}
.monitor .mon-bot .hw .ico,.monitor .mon-bot.is-idle .hw .ico{color:inherit}
.prog{display:none}
.is-muted .prog.on{display:block}
.lcd .prog{position:absolute;left:0;right:0;bottom:0;height:3px;background:rgba(240,180,41,.18)}
.prog > i{display:block;height:100%;width:100%;background:#F0B429;transition:width .9s linear}
.mon-bot .mute-pick{color:var(--mon-engr);font-size:10px;letter-spacing:.08em;text-transform:uppercase}
.mon-bot .mute-pick select{background:var(--mon-well);color:var(--mon-well-ink);border:2px solid #0E0C0A;
  box-shadow:inset 0 2px 4px rgba(0,0,0,.5);text-transform:none;letter-spacing:0;
  min-height:32px}

/* auto-mute switch */
.sw{display:inline-flex;align-items:center;gap:7px;flex:none;min-height:32px;padding:0 4px;
  border:0;background:none;cursor:pointer;font:inherit;font-size:10px;font-weight:900;
  letter-spacing:.08em;text-transform:uppercase;color:var(--mon-engr)}
.sw > i{position:relative;width:38px;height:22px;border-radius:999px;flex:none;
  background:var(--mon-well);border:2px solid #0E0C0A;box-shadow:inset 0 2px 4px rgba(0,0,0,.55);
  transition:background .18s ease}
.sw > i::after{content:"";position:absolute;top:2px;left:2px;width:14px;height:14px;
  border-radius:50%;background:linear-gradient(180deg,#F5F0E8,#B9AFA3);
  box-shadow:0 1px 2px rgba(0,0,0,.6);transition:transform .18s ease}
.sw[aria-checked="true"] > i{background:var(--teal);box-shadow:inset 0 2px 4px rgba(0,0,0,.35),
  0 0 8px rgba(23,166,143,.55)}
.sw[aria-checked="true"] > i::after{transform:translateX(16px)}
.sw[aria-checked="true"]{color:var(--mon-fps)}
.flag,.off{position:absolute;font-weight:900;border:2px solid var(--edge);
  border-radius:9px;display:none;line-height:1.2;z-index:3}
.flag{top:8px;right:8px;background:var(--bad);color:#fff;padding:5px 10px;font-size:13px;
  align-items:center;gap:6px;box-shadow:var(--hard-sm)}
.flag.show{display:flex;animation:alarm 1.2s ease-in-out infinite}
.flag .ico{width:15px;height:15px;animation:ring .8s ease-in-out infinite;transform-origin:center}
.off{top:50%;left:50%;transform:translate(-50%,-50%);background:var(--raised);
  padding:9px 14px;font-size:13px;align-items:center;gap:7px}
.off.show{display:flex}
.off .ico{width:17px;height:17px;color:var(--bad);animation:shake 2s ease-in-out infinite}
.mute{flex:none;display:flex;align-items:center;gap:8px;flex-wrap:wrap;
  border:2px solid var(--edge);border-radius:12px;padding:4px 9px;
  background:var(--warn-tint);box-shadow:var(--hard-sm), var(--soft-sm)}
.mute[hidden]{display:none}
.mute .ico{width:15px;height:15px;color:var(--bad)}
.mute-txt{font-weight:800;font-size:12px;flex:1;min-width:110px}
.mute-pick{display:flex;align-items:center;gap:5px;font-size:11px;font-weight:800;
  color:var(--muted)}
.mute-pick select{border:2px solid var(--edge);border-radius:9px;background:var(--sunk);
  box-shadow:var(--well);padding:3px 6px;font-size:12px;font-weight:800;
  color:var(--text);min-height:28px}
.mute.is-muted{background:var(--sunk)}
.mute.is-muted .ico{color:var(--muted);animation:none}
.mute.is-idle{background:var(--base2)}
.mute.is-idle .ico{color:var(--muted);animation:none}
.mute.is-idle .mute-txt{color:var(--muted);font-weight:700}
.mute .left{font-variant-numeric:tabular-nums;font-weight:900}
/* fullscreen toggle, sits on the TV bezel so it does not move with the screen */
.fsbtn{position:absolute;right:10px;bottom:10px;z-index:4;width:40px;height:40px;
  display:flex;align-items:center;justify-content:center;padding:0;cursor:pointer;
  border:2px solid var(--edge);border-radius:11px;opacity:.7;
  background:rgba(245,240,232,.78);color:var(--text);
  box-shadow:var(--hard-sm), var(--soft-sm);
  transition:opacity .18s ease, transform .18s ease, box-shadow .18s ease}
[data-theme="dark"] .fsbtn{background:rgba(26,23,20,.72);color:var(--text)}
.fsbtn:hover{opacity:1;transform:scale(1.08);
  box-shadow:var(--hard-sm), 0 0 0 4px var(--teal-tint)}
.fsbtn:active{opacity:1;transform:scale(.94);box-shadow:var(--press)}
```

```
.fsbtn:disabled{opacity:.25;cursor:not-allowed;transform:none;
  box-shadow:var(--hard-sm)}
.fsbtn .ico{width:20px;height:20px}
.fsbtn .c{transition:transform .2s ease}
.fsbtn:hover .tl{transform:translate(-2px,-2px)}
.fsbtn:hover .tr{transform:translate(2px,-2px)}
.fsbtn:hover .br{transform:translate(2px,2px)}
.fsbtn:hover .bl{transform:translate(-2px,2px)}
.fsbtn.out:hover .tl{transform:translate(2px,2px)}
.fsbtn.out:hover .tr{transform:translate(-2px,2px)}
.fsbtn.out:hover .br{transform:translate(-2px,-2px)}
.fsbtn.out:hover .bl{transform:translate(2px,-2px)}

/* fullscreen overlay */
.fs{position:fixed;inset:0;z-index:100;background:var(--base);
  display:flex;flex-direction:column;gap:6px;padding:6px;
  opacity:0;transform:scale(.97);transition:opacity .2s ease, transform .2s ease}
.fs[hidden]{display:none}
.fs.on{opacity:1;transform:none}
.fs-top,.fs-bot{flex:none;display:flex;align-items:center;gap:10px;flex-wrap:wrap;
  border:2px solid var(--edge);border-radius:13px;padding:6px 10px;
  background:var(--raised);box-shadow:var(--hard-sm), var(--soft-sm)}
.fs-top{font-size:14px;font-weight:800}
.fs-brand{display:flex;align-items:center}
.fs-brand .logo{width:46px;height:46px}
.fs-cam{display:flex;align-items:center;gap:6px;font-size:14px;font-weight:800;
  color:var(--muted)}
.fs-top .sp{flex:1}
.fs-stat{display:flex;align-items:baseline;gap:5px}
.fs-stat .ico{align-self:center;width:15px;height:15px}
.fs-num{font-variant-numeric:tabular-nums;font-weight:900}
.fs-sub{font-size:12px;color:var(--muted);font-weight:700}
.fs-stage{flex:1;min-height:0;position:relative;border:2px solid var(--edge);
  border-radius:13px;overflow:hidden;background:#0B0A09;box-shadow:var(--press)}
.fs-stage > .screen{position:absolute;inset:0;border-radius:11px}
.fs-bot{gap:14px}
.fs-chip{display:flex;align-items:center;gap:6px;font-size:14px;font-weight:800}
.fs-chip .ico{width:15px;height:15px}
.fs-chip b{font-size:18px;font-weight:900;font-variant-numeric:tabular-nums}
.fs-state{display:flex;align-items:center;gap:7px;font-size:14px;font-weight:800;
  border:2px solid var(--edge);border-radius:11px;padding:4px 10px;background:var(--base2)}
.fs-state.lv-warn{background:var(--warn-tint)}
.fs-state.lv-bad{background:var(--bad-tint);color:var(--bad)}
.fs-state .ico{width:16px;height:16px}
/* the shared .fsbtn rule is absolute for the bezel button; the exit button
   lives in the top bar instead */
.mon-top .fsbtn{position:static;opacity:1;width:34px;height:auto;min-height:32px;
  border-radius:9px;border:2px solid #0E0C0A;color:var(--hw-ink);background:var(--hw-bg);
  box-shadow:0 3px 0 #0E0C0A, var(--hw-hi)}
[data-theme="dark"] .mon-top .fsbtn{background:var(--hw-bg);color:var(--hw-ink)}
.mon-top .fsbtn:hover{transform:none;filter:brightness(1.12);
  box-shadow:0 3px 0 #0E0C0A, var(--hw-hi)}
.mon-top .fsbtn:active{transform:translateY(3px);box-shadow:0 0 0 #0E0C0A}
.mon-top .fsbtn:disabled{opacity:.38}
.fs-exit{position:static;width:44px;height:44px;flex:none;opacity:1}
.fs-exit .ico{width:22px;height:22px}

/* Fullscreen mirrors the normal view: the bars around the edge follow the
   page theme, and only the monitor (its engraved strip, the screen and the
   LCD mute strip) takes the reverse theme. */
.fs-top,.fs-bot{position:relative;z-index:1}
.fs-stat,.fs-chip{padding:4px 10px;border-radius:10px;background:var(--sunk);border:2px solid var(--edge);
  box-shadow:var(--well)}
.fs-stat .ico{color:var(--teal)}
.fs-stat .fs-sub{opacity:.85}
#fsPhn .ico{color:var(--muted)} #fsPhn.on .ico{color:var(--ok);animation:pulse 1.8s ease-in-out infinite}
.fs-state{box-shadow:2px 2px 0 var(--edge)}
.fs-state.lv-ok{background:var(--ok-tint);color:#1F7A33}
[data-theme="dark"] .fs-state.lv-ok{color:var(--ok)}
.fs-state.lv-warn{background:var(--warn-tint);color:#8A6100}
[data-theme="dark"] .fs-state.lv-warn{color:var(--warn)}
.fs-state.lv-near{background:color-mix(in srgb,var(--orange) 22%,var(--raised));color:var(--orange)}
.fs-state.lv-muted{background:var(--purple-tint);color:var(--purple)}
.fs-state.lv-bad{background:var(--bad);color:#fff;animation:alarm 1.5s ease-in-out infinite}
.fs-state.lv-bad .ico{animation:ring .9s ease-in-out infinite}
/* The screen takes the full height of the monitor and is sized to the
   camera's own shape (fitFs), so there are no black bars beside the picture.
   The hardware keys and readouts sit on the bezel either side of it. */
.fs-top{flex-wrap:nowrap;padding:4px 8px;min-height:0}
.fs-top .fs-brand .logo{width:34px;height:34px}
.fs-top .pill{padding-block:4px}
```

```
.fs-top .fs-stat,.fs-top .fs-state{padding:3px 9px}
.fs-top .btn.sm{min-height:34px}
.fs-exit{width:38px;height:38px}
.fs-mon{flex:1;min-height:0;display:flex;flex-direction:column;gap:6px;border:2px solid var(--edge);
  padding:7px 7px 6px}
.fs-row{flex:1;min-height:0;display:flex;align-items:center;gap:7px;position:relative;z-index:1}
.fs-mon .fs-stage{flex:none;width:0;height:100%;align-self:center;border:2px solid #0E0C0A;border-
radius:11px;
  box-shadow:inset 0 0 0 1px #000, inset 0 0 26px rgba(0,0,0,.85), 0 1px 0 rgba(255,255,255,.12)}
.fs-keys{flex:1;min-width:58px;align-self:stretch;display:flex;flex-direction:column;align-items:center;
  justify-content:center;gap:10px}
.fk-cam{display:flex;align-items:center;gap:5px}
.fk-live{margin-top:-6px}
.fk-read{display:flex;flex-direction:column;align-items:center;line-height:1}
.fk-read b{font-size:17px;font-weight:900;color:var(--mon-fps);font-variant-numeric:tabular-nums}
.fk-meter{display:flex;flex-direction:column;align-items:center;gap:4px;line-height:1}
.fk-well{display:flex;flex-direction:column;justify-content:flex-end;width:16px;height:118px;
  border-radius:8px;overflow:hidden;background:var(--mon-well);border:2px solid #0E0C0A;
  box-shadow:inset 0 2px 5px rgba(0,0,0,.6)}
.fk-well > i{display:block;width:100%;background:var(--ok);border-radius:6px 6px 0 0;transition:height .5s
ease}
.fk-meter.lv-warn .fk-well > i{background:var(--warn)}
.fk-meter.lv-near .fk-well > i{background:var(--orange)}
.fk-meter.lv-bad .fk-well > i,.fk-meter.lv-muted .fk-well > i{background:var(--bad)}
.fk-meter b{font-size:20px;font-weight:900;font-variant-numeric:tabular-nums;color:var(--mon-ink)}
.fk-meter.lv-bad b{color:#FF8A7E}
.fk-cls{display:flex;flex-direction:column;gap:5px}
.fk-cls span{display:flex;align-items:center;gap:6px;padding:3px 8px;border-radius:8px;
  background:var(--mon-well);border:2px solid #0E0C0A;box-shadow:inset 0 2px 4px rgba(0,0,0,.5)}
.fk-cls .ico{width:14px;height:14px}
.fk-cls b{min-width:14px;text-align:right;font-size:14px;font-weight:900;color:var(--mon-well-ink);
  font-variant-numeric:tabular-nums}
.hw.fk{flex-direction:column;gap:4px;width:58px;min-height:58px;padding:6px 2px;font-size:10px;
  letter-spacing:.05em;text-transform:uppercase}
.hw.fk .ico{width:20px;height:20px}
.fk-sw{flex-direction:column;gap:5px;font-size:9.5px;text-align:center}
/* Drawing the monitored area in fullscreen: the right keys swap from the
   feed controls to the drawing keys, the same set the app shows, and a tip
   sits over the top of the picture with the running point count. */
.fs .fk-pen{display:none}
.fs.drawing .fs-r > *{display:none}
.fs.drawing .fs-r > .fk-pen{display:inline-flex}
.fs.drawing .screen{cursor:crosshair}
.hw:hover .a-tilt{animation:tilt .8s ease-in-out infinite}
.hw:hover .a-left{animation:nudgeL .7s ease-in-out infinite}
.fs-tip{position:absolute;left:50%;top:10px;transform:translateX(-50%);z-index:5;display:none;
  align-items:center;gap:6px;max-width:calc(100% - 20px);padding:5px 12px;border-radius:10px;
  background:rgba(14,12,10,.82);border:2px solid #F0B429;color:#F0B429;font-size:13px;font-weight:800;
  white-space:nowrap;overflow:hidden;text-overflow:ellipsis;pointer-events:none}
.fs-tip .ico{width:15px;height:15px;flex:none}
.fs.drawing .fs-tip{display:flex}
.fs-mon .fs-lcdrow{flex:none;min-height:0;height:40px;padding:0;position:relative;z-index:1}
.fs-mon .lcd{height:36px;font-size:13px}

.note{flex:none;font-size:11px;color:var(--muted);margin:0;display:flex;
  align-items:center;gap:5px}
.note .ico{width:13px;height:13px}

/* ---------------- side column ---------------- */
/* The column keeps its 312px footprint so the live feed card is not resized.
   The two cards are inset inside it instead, which is what stops their
   shadows landing on the feed.
   Why 18px: a card carries --soft, whose light arm is -5px -5px 11px, so it
   reaches 16px past its own left edge. #monitor is a flex row with no gap, so
   at 0px of separation that halo fell 16px onto the live feed card.
   The 16px column gap is the same sum applied vertically, between the two
   cards. */
.side{width:312px;flex:none;display:flex;flex-direction:column;gap:12px;
  min-height:0;padding:0 6px 0 20px;overflow-y:auto;overscroll-behavior:contain;
  scrollbar-width:thin;scrollbar-color:var(--shade) transparent}
.side::-webkit-scrollbar{width:9px}
.side::-webkit-scrollbar-track{background:transparent}
.side::-webkit-scrollbar-thumb{background:var(--shade);border-radius:999px}
.card-set,.card-area{flex:none}
.side .hd{margin-bottom:3px}
.side .field{margin-bottom:3px}
/* Tapping Draw reveals #undo, 36px the column does not have, which pushed the
   hint under it off the bottom of a 600px screen. #undo sits immediately
   before that hint, so the hint stands down while a region is being drawn.
   Nothing is lost: the live "Drawing: N points placed" note under the video
   is saying the same thing, larger and updating. Plain sibling selector, so
```

```
   it works on older Chromium builds too. */
#undo[style*="flex"] + .hint{display:none}
.field{margin-bottom:5px}
.field label{display:flex;align-items:center;gap:5px;font-size:11.5px;font-weight:800;
  margin-bottom:3px}
.field label .ico{width:13px;height:13px;color:var(--muted)}
.well{display:flex;align-items:center;gap:6px;background:var(--sunk);
  border:2px solid var(--edge);border-radius:12px;box-shadow:var(--well);
  padding:2px 4px 2px 10px}
.well input{border:0;background:transparent;font-size:17px;font-weight:900;width:100%;
  outline:none;font-variant-numeric:tabular-nums;min-width:0}
.well .u{font-weight:800;color:var(--muted);font-size:11px;white-space:nowrap}
.step{width:30px;height:30px;border:2px solid var(--edge);border-radius:9px;
  background:linear-gradient(162deg,var(--lite),var(--raised));font-weight:900;
  font-size:18px;cursor:pointer;flex:none;line-height:1;box-shadow:var(--soft-sm);
  transition:box-shadow .09s, transform .09s}
.step:hover{transform:translateY(-1px)}
.step:active{box-shadow:var(--press);transform:translateY(1px)}
/* The button stays 30px so the well does not grow, but the tap area is padded
   out to 44x46 , which is the usual finger minimum on a touchscreen. */
.step{position:relative}
.step::after{content:"";position:absolute;inset:-7px -8px}
.hint{font-size:10px;color:var(--muted);margin:2px 0 0;line-height:1.25;
  display:flex;align-items:flex-start;gap:4px}
.hint .ico{width:12px;height:12px;margin-top:1px;flex:none}
.pair{display:grid;grid-template-columns:1fr 1fr;gap:7px}

/* ---------------- history ---------------- */
#history{flex-direction:column}
.card-log{flex:1;min-height:0;min-width:0;gap:5px}
.tools{flex:none;display:flex;align-items:center;gap:6px;flex-wrap:wrap;
  padding-bottom:5px;border-bottom:2px dashed var(--shade)}
.tools .dt{display:flex;align-items:center;gap:4px;background:var(--sunk);
  border:2px solid var(--edge);border-radius:9px;box-shadow:var(--well);padding:2px 7px}
.tools .dt label{font-size:10px;font-weight:800;color:var(--muted)}
.tools input[type=date]{border:0;background:transparent;outline:none;font-size:11px;
  font-weight:800;width:104px}
.tools .sp{flex:1}
.tools.dates{padding:3px 0 0;border-bottom:0;gap:5px}
.scope{font-size:11.5px;font-weight:800;color:var(--muted);white-space:nowrap;
  overflow:hidden;text-overflow:ellipsis}
.tablewrap{flex:1;min-height:0;min-width:0;overflow:auto;border:2px solid var(--edge);
  border-radius:13px;background:var(--base);box-shadow:var(--press);
  scrollbar-width:thin;scrollbar-color:var(--shade) transparent}
.tablewrap::-webkit-scrollbar{width:11px;height:11px}
.tablewrap::-webkit-scrollbar-track{background:transparent}
.tablewrap::-webkit-scrollbar-thumb{background:var(--shade);border-radius:999px;
  border:2px solid var(--base2);background-clip:content-box}
/* The history keeps a table's columns, but every row is its own slab.
   Depth carries the priority, the same as the mobile app: an unread row
   stands out of the page, an unread "Limit reached" stands out furthest with
   a red edge, a stripe and a slow glow, and a read row is pressed into the
   page and fades back. */
.lt{--cols:52px 38px minmax(150px,1.05fr) minmax(170px,1.2fr) 70px 84px 56px;font-size:13px}
.lh,.lr{display:grid;grid-template-columns:var(--cols);align-items:center}
.lh{position:sticky;top:0;z-index:3;padding:7px 16px 7px 12px;margin-bottom:6px;
  background:var(--sunk);border-bottom:2px solid var(--edge);
  font-size:10.5px;font-weight:900;letter-spacing:.06em;text-transform:uppercase;color:var(--muted)}
.lh > span{display:flex;align-items:center;gap:5px;white-space:nowrap;padding:0 8px}
.lh .ico{width:13px;height:13px;color:var(--teal)}
.lh > span:nth-child(2) .ico{color:var(--teal)}
.lh > span:nth-child(3) .ico{color:var(--indigo)}
.lh > span:nth-child(4) .ico{color:var(--purple)}
.lh > span:nth-child(5) .ico{color:var(--orange)}
.lh > span:nth-child(6) .ico{color:var(--c-bottle)}
.lh > span:nth-child(7) .ico{color:var(--muted)}
.lh .c-no{justify-content:flex-end;padding-right:4px}
/* The record's place in the whole log: the newest of 300 reads 300. */
.lr .c-no{text-align:right;padding-right:4px;font-size:12px;font-weight:900;color:var(--muted)}
/* Snapshot thumbnail. The eye sits on a small light disc so the picture
   around it stays readable, and comes up fully on hover or keyboard focus. */
.thumb{position:relative;display:block;width:40px;height:40px;padding:0;border:2px solid var(--edge);
  border-radius:10px;overflow:hidden;background:#0B0A09;cursor:pointer;box-shadow:var(--hard-sm)}
.thumb img{display:block;width:100%;height:100%;object-fit:cover}
.thumb .th-eye{position:absolute;left:50%;top:50%;width:24px;height:24px;margin:-12px 0 0 -12px;
  display:grid;place-items:center;border-radius:50%;background:rgba(255,255,255,.55);color:#16130F;
  opacity:.72;transition:opacity .15s ease, background .15s ease, transform .15s ease}
.thumb .th-eye .ico{width:14px;height:14px}
.thumb:hover .th-eye,.thumb:focus-visible .th-
eye{opacity:1;background:rgba(255,255,255,.94);transform:scale(1.1)}
.thumb:focus-visible{outline:3px solid var(--teal);outline-offset:2px}
```

```
[data-theme="dark"] .thumb .th-eye{background:rgba(14,12,10,.5);color:#F4EFE6}
[data-theme="dark"] .thumb:hover .th-eye,[data-theme="dark"] .thumb:focus-visible .th-eye{background:rgba(14,12,10,.88)}
.lr .c-pic{padding-top:2px;padding-bottom:2px;overflow:visible}
#logMore{display:flex;justify-content:center;padding:2px 0 8px;font-size:11.5px;font-weight:800;color:var(--muted)}
#logMore[hidden]{display:none}
.lh .c-rd{justify-content:center;padding:0}
.lh .c-n{justify-content:flex-end}
.lh .c-act{justify-content:center}
#logs{padding:2px 14px 4px 10px;display:flex;flex-direction:column;gap:11px}
.lr{position:relative;min-height:46px;border:2px solid var(--edge);border-radius:13px;
  transition:transform .18s ease, box-shadow .18s ease, background .18s ease, opacity .18s ease}
.lr > div{padding:5px 8px;white-space:nowrap;min-width:0;overflow:hidden;text-overflow:ellipsis;
  font-variant-numeric:tabular-nums;font-weight:700}
.lr .c-rd{display:grid;place-items:center;padding:0}
.lr .c-n{text-align:right;font-weight:900;font-size:16px}
.lr .c-act{display:flex;justify-content:center}
.lr.unread{background:linear-gradient(162deg,var(--lite) -40%,var(--raised) 55%);
  box-shadow:var(--hard-sm), var(--soft-sm)}
.lr.unread:hover{transform:translate(-1px,-1px)}
.lr.read{background:var(--sunk);box-shadow:var(--well);border-color:var(--shade)}
.lr.read > div:not(.c-rd):not(.c-act){opacity:.62}
.lr.read .c-n{font-weight:800}
[data-theme="dark"] .lr.read{border-color:#0C0B0A}
.lr.accumulation.read{background:color-mix(in srgb, var(--sunk) 72%, var(--bad-tint))}
/* Every event carries its own colour, and how far it stands out follows how
   urgent it is, the same ranking as the mobile app. The two loudest ranks
   wear the colour on the whole border; the quieter ones keep the ink border
   and show a band down the left edge. Read rows stay flat and grey. */
.lr.unread.accumulation{--evc:var(--bad)}
.lr.unread.low_battery_shutdown{--evc:var(--orange);
  background:color-mix(in srgb, var(--orange) 22%, var(--raised));
  border-color:var(--orange);box-shadow:4px 4px 0 var(--orange), var(--soft-sm)}
.lr.unread.manual_shutdown{--evc:var(--orange);
  background:color-mix(in srgb, var(--orange) 12%, var(--raised));
  border-color:var(--orange);box-shadow:3px 3px 0 var(--orange), var(--soft-sm)}
.lr.unread.auto_muted{--evc:var(--warn);
  background:color-mix(in srgb, var(--warn) 16%, var(--raised));
  border-color:var(--warn);box-shadow:3px 3px 0 var(--warn), var(--soft-sm)}
.lr.unread.test{--evc:var(--warn);background:color-mix(in srgb, var(--warn) 10%, var(--raised))}
.lr.unread.manual{--evc:var(--teal);background:color-mix(in srgb, var(--teal) 10%, var(--raised))}
.lr.unread.muted,.lr.unread.unmuted{--evc:var(--purple);
  background:color-mix(in srgb, var(--purple) 8%, var(--raised));box-shadow:2px 2px 0 var(--edge), var(--soft-sm)}
.lr.unread.suppressed{--evc:var(--slate);
  background:color-mix(in srgb, var(--slate) 5%, var(--raised));box-shadow:2px 2px 0 var(--edge), var(--soft-sm)}
.lr.unread.test::before,.lr.unread.manual::before,.lr.unread.muted::before,
.lr.unread.unmuted::before,.lr.unread.suppressed::before{
  content:"";position:absolute;left:4px;top:7px;bottom:7px;width:5px;
  border-radius:5px;background:var(--evc)}
.lr.unread .dot{background:var(--evc, var(--teal));
  box-shadow:0 0 0 3px color-mix(in srgb, var(--evc, var(--teal)) 30%, transparent)}
/* A shutdown has no item count, and a "0" there reads as a real measurement. */
.lr .c-n .ico{width:17px;height:17px;color:var(--evc, var(--muted))}
.lr.urgent{background:linear-gradient(162deg,color-mix(in srgb,var(--bad-tint) 60%,var(--lite)) -30%,var(--bad-tint) 60%);
  border-color:var(--bad);
  box-shadow:4px 4px 0 var(--bad), var(--soft-sm);animation:urgent 1.9s ease-in-out infinite}
.lr.urgent::before{content:"";position:absolute;left:4px;top:7px;bottom:7px;width:5px;
  border-radius:5px;background:var(--bad)}
.lr.urgent .c-n{color:var(--bad);font-size:19px}
.lr.urgent > div{color:var(--text)}
@keyframes urgent{0%,100%{box-shadow:4px 4px 0 var(--bad), var(--soft-sm), 0 0 0 0 transparent}
  50%{box-shadow:4px 4px 0 var(--bad), var(--soft-sm), 0 0 0 5px var(--bad-tint)}}
.dot{width:15px;height:15px;border-radius:50%;padding:0;cursor:pointer;
  border:2px solid var(--edge);background:var(--teal);position:relative;
  box-shadow:0 0 0 3px color-mix(in srgb,var(--teal) 30%,transparent);transition:background .15s, box-shadow .15s, transform .15s}
.dot:active{transform:scale(.8)}
.dot::after{content:"";position:absolute;inset:-12px -10px}
.urgent .dot{background:var(--bad);box-shadow:0 0 0 3px var(--bad-tint);animation:pulse 1.4s ease-in-out infinite}
.read .dot{background:transparent;box-shadow:none;opacity:.5;animation:none}
.ev{display:inline-flex;align-items:center;gap:5px;font-weight:800;font-size:12px;
  padding:3px 10px;border:2px solid var(--edge);border-radius:999px;
  background:var(--raised);box-shadow:2px 2px 0 var(--edge)}
.ev .ico{width:13px;height:13px}
.ev.accumulation{background:var(--bad);color:#fff}
.urgent .ev.accumulation{font-size:13px;padding:4px 12px;box-shadow:3px 3px 0 var(--edge)}
```

```
.urgent .ev.accumulation .ico{animation:ring 1.1s ease-in-out infinite}
.ev.suppressed{background:var(--slate);color:#fff}
.ev.low_battery_shutdown,.ev.manual_shutdown{background:var(--orange);color:#fff}
.ev.test{background:var(--warn);color:#16130F}
.ev.manual{background:var(--teal);color:#fff}
.ev.muted{background:var(--purple);color:#fff}
.ev.auto_muted{background:var(--indigo);color:#fff}
.ev.unmuted{background:var(--ok);color:#fff}
[data-theme="dark"] .ev.muted,[data-theme="dark"] .ev.auto_muted,[data-theme="dark"] .ev.unmuted,
[data-theme="dark"] .ev.suppressed,[data-theme="dark"] .ev.low_battery_shutdown,[data-
theme="dark"] .ev.manual_shutdown{color:#16130F}
.rowbtns{display:flex;gap:5px}
.noimg{color:var(--muted);font-size:12px}
.pager{flex:none;display:flex;align-items:center;gap:8px;flex-wrap:wrap}
.pager .where{font-weight:800;font-size:12px}
.pager .sp{flex:1}
.empty{padding:22px;text-align:center;color:var(--muted);display:flex;
  flex-direction:column;align-items:center;gap:7px}
.empty .ico{width:26px;height:26px;opacity:.5}

/* ---------------- camera status ---------------- */
.pill.nocam{color:#9A6A00;animation:none}
.pill.nocam .ico{color:var(--warn);animation:breathe 1.6s ease-in-out infinite}
[data-theme="dark"] .pill.nocam{color:var(--warn)}
.screen.nosig #feed,#feed:not([src]){visibility:hidden}
.off{color:var(--text)}
.off.busy .ico{color:var(--teal);animation:spin 1s linear infinite}

/* ---------------- camera refresh ---------------- */
/* Tap: the arrows wind back and whip round once, then keep turning slowly
   until the camera answers. Hold: the outline fills over 5 s while the arrows
   spin up the other way and the button warms to amber; letting go early
   drains it back. */
.rfb{position:relative;overflow:visible;touch-action:none;user-select:none;-webkit-user-select:none}
.rfb .ico{overflow:visible}
.rfb .arr{transform-origin:12px 12px;transform-box:view-box}
.rfb .core{transform-origin:12px 12px;transform-box:view-box;transform:scale(0);
  fill:currentColor;stroke:none;transition:transform .25s ease}
.rfb .trace{position:absolute;inset:-6px;width:calc(100% + 12px);height:calc(100% + 12px);
  pointer-events:none;overflow:visible}
.rfb .trace rect{fill:none;stroke:var(--warn);stroke-width:3;stroke-linecap:round;
  stroke-dasharray:100;stroke-dashoffset:100;transition:stroke-dashoffset .3s ease, opacity .3s;
  opacity:0;filter:drop-shadow(0 0 3px var(--warn))}
.rfb.tap .arr{animation:rf-tap .75s cubic-bezier(.45,-.45,.3,1.35)}
.rfb.wait .arr{animation:spin 1.4s linear infinite}
.rfb.wait{color:var(--mon-fps)}
.rfb.hold{transition:background .2s;background:linear-gradient(180deg,#F9CF6A,var(--warn));color:#1E1A16}
.rfb.hold .arr{animation:rf-wind 5s cubic-bezier(.6,0,1,.6) forwards}
.rfb.hold .core{transform:scale(1);transition:transform 5s cubic-bezier(.5,0,.9,.4)}
.rfb.hold .trace rect{opacity:1;stroke-dashoffset:0;transition:stroke-dashoffset 5s linear, opacity .15s}
.rfb.done{animation:rf-done .5s ease-out}
@keyframes rf-tap{0%{transform:rotate(0)}22%{transform:rotate(-40deg)}100%{transform:rotate(360deg)}}
@keyframes rf-wind{from{transform:rotate(0)}to{transform:rotate(-2160deg)}}
@keyframes rf-done{0%{box-shadow:0 0 0 0 var(--warn)}100%{box-shadow:0 0 0 14px transparent}}
.hint.holdtip{color:var(--warn)!important}
[data-theme="dark"] .monitor .mon-top .hint.holdtip{color:#9A6A00!important}

/* full-page restart cover */
#reboot{position:fixed;inset:0;z-index:200;display:none;place-items:center;
  background:var(--base);color:var(--text)}
#reboot.on{display:grid;animation:rise .3s ease-out}
.rb{display:flex;flex-direction:column;align-items:center;gap:12px;text-align:center;padding:20px}
.rb .spin{width:64px;height:64px;border-radius:50%;border:5px solid var(--sunk);
  border-top-color:var(--teal);animation:spin .9s linear infinite;box-shadow:var(--soft-sm)}
.rb h2{margin:0;font-size:20px;font-weight:900}
.rb p{margin:0;color:var(--muted);font-weight:700;font-size:13px}
.rb .btn[hidden]{display:none}

/* ---------------- battery details ---------------- */
#batt{cursor:pointer;transition:transform .08s ease, box-shadow .08s ease}
#batt:active{transform:translate(3px,3px);box-shadow:var(--press)}
#batt:focus-visible{outline:3px solid var(--teal);outline-offset:2px}
#battDlg{width:min(560px,94vw)}
#phnDlg{width:min(720px,95vw)}
.pl{padding:12px 14px 14px;display:flex;flex-direction:column;gap:12px;max-height:calc(94vh -
60px);overflow:auto;
  -webkit-user-select:text;user-select:text}
.pc{border:2px solid var(--edge);border-radius:13px;padding:10px 12px;display:flex;flex-
direction:column;gap:9px;
  background:linear-gradient(162deg,var(--lite) -40%,var(--raised) 55%);box-shadow:var(--hard-sm), var(--
soft-sm);
```

```
}
.pl.fresh .pc{animation:rise .3s ease-out both}
.pc.app{border-left:7px solid var(--teal)} .pc.web{border-left:7px solid var(--c-bottle)}
.ph{display:flex;align-items:center;gap:10px}
.ph > div{flex:1;min-width:0}
.ph b{display:block;font-size:15px;font-weight:900;white-space:nowrap;overflow:hidden;text-overflow:ellipsis}
.ph small{font-size:11px;font-weight:700;color:var(--muted)}
.pb{width:36px;height:36px;border-radius:11px;display:grid;place-items:center;border:2px solid var(--edge);
  color:#fff;box-shadow:2px 2px 0 var(--edge)}
.app .pb{background:var(--teal)} .web .pb{background:var(--c-bottle)}
.pb .ico{width:19px;height:19px}
.pg{display:grid;grid-template-columns:1fr 1fr;gap:6px}
.pr{display:grid;grid-template-columns:18px auto 1fr;align-items:center;gap:6px;padding:5px 9px;border-radius:9px;
  background:var(--sunk);box-shadow:var(--well);border:2px solid var(--edge);min-width:0}
.pr .ico{width:14px;height:14px;color:var(--teal)}
.pr span{font-size:10.5px;font-weight:900;color:var(--muted);letter-spacing:.04em;text-transform:uppercase;white-space:nowrap}
.pr b{font-size:12.5px;font-weight:900;text-align:right;white-space:nowrap;overflow:hidden;text-overflow:ellipsis;
  font-variant-numeric:tabular-nums}
.tagx.via-direct{background:var(--ok-tint);color:#15703A} [data-theme="dark"] .tagx.via-direct{color:var(--ok)}
.tagx.via-shared{background:var(--warn-tint);color:#8A5A00} [data-theme="dark"] .tagx.via-shared{color:var(--warn)}
.tagx.via-remote{background:var(--purple-tint);color:var(--purple)}
.tagx.via-cloud{background:color-mix(in srgb,var(--orange) 18%,var(--raised));color:var(--orange)}
.pnote.via-cloud{background:color-mix(in srgb,var(--orange) 14%,var(--raised));color:var(--orange)}
.cl-chip{display:inline-flex;align-items:center;gap:5px}
.cl-chip .ico{width:13px;height:13px}
.cl-chip.on{background:color-mix(in srgb,var(--orange) 18%,var(--raised));color:var(--orange)}
.cl-chip.idle{background:color-mix(in srgb,var(--slate) 16%,var(--raised));color:var(--slate)}
.cl-chip.err{background:var(--bad-tint);color:var(--bad)}
.cl-chip.off{color:var(--muted)}
.use{display:flex;flex-direction:column;gap:5px;padding:9px 11px;border-radius:11px;border:2px solid var(--edge);
  background:var(--sunk);box-shadow:var(--well)}
.use-top{display:flex;align-items:center;gap:7px;font-size:11.5px;font-weight:900}
.use-top .ico{width:14px;height:14px;color:var(--orange)}
.use-top b{margin-left:auto;font-variant-numeric:tabular-nums}
.use-bar{height:9px;border-radius:5px;background:var(--well-bg,rgba(0,0,0,.18));overflow:hidden;border:1px solid var(--edge)}
.use-bar > i{display:block;height:100%;border-radius:5px;background:var(--ok);transition:width .4s ease}
.use.warn .use-bar > i{background:var(--warn)} .use.near .use-bar > i{background:var(--orange)}
.use.bad .use-bar > i{background:var(--bad)}
.use small{font-size:10.5px;font-weight:700;color:var(--muted)}
.use.near small, .use.bad small{color:var(--orange)}
.pc.cloud .pb{background:var(--orange)} .pc.app.cloud{border-left-color:var(--orange)}
.pnote{margin:0;display:flex;gap:7px;align-items:flex-start;padding:7px 10px;border-radius:10px;border:2px solid var(--edge);
  font-size:12px;font-weight:700}
.pnote .ico{width:15px;height:15px;flex:none;margin-top:1px}
.pnote.via-shared{background:var(--warn-tint);color:#8A5A00} [data-theme="dark"] .pnote.via-shared{color:var(--warn)}
.pnote.via-remote{background:var(--purple-tint);color:var(--purple)}
.pua{margin:0;font-size:10.5px;color:var(--muted);font-family:"DejaVu Sans Mono",ui-monospace,monospace;word-break:break-all}
.bd{padding:13px;display:flex;flex-direction:column;gap:12px}
.bd-hero{display:flex;align-items:center;gap:20px}
.bd .bt-cell{width:150px;height:66px;border-radius:13px;padding:4px;margin-right:10px}
.bd .bt-cell::after{right:-12px;top:20px;width:9px;height:22px;border-radius:0 6px 6px 0}
.bd .bt-cell .seg{inset:4px}
.bd .bt-fill{border-radius:8px}
.bd .bt-bolt{width:40px;height:40px;margin:-20px 0 0 -20px}
.bd-pct{margin:0;font-size:44px;font-weight:900;line-height:1;letter-spacing:-.03em;
  font-variant-numeric:tabular-nums}
.bd-pct small{font-size:18px;color:var(--muted);margin-left:2px}
.b-bad .bd-pct{color:var(--bad)}
.bd-src{margin:4px 0 0;font-size:13px;font-weight:700}
.bd-src b{font-weight:900}
.bd-wells{display:grid;grid-template-columns:repeat(3,1fr);gap:8px}
.well{border-radius:12px;background:var(--sunk);box-shadow:var(--well);border:2px solid var(--edge);
  padding:7px 10px}
.well .lb{display:block;font-size:9px;font-weight:900;letter-spacing:.08em;color:var(--muted)}
.well b{font-size:22px;font-weight:900;font-variant-numeric:tabular-nums}
.well small{font-size:11px;font-weight:800;color:var(--muted);margin-left:2px}
.well.neg b{color:#A35A00} [data-theme="dark"] .well.neg b{color:var(--warn)}
.well.pos b{color:var(--teal)}
.bd-lbl{margin:0 0 -6px;font-size:9px;font-weight:900;letter-spacing:.08em;color:var(--muted)}
.bd-cells{display:grid;grid-template-columns:repeat(4,1fr);gap:7px}
```

```
.cellv{border:2px solid var(--edge);border-radius:10px;padding:5px 8px;text-align:center;
  background:linear-gradient(162deg,var(--lite),var(--raised));box-shadow:2px 2px 0 var(--edge), var(--soft-sm)}
.cellv span{display:block;font-size:9px;font-weight:800;color:var(--muted)}
.cellv b{font-size:14px;font-weight:900;font-variant-numeric:tabular-nums}
.cellv.lowc{border-color:var(--bad)} .cellv.lowc b{color:var(--bad)}
.bd-note{margin:0;display:flex;gap:6px;align-items:flex-start;font-size:12px;font-weight:700;color:var(--muted)}
.bd-note .ico{width:14px;height:14px;flex:none;margin-top:1px}
.bd-note[hidden]{display:none}
.tagx{font-size:11px;font-weight:900;padding:3px 9px;border-radius:999px;border:2px solid var(--edge);
  white-space:nowrap}
.tagx.ok{background:var(--ok-tint);color:#15703A} [data-theme="dark"] .tagx.ok{color:var(--ok)}
.tagx.warn{background:var(--warn-tint);color:#8A5A00} [data-theme="dark"] .tagx.warn{color:var(--warn)}
.tagx.bad{background:var(--bad-tint);color:var(--bad)}

/* ---------------- dialogs ---------------- */
dialog{border:2px solid var(--edge);border-radius:19px;padding:0;background:var(--raised);
  color:var(--text);box-shadow:6px 6px 0 var(--edge), var(--soft);
  width:min(860px,95vw);max-height:94vh}
dialog::backdrop{background:rgba(10,8,6,.62)}
.vh{display:flex;align-items:center;gap:8px;padding:9px 11px;border-bottom:2px solid var(--edge)}
.vh h3{margin:0;font-size:15px;font-weight:900;flex:1;white-space:nowrap;overflow:hidden;
  text-overflow:ellipsis}
#viewer{width:min(990px,97vw)}
#viewer .vh .ev{flex:none}
.vb{display:grid;grid-template-columns:minmax(0,1fr) 248px;min-height:0}
.vshot{background:#0B0A09;display:grid;place-items:center;padding:8px;min-width:0;
  box-shadow:inset 0 0 22px rgba(0,0,0,.85)}
#vImg{display:block;width:100%;height:calc(94vh - 82px);object-fit:contain;border-radius:6px}
.vinfo{display:flex;flex-direction:column;gap:9px;padding:11px 12px;background:var(--base2);
  border-left:2px solid var(--edge);overflow:auto;-webkit-user-select:text;user-select:text}
.vi-items{border:2px solid var(--edge);border-radius:12px;padding:8px 10px;background:var(--raised);
  box-shadow:var(--hard-sm), var(--soft-sm)}
.vi-lb{display:flex;align-items:center;gap:5px;font-size:10px;font-weight:900;letter-spacing:.07em;
  text-transform:uppercase;color:var(--muted)}
.vi-lb .ico{width:13px;height:13px;color:var(--teal)}
.vi-big{display:flex;align-items:baseline;gap:6px;margin:2px 0 6px}
.vi-big b{font-size:34px;font-weight:900;letter-spacing:-.03em;font-variant-numeric:tabular-nums;line-height:1}
.vi-big span{font-size:12px;font-weight:800;color:var(--muted)}
.meter{display:block;height:10px;border-radius:999px;background:var(--sunk);box-shadow:var(--well);
  border:2px solid var(--edge);overflow:hidden}
.meter > i{display:block;height:100%;background:var(--ok);border-radius:999px;
  animation:grow .7s cubic-bezier(.3,1.2,.4,1) both;transform-origin:left}
@keyframes grow{from{transform:scaleX(0)}}
.lv-warn .meter > i{background:var(--warn)}
.lv-near .meter > i{background:var(--orange)}
.lv-bad .meter > i{background:var(--bad)}
.lv-bad .vi-big b{color:var(--bad)}
.vi-cls{display:flex;flex-direction:column;gap:6px}
.cl{display:grid;grid-template-columns:22px 1fr auto;align-items:center;gap:4px 7px;
  border:2px solid var(--edge);border-radius:10px;padding:5px 9px;background:var(--sunk);box-shadow:var(--well)}
.cl .ico{width:17px;height:17px}
.cl span{font-weight:800}
.cl b{font-size:17px;font-weight:900;font-variant-numeric:tabular-nums}
.cl .mini{grid-column:1/-1;height:5px;border-radius:999px;background:color-mix(in srgb,var(--shade) 40%,transparent);overflow:hidden}
.cl .mini > i{display:block;height:100%;border-radius:999px;animation:grow .7s ease both}
.cl.c-bottle .mini > i{background:var(--c-bottle)} .cl.c-bag .mini > i{background:var(--c-bag)} .cl.c-cont .mini > i{background:var(--c-cont)}
.cl.c-bottle,.cl.c-bag,.cl.c-cont{color:var(--text)}
.cl.c-bottle .ico{color:var(--c-bottle)} .cl.c-bag .ico{color:var(--c-bag)} .cl.c-cont .ico{color:var(--c-cont)}
.vi-row{display:grid;grid-template-columns:20px 1fr auto;align-items:center;gap:7px;font-size:12px;
  padding:3px 2px;border-bottom:1px dashed var(--shade)}
.vi-row:last-child{border-bottom:0}
.vi-row .ico{width:15px;height:15px;color:var(--muted)}
.vi-row span{color:var(--muted);font-weight:800}
.vi-row b{font-weight:900;font-size:13px;font-variant-numeric:tabular-nums}
.vi-row.conf .ico{color:var(--teal)} .vi-row.lim .ico{color:var(--orange)}
.vi-row.day .ico{color:var(--indigo)} .vi-row.tm .ico{color:var(--purple)}
#zoom{width:100vw;height:100vh;max-width:none;max-height:none;margin:0;border:0;
  border-radius:0;background:#0B0A09;box-shadow:none;overflow:hidden}
/* The picture takes the full screen height; the details sit in a slim rail
   beside it instead of a bar underneath, so nothing shrinks the photo. */
#zoom[open]{display:flex;flex-direction:row}
#zoom::backdrop{background:#0B0A09}
.zpic{position:relative;flex:none;height:100%;max-width:calc(100vw - 92px);display:grid;place-items:center;min-width:0;overflow:hidden}
```

```
#zImg{display:block;height:100vh;width:auto;max-width:calc(100vw - 92px);object-fit:contain;transform-origin:0 0}
.zbar{flex:1;min-width:92px;display:flex;flex-direction:column;align-items:center;justify-content:center;
  gap:10px;padding:10px 7px;background:var(--raised);border-left:2px solid var(--edge);color:var(--text);
  text-align:center}
.zbar .ev{flex-direction:column;gap:3px;white-space:normal;line-height:1.15;max-width:84px;padding:6px 7px}
.zinfo{display:flex;flex-direction:column;gap:6px;font-weight:800;font-size:13px;width:100%;align-items:center}
.zinfo span{display:flex;align-items:center;justify-content:center;gap:5px;min-width:64px;padding:3px 7px;
  border-radius:9px;background:var(--sunk);border:2px solid var(--edge);box-shadow:var(--well);
  font-variant-numeric:tabular-nums}
.zinfo span.zt{flex-direction:column;gap:1px;font-size:11px;line-height:1.2;background:none;border:0;box-shadow:none;
  color:var(--muted)}
.zinfo .ico{width:15px;height:15px;flex:none}
.zbar .zhint{color:var(--muted);font-size:10.5px;font-weight:700;line-height:1.3}
#zClose{flex-direction:column;gap:3px;min-height:58px;width:74px;padding:6px 4px;font-size:12px}
#zClose .ico{width:18px;height:18px}
#confirm{width:min(430px,94vw)}
.cfm{padding:13px;display:flex;flex-direction:column;gap:11px}
.cfm p{margin:0;font-size:13px}
.cfm .ico{width:34px;height:34px;color:var(--bad)}
.cfm .row{display:flex;align-items:center;gap:10px}
.cfm .acts{display:flex;gap:8px;justify-content:flex-end}
a.btn{text-decoration:none}

.toast{position:fixed;left:50%;bottom:14px;transform:translate(-50%,16px);opacity:0;
  background:var(--text);color:var(--base2);border:2px solid var(--edge);padding:8px 14px;
  border-radius:12px;font-weight:800;font-size:13px;pointer-events:none;z-index:40;
  box-shadow:4px 4px 0 var(--edge);transition:opacity .18s, transform .18s;
  display:flex;align-items:center;gap:7px}
.toast.show{opacity:1;transform:translate(-50%,0)}
.toast .ico{width:15px;height:15px}

@media (max-width:820px){
  html,body{overflow:auto}
  body{height:auto}
  .strip{grid-template-columns:1fr 1fr 1fr}
  .brand{grid-column:1/-1}
  .ctl{grid-column:1/-1;flex-direction:row}
  .ctl .pill,.ctl .btn{flex:1;justify-content:center}
  #monitor{flex-direction:column;gap:16px}
  .side{width:auto;padding-left:0}
  .monitor .screen{min-height:250px}
  .page{flex:1 1 auto}
  #history{min-height:430px}
}

/* settings page */
.setwrap{flex:1;min-width:0;min-height:0;display:flex;flex-direction:column;gap:12px;
  padding:0 6px 6px;overflow-y:auto;overscroll-behavior:contain;
  scrollbar-width:thin;scrollbar-color:var(--shade) transparent}
.setwrap::-webkit-scrollbar{width:9px}
.setwrap::-webkit-scrollbar-track{background:transparent}
.setwrap::-webkit-scrollbar-thumb{background:var(--shade);border-radius:999px}
.setgrid{flex:none;display:grid;align-items:start;gap:12px;
  grid-template-columns:repeat(auto-fit,minmax(300px,1fr))}
.setfoot{flex:none;display:flex;align-items:center;justify-content:space-between;gap:10px;
  padding:8px 2px 4px;position:sticky;bottom:-6px;background:var(--base);z-index:2}
.setfoot .hint{margin:0;display:flex;align-items:center;gap:6px;font-size:12px;font-weight:700;color:var(--muted)}
.setfoot .btn{min-width:140px;justify-content:center}

/* Settings: four even cards that fit one screen at 1024x600, no scrolling.
   Rows are compact (label beside its switch, or above its stepper bar) and
   the steppers and choice bars copy the mobile app: one outlined bar, the
   - and + keys raised at its ends, the value sunk between them. */
#settings .setwrap{gap:7px;padding:0 4px 2px}
#settings .setgrid{flex:1;min-height:0;align-items:stretch;gap:14px;
  grid-template-columns:repeat(auto-fit,minmax(220px,1fr))}
#settings .card-pow{padding:8px 10px;gap:6px;min-height:0;overflow:hidden}
#settings .card-pow .hd{margin-bottom:0}
#settings .card-pow[hidden]{display:none}
/* Buzzer and Quiet cards stay on screen, greyed out, until the Pi reports them. */
#settings .waitnote{display:none}
#settings .card-pow.wait .waitnote{display:flex}
#sndCard.wait #bzRepRow{display:none}
#settings .card-pow.wait > :not(.hd):not(.waitnote){opacity:.4;filter:grayscale(1);pointer-events:none}
#settings .card-pow.wait .hint.gen,#settings .card-pow.wait .hint.bad{display:none}
.c-scr .hd .ico{color:var(--indigo)}
.c-pow .hd .ico{color:var(--orange)}
```

```
.c-snd .hd .ico{color:#0F7BD4}
.c-qt .hd .ico{color:var(--purple)}
.c-cam .hd .ico{color:var(--teal)}
.c-mdl .hd .ico{color:var(--teal)}
/* the fourth column holds two short cards, Quiet hours above Camera stream */
#settings .setcol{display:flex;flex-direction:column;gap:9px;min-height:0;min-width:0;
  overflow-y:auto;overscroll-behavior:contain;scrollbar-width:thin;scrollbar-color:var(--shade)
transparent}
#settings .setcol > .card-pow{flex:none;overflow:visible}
/* Model card: the running version, then a new one to upload as a .zip or a folder */
.c-mdl .mdlrun{display:flex;align-items:baseline;gap:8px;min-width:0;margin:2px 0 0}
.c-mdl .mdlrun b{font-size:28px;font-weight:900;letter-spacing:-.01em;line-height:1.05;
  font-variant-numeric:tabular-nums}
.c-mdl .mdlrun span{font-size:11px;font-weight:800;color:var(--muted);min-width:0;
  overflow:hidden;text-overflow:ellipsis;white-space:nowrap}
.c-mdl .well input#mdlVer{font-size:15px;padding:5px 0}
.c-mdl .mdlbtns{display:flex;gap:6px;flex-wrap:wrap}
.c-mdl .mdlrow{display:flex;gap:6px;align-items:stretch;min-width:0}
.c-mdl .mdlrow .well{flex:1;min-width:0}
.c-mdl .mdlrow .btn{flex:none}
#settings .c-mdl .mdllbl{display:flex;align-items:center;gap:6px;margin:0;color:var(--muted);font-
size:10px;
  font-weight:900;letter-spacing:.06em;text-transform:uppercase;white-space:nowrap}
#settings .c-mdl .mdllbl .ico{width:12px;height:12px;flex:none}
.c-mdl .mdlbtns .btn{flex:1 1 0;min-width:0;white-space:nowrap;padding:5px 5px;gap:3px;font-size:11px}
.c-mdl .mdlbar{height:8px;border:2px solid var(--edge);border-radius:6px;background:var(--sunk);
  overflow:hidden;box-shadow:var(--well)}
.c-mdl .mdlbar i{display:block;height:100%;width:0;background:var(--teal);transition:width .2s}
.c-mdl .mdlbar.busy i{width:35%;animation:mdlslide 1.3s ease-in-out infinite}
@keyframes mdlslide{0%{transform:translateX(-100%)}100%{transform:translateX(290%)}}
.c-mdl .hint.good{color:var(--ok);font-weight:800}
.c-mdl .hint.good .ico{color:var(--ok)}
#settings .setcol .card-pow .hint{flex:none;overflow:visible}
#settings .setcol .c-qt .hint.gen{display:none}
#settings .setcol .c-qt .pair2{grid-template-columns:1fr 1fr}
#settings .c-qt .pfield.dim{opacity:.45;filter:grayscale(1);pointer-events:none}
/* Short label forms, used only in the five-column layout below. */
#settings .short{display:none}
/* On the Pi's 1024x600 screen Settings runs in five columns so nothing
   scrolls: Screen saver, Power, Buzzer, Camera stream over Quiet hours, Model.
   With the UPS HAT readout the Power card alone needs about 330 of the 362 px,
   so Quiet hours sits under Camera stream here and under Power everywhere else.
   The Quiet hours switch moves up beside the card title to save a row, the
   - and + keys get narrower, and a few labels use a shorter form. */
@media (min-width:980px) and (max-width:1279px){
  /* Camera stream and Quiet hours share the widest column, so the two quiet hour steppers fit side by side.
*/
  #settings .setgrid{grid-template-columns:minmax(0,1fr) minmax(0,1.05fr) minmax(0,1.05fr) minmax(0,1.15fr)
minmax(0,.75fr);
    grid-template-rows:auto minmax(0,1fr);gap:10px;
    grid-template-areas:"scr pow snd cam mdl" "scr pow snd qt mdl"}
  #settings .setcol{display:contents}
  #scrCard{grid-area:scr} #powCard{grid-area:pow} #sndCard{grid-area:snd}
  #camCard{grid-area:cam} #quietCard{grid-area:qt} #mdlCard{grid-area:mdl}
  #settings .card-pow:not(.c-qt) .stp .step{width:28px}
  #settings .card-pow .hd{gap:4px}
  /* The Model column is the narrowest, so the version field and Upload stack, and the export tip keeps
only the command. */
  #settings .c-mdl .mdlrow{flex-direction:column}
  #settings .c-mdl .mdlrow .btn{width:100%}
  #settings .c-qt{position:relative}
  #settings .c-qt .hd{padding-right:52px}
  #settings .c-qt > .prow{position:absolute;top:6px;right:10px;min-height:0}
  #settings .c-qt > .prow label{display:none}
  /* While the card has news to show, the export tip steps aside for it. */
  #settings #mdlNote:not([hidden]) ~ .hint.gen,#settings #mdlState:not([hidden]) ~ .hint.gen{display:none}
  /* A failed load is already explained by the note, so the red result line under it is not repeated. */
  #settings #mdlNote:not([hidden]) ~ #mdlState.bad{display:none}
  #settings .long{display:none}
  #settings .short{display:inline}
}
#settings .setcol .c-qt .pair2{gap:5px}
#settings .setcol .c-qt .stp .step{width:22px;font-size:16px}
#settings .setcol .c-qt .stp input[data-time]{font-size:11px;letter-spacing:-.02em;padding:0}
#settings .setcol .c-cam div.seg{height:30px}
#settings .grow{flex:1}
#settings .prow{margin:0;min-height:30px;gap:10px}
#settings .prow label,#settings .pfield label{display:flex;align-items:center;gap:6px;min-width:0;
  font-size:11px;font-weight:900;letter-spacing:.05em;text-transform:uppercase;white-space:nowrap}
#settings .prow label .ico,#settings .pfield label .ico{width:13px;height:13px;flex:none;color:var(--
muted)}
```

```
#settings .pfield label{margin:0 0 4px;color:var(--muted);font-size:10px}
#settings .pfield label .ico{width:12px;height:12px}
#settings .sw.lt{min-height:28px}
#settings .hint{margin:0;font-size:10px}
#settings .btn.wide{width:100%}
#settings .tests{margin:0;gap:6px}
#settings .pair2{display:grid;grid-template-columns:1fr;gap:6px}
#settings .setfoot{padding:4px 2px 0;position:static}
#settings .setfoot .btn{min-height:34px}
.chip{display:inline-flex;align-items:center;gap:4px;flex:none;padding:1px 7px;border-radius:999px;
  border:2px solid var(--edge);background:var(--ok-tint);font-size:9.5px;font-weight:900;
  letter-spacing:.06em;color:var(--text)}
.chip .ico{width:11px!important;height:11px!important;color:var(--ok)!important;animation:none!important}
.chip.off{background:var(--bad-tint)}
/* A chip marked off is not the video's "No camera signal" box, which shares the .off name. */
.chip.off{position:static;top:auto;left:auto;transform:none;z-index:auto;line-height:normal}
.chip[hidden]{display:none}

#settings .pfield[hidden],#settings .prow[hidden]{display:none}
.cells{display:grid;grid-template-columns:repeat(4,1fr);gap:5px}
.cells span{display:flex;align-items:baseline;justify-content:center;gap:1px;padding:5px 0;
  border:2px solid var(--edge);border-radius:9px;background:var(--sunk);box-shadow:inset 0 2px 5px
rgba(0,0,0,.14)}
.cells b{font-size:13px;font-weight:900;font-variant-numeric:tabular-nums}
.cells small{font-size:9px;font-weight:800;color:var(--muted)}
.cells span.lo b{color:#A35A00}
[data-theme="dark"] .cells span.lo b{color:var(--warn)}
#settings .pv{font-size:15px;font-weight:900;font-variant-numeric:tabular-nums}
/* settings switches: a pale sunk track when off, like the app */
#settings .sw.lt > i{background:var(--sunk);box-shadow:inset 2px 2px 4px var(--shade), inset -1px -1px 3px
var(--lite)}
#settings .sw.lt[aria-checked="true"] > i{background:var(--teal);box-shadow:inset 0 2px 4px rgba(0,0,0,.35),
0 0 8px rgba(23,166,143,.55)}

/* stepper bar */
.well.stp{display:flex;align-items:stretch;gap:0;padding:0;height:36px;border-radius:12px;overflow:hidden;
  background:var(--sunk);box-shadow:var(--soft-sm), inset 0 3px 6px rgba(0,0,0,.14)}
.prow .well.stp{width:150px;padding:0}
.stp .step{position:relative;z-index:1;width:40px;height:auto;border:0;border-radius:0;flex:none;
  font-size:19px;font-weight:800;color:var(--text);
  background:linear-gradient(180deg,var(--lite),var(--raised));
  box-shadow:inset 0 2px 0 rgba(255,255,255,.75), inset 0 -3px 0 var(--shade)}
.stp .step:first-child{border-right:2px solid var(--edge);
  box-shadow:inset 0 2px 0 rgba(255,255,255,.75), inset 0 -3px 0 var(--shade), 5px 0 8px -4px
rgba(0,0,0,.35)}
.stp .step:last-child{border-left:2px solid var(--edge);
  box-shadow:inset 0 2px 0 rgba(255,255,255,.75), inset 0 -3px 0 var(--shade), -5px 0 8px -4px
rgba(0,0,0,.35)}
.stp .step:hover{transform:none;filter:brightness(1.03)}
.stp .step:active{transform:none;background:var(--sunk);box-shadow:inset 3px 3px 7px var(--shade)}
.stp .step::after{inset:-6px 0}
#settings .stp input,.stp input{flex:1 1 0;min-width:0;width:0;text-align:center;font-size:16px;font-
weight:900;padding:0 0 0 36px;line-height:1;
  background:transparent}
.stp .u{width:36px;flex:none;align-self:center;text-align:left;line-height:1;margin:0;padding:0 0 0
2px;font-size:10px;font-weight:800;color:var(--muted)}
#settings .stp input[data-time]{font-size:14px;text-align:center;padding:0}
.stp input[data-time] + .u{display:none}
#settings .card-pow > *{flex-shrink:0}
#settings .card-pow > .grow{flex-shrink:1}
/* the clock note replaces the general tip, so the card never overflows */
#bzQuietNote:not([hidden]) ~ .hint.gen{display:none}
[data-theme="dark"] .stp{box-shadow:var(--soft-sm), inset 0 3px 7px rgba(0,0,0,.45)}
[data-theme="dark"] .stp .step{background:linear-gradient(180deg,#4F4841,#3D3832);
  box-shadow:inset 0 2px 0 rgba(255,255,255,.12), inset 0 -3px 0 rgba(0,0,0,.35)}
[data-theme="dark"] .stp .step:first-child{box-shadow:inset 0 2px 0 rgba(255,255,255,.12), inset 0 -3px 0
rgba(0,0,0,.35), 5px 0 8px -4px rgba(0,0,0,.7)}
[data-theme="dark"] .stp .step:last-child{box-shadow:inset 0 2px 0 rgba(255,255,255,.12), inset 0 -3px 0
rgba(0,0,0,.35), -5px 0 8px -4px rgba(0,0,0,.7)}
[data-theme="dark"] .stp .step:active{background:var(--sunk);box-shadow:inset 3px 3px 7px #000}

/* Choice bars, copied from the app: every group of options is one outlined
   bar, the cells split by ink lines. The chosen cell is raised and lit, the
   rest stay sunk and muted. Used for the screen saver mode, volume, strength,
   the History filters and date chips, and the theme switch. */
body :is(div.seg,.fbar){display:flex;align-items:stretch;gap:0;padding:0;height:34px;
  border:2px solid var(--edge);border-radius:12px;overflow:hidden;
  background:var(--sunk);box-shadow:var(--soft-sm), inset 0 3px 6px rgba(0,0,0,.14)}
body :is(div.seg,.fbar) button{flex:1 1 auto;display:flex;align-items:center;justify-
content:center;gap:5px;
  min-height:0;margin:0;padding:0 10px;border:0;border-radius:0;background:transparent;box-shadow:none;
```

```
  font:inherit;font-size:10.5px;font-weight:900;letter-spacing:.06em;text-transform:uppercase;
  color:var(--muted);white-space:nowrap;cursor:pointer;transition:background .15s, color .15s}
body :is(div.seg,.fbar) button + button{border-left:2px solid var(--edge)}
body :is(div.seg,.fbar) button .ico{width:14px;height:14px;opacity:.55}
body :is(div.seg,.fbar) button:active{transform:none;background:rgba(0,0,0,.06)}
body :is(div.seg,.fbar) button[aria-pressed="true"]{position:relative;z-index:1;color:var(--text);
  background:linear-gradient(180deg,var(--lite),var(--raised));
  box-shadow:inset 0 2px 0 rgba(255,255,255,.75), inset 0 -3px 0 var(--shade), 0 0 9px rgba(0,0,0,.3)}
body :is(div.seg,.fbar) button[aria-pressed="true"] .ico{opacity:1;color:var(--teal)}
[data-theme="dark"] :is(div.seg,.fbar){box-shadow:var(--soft-sm), inset 0 3px 7px rgba(0,0,0,.45)}
[data-theme="dark"] :is(div.seg,.fbar) button[aria-pressed="true"]{background:linear-
gradient(180deg,#4F4841,#3D3832);
  box-shadow:inset 0 2px 0 rgba(255,255,255,.12), inset 0 -3px 0 rgba(0,0,0,.35), 0 0 9px rgba(0,0,0,.7)}
body .fbar{flex:none}
body div.seg button{flex:1 1 0;min-width:0}
body .fbar.quick button{padding:0 9px}
#vPic[hidden]{display:none}
.cl-lb{font-size:10.5px;font-weight:900;letter-spacing:.06em;text-transform:uppercase;color:var(--
mut,#6b6259);white-space:nowrap}
.cl-use{font-size:11px;font-weight:800;color:var(--mut,#6b6259);white-space:nowrap;min-width:64px;margin-
right:4px}
/* Theme switch: icon only sun | moon bar. The raised thumb slides to the
   chosen side and the icon plays its entrance (sun spins up, moon swings in). */
.tsw{position:relative;display:flex;flex:none;width:86px;height:36px;padding:0;
  border:2px solid var(--edge);border-radius:12px;overflow:hidden;background:var(--sunk);
  box-shadow:inset 0 3px 7px rgba(0,0,0,.16)}
.tsw::before{content:"";position:absolute;top:0;bottom:0;left:0;width:50%;
  background:linear-gradient(180deg,var(--lite),var(--raised));
  box-shadow:0 0 0 2px var(--edge), inset 0 -3px 0 rgba(0,0,0,.08);
  transition:transform .45s cubic-bezier(.34,1.5,.64,1)}
[data-theme="dark"] .tsw{box-shadow:inset 0 3px 7px rgba(0,0,0,.45)}
[data-theme="dark"] .tsw::before{transform:translateX(100%);
  background:linear-gradient(180deg,#4F4841,#3D3832);
  box-shadow:0 0 0 2px var(--edge), inset 0 2px 0 rgba(255,255,255,.12), inset 0 -3px 0 rgba(0,0,0,.35)}
.tsw button{position:relative;z-index:1;flex:1 1 0;min-width:0;display:grid;place-items:center;
  margin:0;padding:0;border:0;border-radius:0;background:none;box-shadow:none;cursor:pointer;color:var(--
muted)}
.tsw svg{width:21px;height:21px;overflow:visible;display:block;
  transition:opacity .3s, transform .45s cubic-bezier(.34,1.5,.64,1), color .3s}
.tsw button[aria-pressed="false"] svg{opacity:.4;transform:scale(.78)}
.tsw .rays,.tsw .star{transform-box:fill-box;transform-origin:center}
.tsw .t-sun[aria-pressed="true"]{color:#E39400}
.tsw .t-sun[aria-pressed="true"] svg{filter:drop-shadow(0 0 4px rgba(240,170,20,.55));
  animation:tswSun .8s cubic-bezier(.34,1.5,.64,1)}
.tsw .t-sun[aria-pressed="true"] circle{fill:currentColor}
.tsw .t-sun[aria-pressed="true"] .rays{animation:tswRays .8s cubic-bezier(.34,1.5,.64,1)}
.tsw .t-moon[aria-pressed="true"]{color:#B4A6FF}
.tsw .t-moon[aria-pressed="true"] svg{filter:drop-shadow(0 0 5px rgba(170,150,255,.6));
  animation:tswMoon .8s cubic-bezier(.34,1.5,.64,1)}
.tsw .t-moon[aria-pressed="true"] .mn{fill:currentColor}
.tsw .t-moon[aria-pressed="true"] .star{animation:tswStar 2.6s ease-in-out .5s infinite}
.tsw .t-moon[aria-pressed="false"] .star{opacity:0}
.tsw:hover .t-sun[aria-pressed="true"] .rays{animation:tswSpin 5s linear infinite}
.tsw:hover .t-moon[aria-pressed="true"] svg{animation:tswRock 2s ease-in-out infinite}
.tsw button:active svg{transform:scale(.86)}
@keyframes tswSun{0%{transform:rotate(-180deg) scale(.4)}100%{transform:none}}
@keyframes tswRays{0%{transform:scale(.3);opacity:0}60%{opacity:1}100%{transform:none}}
@keyframes tswMoon{0%{transform:rotate(-70deg) scale(.4)}100%{transform:none}}
@keyframes tswStar{0%,100%{transform:scale(1);opacity:1}50%{transform:scale(.4) rotate(45deg);opacity:.35}}
@keyframes tswSpin{to{transform:rotate(360deg)}}
@keyframes tswRock{0%,100%{transform:rotate(0)}50%{transform:rotate(-14deg)}}
@media (prefers-reduced-motion:reduce){.tsw
*, .tsw::before{animation:none!important;transition:none!important}}

/* power card, screen saver layer, shutdown banner */
.card-pow{flex:none}
.card-pow .hd .ico{color:var(--orange)}
.sw.lt{color:var(--text);padding:0}
.sw.lt[aria-checked="true"]{color:var(--text)}
.prow{display:flex;align-items:center;justify-content:space-between;gap:8px;margin:6px 0 4px}
.prow .well{width:168px;flex:none;padding-left:8px}
.prow .well input{font-size:15px;text-align:right}
.card-pow .sub{font-size:10px;font-weight:900;letter-spacing:.08em;text-transform:uppercase;color:var(--
muted);
  margin:8px 0 3px;display:flex;align-items:center;gap:5px}
.card-pow .sub .ico{width:12px;height:12px}
.sndgrid{display:grid;grid-template-columns:1fr 1fr;gap:0 30px}
.sndcol{min-width:0}
.sndcol .seg{margin:4px 0 6px}
.tests{display:flex;gap:8px;margin-top:4px}
.tests .btn{flex:1;justify-content:center}
```

```
.tests[hidden]{display:none}
.prow .well input[data-time]{font-size:14px}
@media (max-width:700px){.sndgrid{grid-template-columns:1fr}}
.card-pow .hint{margin-top:10px}
.card-pow .hint[hidden]{display:none}
.card-pow .hint.bad{color:var(--bad);font-weight:800}
.card-pow .hint.bad .ico{color:var(--bad)}
#saver{position:fixed;inset:0;width:100vw;height:100vh;max-width:none;max-height:none;margin:0;padding:0;
  border:0;background:#000;overflow:hidden;cursor:default;touch-action:none}
#saver[hidden]{display:none}
#pwrBanner{position:fixed;inset:0 0 auto 0;width:100%;height:auto;max-width:none;margin:0;
  padding:10px 16px;border:0;border-bottom:3px solid var(--edge);background:var(--bad);color:#fff;
  display:flex;align-items:center;gap:14px;box-shadow:0 6px 18px rgba(0,0,0,.4)}
#pwrBanner[hidden]{display:none}
#pwrBanner .ico{width:30px;height:30px;flex:none;animation:ring .9s ease-in-out infinite;transform-
origin:center}
#pwrBanner .pb-txt{flex:1;min-width:0;display:flex;flex-direction:column;gap:2px}
#pwrBanner b{font-size:22px;font-weight:900;font-variant-numeric:tabular-nums;line-height:1.1}
#pwrBanner span{font-size:13px;font-weight:700;opacity:.95}
#pwrBanner .btn{min-height:50px;min-width:130px;font-size:16px;color:var(--text)}
#pwrBanner.floor{animation:alarm 1.2s ease-in-out infinite}
</style>
</head>
<body>

<svg style="display:none" aria-hidden="true">
  <symbol fill="none" stroke="currentColor" stroke-width="2" stroke-linecap="round" stroke-linejoin="round"
id="i-shield" viewBox="0 0 24 24">
    <path d="M12 2.6 20 6v6c0 4.6-3.3 8.4-8 9.4C7.3 20.4 4 16.6 4 12V6z"/>
    <path class="wave" d="M7.6 12.6c1.3-1 2.2-1 3.4 0s2.1 1 3.4 0 2.2-1 3.4 0"/>
  </symbol>
  <symbol id="i-cloudidle" viewBox="0 0 24 24" fill="none" stroke="currentColor" stroke-width="2" stroke-
linecap="round" stroke-linejoin="round"><path d="M7 18.5h10.5a4 4 0 0 0 .6-7.95A6 6 0 0 0 6.6 9.1 4.7 4.7 0
0 0 7 18.5z"/><path d="M10.5 12v3.5M13.5 12v3.5"/></symbol><symbol id="i-clouderr" viewBox="0 0 24 24"
fill="none" stroke="currentColor" stroke-width="2" stroke-linecap="round" stroke-linejoin="round"><path
d="M7 18.5h10.5a4 4 0 0 0 .6-7.95A6 6 0 0 0 6.6 9.1 4.7 4.7 0 0 0 7 18.5z"/><path d="M12 11.2v2.9M12
16.4v.1"/></symbol><symbol id="i-cloudoff" viewBox="0 0 24 24" fill="none" stroke="currentColor" stroke-
width="2" stroke-linecap="round" stroke-linejoin="round"><path d="M7 18.5h10.5a4 4 0 0 0 .6-7.95A6 6 0 0 0
6.6 9.1 4.7 4.7 0 0 0 7 18.5z"/><path d="M3 3l18 18"/></symbol><symbol id="i-cloud" viewBox="0 0 24 24"
fill="none" stroke="currentColor" stroke-width="2" stroke-linecap="round" stroke-linejoin="round"><path
d="M7 18.5h10.5a4 4 0 0 0 .6-7.95A6 6 0 0 0 6.6 9.1 4.7 4.7 0 0 0 7 18.5z"/></symbol><symbol fill="none"
stroke="currentColor" stroke-width="2" stroke-linecap="round" stroke-linejoin="round" id="i-phone"
viewBox="0 0 24 24"><rect x="6.5" y="2.5" width="11" height="19" rx="2.4"/><path d="M11
18.5h2"/></symbol><symbol fill="none" stroke="currentColor" stroke-width="2" stroke-linecap="round" stroke-
linejoin="round" id="i-phoneoff" viewBox="0 0 24 24"><path d="M8.6 2.6h6.5a2.4 2.4 0 0 1 2.4 2.4v9.4M17.4
19.4a2.4 2.4 0 0 1-2.3 2.1H8.9a2.4 2.4 0 0 1-2.4-2.4V6.7"/><path d="M3 3l18 18"/></symbol><symbol
fill="none" stroke="currentColor" stroke-width="2" stroke-linecap="round" stroke-linejoin="round" id="i-
bottle" viewBox="0 0 24 24"><path d="M10 2.6h4M10.6 2.6v3.1L8.5 8.7a3 3 0 0 0-.5 1.6V20a1.6 1.6 0 0 0 1.6
1.6h4.8A1.6 1.6 0 0 0 16 20v-9.7a3 3 0 0 0-.5-1.6l-2.1-3V2.6"/><path d="M8 13.5h8"/></symbol><symbol
fill="none" stroke="currentColor" stroke-width="2" stroke-linecap="round" stroke-linejoin="round" id="i-
bag" viewBox="0 0 24 24"><path d="M5.4 8.2h13.2l-1 12a1.5 1.5 0 0 1-1.5 1.3H7.9a1.5 1.5 0 0 1-1.5-
1.3z"/><path d="M9 8.2V6.6a3 3 0 0 1 6 0v1.6"/></symbol><symbol fill="none" stroke="currentColor" stroke-
width="2" stroke-linecap="round" stroke-linejoin="round" id="i-cont" viewBox="0 0 24 24"><path d="M3.6
9.4h16.8l-1.5 10a1.4 1.4 0 0 1-1.4 1.2H6.5a1.4 1.4 0 0 1-1.4-1.2z"/><path d="M2.6 9.4h18.8M7 9.4l1.6-
4.6h6.8L17 9.4"/></symbol><symbol fill="none" stroke="currentColor" stroke-width="2" stroke-linecap="round"
stroke-linejoin="round" id="i-belloff" viewBox="0 0 24 24"><path d="M8.6 4.4A6 6 0 0 1 18 9.4c0 3.3.9 5.3
1.7 6.4M6.1 7A6 6 0 0 0 6 9.4c0 4.5-1.6 6.6-2 7.1h12.4"/><path d="M10.2 19.8a2 2 0 0 0 3.6 0"/><path d="M3
3l18 18"/></symbol><symbol fill="none" stroke="currentColor" stroke-width="2" stroke-linecap="round"
stroke-linejoin="round" id="i-bellauto" viewBox="0 0 24 24"><path d="M14.6 16.5H4s2-2 2-7.1a6 6 0 0 1 9.4-
4.9"/><path d="M10.2 19.8a2 2 0 0 0 3.6 0"/><circle cx="17.6" cy="12.6" r="4.1"/><path d="M17.6
10.6v2.2l1.5 1"/></symbol><symbol fill="none" stroke="currentColor" stroke-width="2" stroke-linecap="round"
stroke-linejoin="round" id="i-bellon" viewBox="0 0 24 24"><path d="M6 9.4a6 6 0 0 1 12 0c0 4.5 1.6 6.6 2
7.1H4c.4-.5 2-2.6 2-7.1z"/><path d="M10.2 19.8a2 2 0 0 0 3.6 0"/><path d="M2.6 7a8.4 8.4 0 0 1 2.1-3.5M21.4
7a8.4 8.4 0 0 0-2.1-3.5"/></symbol><symbol fill="none" stroke="currentColor" stroke-width="2" stroke-
linecap="round" stroke-linejoin="round" id="i-gauge" viewBox="0 0 24 24"><path d="M3.5 17.5a8.5 8.5 0 1 1
17 0"/><path d="M12 17.5l4.6-5.2"/><circle cx="12" cy="17.5" r="1.3"/></symbol><symbol fill="none"
stroke="currentColor" stroke-width="2" stroke-linecap="round" stroke-linejoin="round" id="i-mail"
viewBox="0 0 24 24"><rect x="3" y="5.5" width="18" height="13" rx="2.2"/><path d="m3.6 7.2 8.4 6 8.4-
6"/></symbol><symbol fill="none" stroke="currentColor" stroke-width="2" stroke-linecap="round" stroke-
linejoin="round" id="i-tag" viewBox="0 0 24 24"><path d="M3.5 12.2V4.6a1.1 1.1 0 0 1 1.1-1.1h7.6l8.3
8.3a1.4 1.4 0 0 1 0 2l-6.6 6.6a1.4 1.4 0 0 1-2 0z"/><circle cx="8" cy="8" r="1.5"/></symbol><symbol
fill="none" stroke="currentColor" stroke-width="2" stroke-linecap="round" stroke-linejoin="round" id="i-
layers" viewBox="0 0 24 24"><path d="M12 3 2.6 7.9 12 12.8l9.4-4.9z"/><path d="m2.6 12.2 9.4 4.9 9.4-
4.9M2.6 16.3l9.4 4.9 9.4-4.9"/></symbol><symbol fill="none" stroke="currentColor" stroke-width="2" stroke-
linecap="round" stroke-linejoin="round" id="i-image" viewBox="0 0 24 24"><rect x="3" y="4.5" width="18"
height="15" rx="2.2"/><circle cx="8.6" cy="9.6" r="1.8"/><path d="m21 15.6-5-5-9.2 8.9"/></symbol><symbol
fill="none" stroke="currentColor" stroke-width="2" stroke-linecap="round" stroke-linejoin="round" id="i-
target" viewBox="0 0 24 24"><circle cx="12" cy="12" r="8.6"/><circle cx="12" cy="12" r="4.6"/><circle
cx="12" cy="12" r="1"/></symbol><symbol fill="none" stroke="currentColor" stroke-width="2" stroke-
linecap="round" stroke-linejoin="round" id="i-flag" viewBox="0 0 24 24"><path d="M5 21V4M5 4.5h11.5l-2.2
4.2 2.2 4.2H5"/></symbol><symbol fill="none" stroke="currentColor" stroke-width="2" stroke-linecap="round"
```

```
    stroke-linejoin="round" id="i-cal" viewBox="0 0 24 24"><rect x="3.5" y="5" width="17" height="15.5"
    rx="2.2"/><path d="M3.5 9.8h17M8 3v4M16 3v4"/></symbol><symbol fill="none" stroke="currentColor" stroke-
    width="2" stroke-linecap="round" stroke-linejoin="round" id="i-act" viewBox="0 0 24 24"><circle cx="5.5"
    cy="12" r="1.3"/><circle cx="12" cy="12" r="1.3"/><circle cx="18.5" cy="12" r="1.3"/></symbol>
1398  <symbol fill="none" stroke="currentColor" stroke-width="2" stroke-linecap="round" stroke-linejoin="round"
    id="i-camoff" viewBox="0 0 24 24"><path d="M3 3l18 18"/><path d="M9.5 6H14l1.6 2.2H19a2 2 0 0 1 2
    2v7.3M17.8 19H5a2 2 0 0 1-2-2v-6.8a2 2 0 0 1 2-2h1.6"/><path d="M10.3 10.6a3 3 0 0 0 4 4"/></symbol>
1399  <symbol fill="none" stroke="currentColor" stroke-width="2" stroke-linecap="round" stroke-linejoin="round"
    id="i-cam" viewBox="0 0 24 24">
1400    <rect x="2.5" y="6" width="19" height="13" rx="3"/>
1401    <path d="M8.5 6l1.4-2.3h4.2L15.5 6"/>
1402    <circle class="lens" cx="12" cy="12.6" r="3.4"/>
1403  </symbol>
1404  <symbol fill="none" stroke="currentColor" stroke-width="2" stroke-linecap="round" stroke-linejoin="round"
    id="i-gear" viewBox="0 0 24 24">
1405    <g class="gear"><circle cx="12" cy="12" r="3.1"/>
1406    <path d="M12 2.6v2.6M12 18.8v2.6M21.4 12h-2.6M5.2 12H2.6M18.6 5.4l-1.8 1.8M7.2 16.8l-1.8 1.8M18.6
    18.6l-1.8-1.8M7.2 7.2 5.4 5.4"/></g>
1407  </symbol>
1408  <symbol fill="none" stroke="currentColor" stroke-width="2" stroke-linecap="round" stroke-linejoin="round"
    id="i-poly" viewBox="0 0 24 24">
1409    <polygon class="poly" points="4,8 13,4 20,10 17,19 7,18"/>
1410    <circle fill="currentColor" stroke="none" cx="4" cy="8" r="1.9"/><circle fill="currentColor"
    stroke="none" cx="13" cy="4" r="1.9"/>
1411    <circle fill="currentColor" stroke="none" cx="20" cy="10" r="1.9"/><circle fill="currentColor"
    stroke="none" cx="7" cy="18" r="1.9"/>
1412  </symbol>
1413  <symbol fill="none" stroke="currentColor" stroke-width="2" stroke-linecap="round" stroke-linejoin="round"
    id="i-clock" viewBox="0 0 24 24">
1414    <circle cx="12" cy="12" r="8.6"/><path class="hand" d="M12 7.2V12l3.4 2.1"/>
1415  </symbol>
1416  <symbol fill="none" stroke="currentColor" stroke-width="2" stroke-linecap="round" stroke-linejoin="round"
    id="i-sunmoon" viewBox="0 0 24 24">
1417    <g class="sun"><circle cx="8.4" cy="12" r="3.3"/>
1418      <path d="M8.4 5.2v1.4M8.4 17.4v1.4M1.6 12H3M13.8 12h1.4M3.6 7.2l1 1M12.2 15.8l1 1M12.6 8.2l1-1M3.6
    16.8l1-1"/></g>
1419    <g class="moon"><path d="M22 14.6a5.4 5.4 0 0 1-6.9-6.9 5.6 5.6 0 1 0 6.9 6.9z"/></g>
1420  </symbol>
1421  <symbol fill="none" stroke="currentColor" stroke-width="2" stroke-linecap="round" stroke-linejoin="round"
    id="i-signal" viewBox="0 0 24 24">
1422    <path d="M4.4 15.2a10.6 10.6 0 0 1 15.2 0"/><path d="M7.8 18.3a6 6 0 0 1 8.4 0"/>
1423    <circle fill="currentColor" stroke="none" cx="12" cy="20.6" r="1.8"/>
1424  </symbol>
1425  <symbol fill="none" stroke="currentColor" stroke-width="2" stroke-linecap="round" stroke-linejoin="round"
    id="i-nolink" viewBox="0 0 24 24">
1426    <path d="M9.6 14.4 7.4 16.6a3.6 3.6 0 0 1-5.1-5.1l2.4-2.4"/>
1427    <path d="M14.4 9.6l2.2-2.2a3.6 3.6 0 0 1 5.1 5.1l-2.4 2.4"/>
1428    <path d="M3.2 3.2l17.6 17.6"/>
1429  </symbol>
1430  <symbol fill="none" stroke="currentColor" stroke-width="2" stroke-linecap="round" stroke-linejoin="round"
    id="i-bell" viewBox="0 0 24 24">
1431    <path d="M18 9.4a6 6 0 1 0-12 0c0 6.1-2.3 7.4-2.3 7.4h16.6S18 15.5 18 9.4"/>
1432    <path d="M13.7 20.4a2 2 0 0 1-3.4 0"/>
1433  </symbol>
1434  <symbol fill="none" stroke="currentColor" stroke-width="2" stroke-linecap="round" stroke-linejoin="round"
    id="i-check" viewBox="0 0 24 24"><path d="M4.4 12.6 9.6 18 19.8 6.6"/></symbol>
1435  <symbol fill="none" stroke="currentColor" stroke-width="2" stroke-linecap="round" stroke-linejoin="round"
    id="i-save" viewBox="0 0 24 24">
1436    <path d="M4.5 4.5h12L19.5 7.5v12h-15z"/><path d="M8 4.5v5h7v-5"/><rect x="8" y="13" width="7"
    height="6.5"/>
1437  </symbol>
1438  <symbol fill="none" stroke="currentColor" stroke-width="2" stroke-linecap="round" stroke-linejoin="round"
    id="i-shutter" viewBox="0 0 24 24">
1439    <rect x="2.5" y="6.5" width="19" height="13.5" rx="3"/>
1440    <path d="M8.6 6.5 10 3.9h4l1.4 2.6"/>
1441    <circle class="shutter" cx="12" cy="13.2" r="3.6"/>
1442  </symbol>
1443  <symbol fill="none" stroke="currentColor" stroke-width="2" stroke-linecap="round" stroke-linejoin="round"
    id="i-pen" viewBox="0 0 24 24">
1444    <path class="draw" d="M3.5 20.5l1-4.4L15.6 5a2.3 2.3 0 0 1 3.3 3.3L7.9 19.5z"/>
1445    <path d="M14 6.6l3.4 3.4"/>
1446  </symbol>
1447  <symbol fill="none" stroke="currentColor" stroke-width="2" stroke-linecap="round" stroke-linejoin="round"
    id="i-edit" viewBox="0 0 24 24">
1448    <path d="M12.6 4.6H4.4v15h15v-8.2"/><path d="M17.4 3.2 20.8 6.6 12 15.4l-4 .6.6-4z"/>
1449  </symbol>
1450  <symbol fill="none" stroke="currentColor" stroke-width="2" stroke-linecap="round" stroke-linejoin="round"
    id="i-eraser" viewBox="0 0 24 24">
1451    <path d="M8.2 20.4H20"/><path d="M15.4 3.8 20.2 8.6a1.8 1.8 0 0 1 0 2.6l-8 8H6.6l-3-3a1.8 1.8 0 0 1 0-
    2.6l9.2-9.8a1.8 1.8 0 0 1 2.6 0z"/>
1452  </symbol>
```

```
  <symbol fill="none" stroke="currentColor" stroke-width="2" stroke-linecap="round" stroke-linejoin="round" id="i-undo" viewBox="0 0 24 24">
    <path class="nudge-l" d="M9.6 6.4 4 12l5.6 5.6"/><path d="M4 12h10.4a5.6 5.6 0 0 1 0 11.2"/>
  </symbol>
  <symbol fill="none" stroke="currentColor" stroke-width="2" stroke-linecap="round" stroke-linejoin="round" id="i-refresh" viewBox="0 0 24 24">
    <g class="spin" style="transform-origin:12px 12px">
    <path d="M20.4 12a8.4 8.4 0 1 1-2.5-6"/><path d="M20.6 4.4v5.2h-5.2"/></g>
  </symbol>
  <symbol fill="none" stroke="currentColor" stroke-width="2" stroke-linecap="round" stroke-linejoin="round" id="i-trash" viewBox="0 0 24 24">
    <g class="lid"><path d="M3.6 6.4h16.8"/><path d="M9.2 6.4V4.2h5.6v2.2"/></g>
    <path d="M5.6 6.4h12.8l-1 14H6.6z"/><path d="M10.2 10.4v6M13.8 10.4v6"/>
  </symbol>
  <symbol fill="none" stroke="currentColor" stroke-width="2" stroke-linecap="round" stroke-linejoin="round" id="i-prev" viewBox="0 0 24 24"><path class="nudge-l" d="M14.6 5.4 8 12l6.6 6.6"/></symbol>
  <symbol fill="none" stroke="currentColor" stroke-width="2" stroke-linecap="round" stroke-linejoin="round" id="i-next" viewBox="0 0 24 24"><path class="nudge-r" d="M9.4 5.4 16 12l-6.6 6.6"/></symbol>
  <symbol fill="none" stroke="currentColor" stroke-width="2" stroke-linecap="round" stroke-linejoin="round" id="i-warn" viewBox="0 0 24 24">
    <path d="M12 3.6 22 20.4H2z"/><path d="M12 9.6v4.6"/><circle fill="currentColor" stroke="none" cx="12" cy="17.4" r="1.2"/>
  </symbol>
  <symbol fill="none" stroke="currentColor" stroke-width="2" stroke-linecap="round" stroke-linejoin="round" id="i-ok" viewBox="0 0 24 24"><circle cx="12" cy="12" r="8.6"/><path d="M8.2 12.4 11 15.2l5-5.6"/></symbol>
  <symbol fill="none" stroke="currentColor" stroke-width="2" stroke-linecap="round" stroke-linejoin="round" id="i-up" viewBox="0 0 24 24"><path d="M12 19V6"/><path class="pop" d="M6.4 11.6 12 6l5.6 5.6"/></symbol>
  <symbol fill="none" stroke="currentColor" stroke-width="2" stroke-linecap="round" stroke-linejoin="round" id="i-eye" viewBox="0 0 24 24">
    <path d="M1.8 12S5.6 5.4 12 5.4 22.2 12 22.2 12 18.4 18.6 12 18.6 1.8 12 1.8 12"/>
    <circle class="lens" cx="12" cy="12" r="3.1"/>
  </symbol>
  <symbol fill="none" stroke="currentColor" stroke-width="2" stroke-linecap="round" stroke-linejoin="round" id="i-eyeoff" viewBox="0 0 24 24">
    <path d="M3 3l18 18"/><path d="M10.6 6a9.6 9.6 0 0 1 11.6 6 12 12 0 0 1-2.6 3.5"/>
    <path d="M6.4 7.6A12.2 12.2 0 0 0 1.8 12S5.6 18.6 12 18.6a9.4 9.4 0 0 0 3.2-.55"/>
  </symbol>
  <symbol fill="none" stroke="currentColor" stroke-width="2" stroke-linecap="round" stroke-linejoin="round" id="i-box" viewBox="0 0 24 24">
    <path d="M3.6 7.4 12 3.4l8.4 4v9.2L12 20.6l-8.4-4z"/><path d="M3.6 7.4 12 11.5l8.4-4.1M12 11.5v9.1"/>
  </symbol>
  <symbol fill="none" stroke="currentColor" stroke-width="2" stroke-linecap="round" stroke-linejoin="round" id="i-plug" viewBox="0 0 24 24">
    <path d="M9 3v4M15 3v4"/><path d="M6.5 7h11v3.5a5.5 5.5 0 0 1-11 0z"/><path d="M12 16v5"/>
  </symbol>
  <symbol fill="none" stroke="currentColor" stroke-width="2" stroke-linecap="round" stroke-linejoin="round" id="i-batt" viewBox="0 0 24 24">
    <rect x="2.5" y="7" width="17" height="10" rx="2.4"/><path d="M21.5 10.5v3"/><path d="M6 10.5v3M9.5 10.5v3"/>
  </symbol>
  <symbol fill="none" stroke="currentColor" stroke-width="2" stroke-linecap="round" stroke-linejoin="round" id="i-power" viewBox="0 0 24 24">
    <path d="M12 3v8"/><path d="M6.3 6.8a8 8 0 1 0 11.4 0"/>
  </symbol>
  <symbol stroke-linejoin="round" id="i-bolt" viewBox="0 0 24 24">
    <path fill="currentColor" d="M13.4 2.5 5 13.6h6l-1.4 7.9L19 10.3h-6.1z"/>
  </symbol>
  <symbol fill="none" stroke="currentColor" stroke-width="2" stroke-linecap="round" stroke-linejoin="round" id="i-mini" viewBox="0 0 24 24">
    <rect x="3" y="3" width="18" height="18" rx="3.4"/>
    <g class="m-arr"><path d="M8 8l6.6 6.6"/><path d="M15.2 9.6v5.6H9.6"/></g>
  </symbol>
  <symbol fill="none" stroke="currentColor" stroke-width="2" stroke-linecap="round" stroke-linejoin="round" id="i-wrench" viewBox="0 0 24 24">
    <path d="M15.6 3.4a5.4 5.4 0 0 0-5.1 7.1L3.4 17.6l3 3 7.1-7.1a5.4 5.4 0 0 0 6.9-6.6l-3.1 3.1-2.9-.6-.6-2.9z"/>
  </symbol>
  <symbol fill="none" stroke="currentColor" stroke-width="2" stroke-linecap="round" stroke-linejoin="round" id="i-x" viewBox="0 0 24 24"><path d="M6 6l12 12M18 6L6 18"/></symbol>
</svg>

<div id="app">
<header class="strip">
  <div class="brand" id="brand" title="Garbage-Guard">
    <span class="logo">
      <img class="lg-light" src="_PNG_BASE64_PLACEHOLDER" alt="Garbage-Guard">
      <img class="lg-dark" src="_PNG_BASE64_PLACEHOLDER" alt="">
    </span>
  </div>

  <!-- Level box. setLevel() rewrites its class (lv-ok, lv-warn, lv-near, lv-bad, lv-muted) and
```

```
       the bar width on every poll. -->
  <div class="box level lv-ok" id="level">
    <div class="bar" id="bar"></div>
    <div class="inner">
      <p class="k" id="pctTag">0% of limit</p>
      <p class="big"><span id="total">0</span> <span>of <b id="limit">20</b> items</span></p>
      <p class="state"><svg class="ico" id="stateIco"><use href="#i-ok"/></svg>
        <span id="state">Normal</span></p>
    </div>
  </div>

  <!-- Per-class counts inside the ROI, from state.counts. bump() replays the pulse animation
       only when a value changes. -->
  <div class="box" id="boxBottle"><p class="k"><svg class="ico c-bottle"><use href="#i-
bottle"/></svg>Bottle</p>
    <p class="v" id="nBottle">0</p></div>
  <div class="box" id="boxBag"><p class="k"><svg class="ico c-bag"><use href="#i-bag"/></svg>Bag</p>
    <p class="v" id="nBag">0</p></div>
  <div class="box" id="boxCont"><p class="k"><svg class="ico c-cont"><use href="#i-
cont"/></svg>Container</p>
    <p class="v" id="nCont">0</p></div>
  <div class="box"><p class="k"><svg class="ico"><use href="#i-clock"/></svg>Latency</p>
    <p class="v"><span id="lat">–</span><small> ms</small></p>
    <p class="k">Avg <span id="latAvg">–</span> ms</p></div>

  <div class="box batt b-none" id="batt" data-snd="open" title="Battery details" role="button" tabindex="0"
aria-haspopup="dialog">
    <p class="k"><svg class="ico" id="battIco"><use href="#i-batt"/></svg><span
id="battSrc">Battery</span></p>
    <div class="bt-row">
      <span class="bt-cell" aria-hidden="true"><i class="bt-fill" id="battFill"></i><i class="seg"></i>
        <svg class="bt-bolt"><use href="#i-bolt"/></svg></span>
      <p class="v"><span id="battPct">–</span><small>%</small></p>
    </div>
    <p class="bt-m"><span><b id="battV">–</b><small>V</small></span>
      <span id="battAw"><b id="battA">–</b><small>A</small></span>
      <span id="battWw"><b id="battW">–</b><small>W</small></span></p>
  </div>

  <div class="ctl">
    <div class="ctl-row">
      <span class="pill online" id="connPill"><svg class="ico" id="connIco"><use href="#i-signal"/></svg>
        <span id="conn">Connecting</span></span>
      <button class="phn none" id="phn" data-snd="open" type="button" title="No phone connected" aria-
label="Mobile app connections">
        <svg class="ico"><use href="#i-phoneoff"/></svg><b id="phnN"></b>
        <i id="phnC"><svg><use href="#i-cloudidle"/></svg></i></button>
    </div>
    <div class="ctl-row">
      <div class="tsw" id="theme" role="group" aria-label="Appearance">
        <button type="button" class="t-sun" data-t="light" aria-pressed="true" aria-label="Light mode"
title="Light mode"><svg viewBox="0 0 24 24" fill="none" stroke="currentColor" stroke-width="2.2"
             stroke-linecap="round" aria-hidden="true"><circle cx="12" cy="12" r="4.3"/><g
class="rays"><path d="M12 1.6v2.6M12 19.8v2.6M1.6 12h2.6M19.8 12h2.6M4.6 4.6l1.8 1.8M17.6 17.6l1.8 1.8M19.4
4.6l-1.8 1.8M6.4 17.6l-1.8 1.8"/></g></svg></button>
        <button type="button" class="t-moon" data-t="dark" aria-pressed="false" aria-label="Dark mode"
title="Dark mode"><svg viewBox="0 0 24 24" fill="none" stroke="currentColor" stroke-width="2.2"
             stroke-linecap="round" stroke-linejoin="round" aria-hidden="true"><path class="mn" d="M20.5
14.6A8.5 8.5 0 1 1 9.4 3.5a6.6 6.6 0 0 0 11.1 11.1z"/><path class="star" d="M18.2 2.4v3.6M16.4
4.2h3.6"/></svg></button>
      </div>
      <a class="btn sm" id="wifiBtn" href="/wifi" hidden title="Wi-Fi setup" aria-label="Wi-Fi setup">
        <svg class="ico" viewBox="0 0 24 24" fill="none" stroke="currentColor" stroke-width="2.2"
             stroke-linecap="round" stroke-linejoin="round"><path d="M2.5 9a14 14 0 0 1 19 0M5.8 12.6a9 9 0
0 1 12.4 0M9 16.2a4.4 4.4 0 0 1 6 0"/><circle cx="12" cy="19.4" r=".9" fill="currentColor"/></svg></a>
      <button class="btn sm" id="miniBtn" data-snd="minimize" type="button" title="Minimize" aria-
label="Minimize dashboard">
        <svg class="ico"><use href="#i-mini"/></svg></button>
    </div>
    <div class="clk" id="clk" title="Philippine time"><svg class="ico"><use href="#i-clock"/></svg><span
id="clkTxt"></span></div>
  </div>
</header>

<nav class="tabs" role="tablist">
  <button class="tab" id="tabMonitor" role="tab" aria-selected="true" aria-controls="monitor"
type="button">
    <svg class="ico"><use href="#i-eye"/></svg>Monitor</button>
  <button class="tab" id="tabHistory" role="tab" aria-selected="false" aria-controls="history"
type="button">
    <svg class="ico"><use href="#i-clock"/></svg>History <span class="count" id="logCount"></span></button>
```

```
  <button class="tab" id="tabSettings" role="tab" aria-selected="false" aria-controls="settings" type="button">
    <svg class="ico"><use href="#i-gear"/></svg>Settings</button>
</nav>

<main>
  <section class="page on" id="monitor" role="tabpanel" aria-labelledby="tabMonitor">
    <div class="card card-feed monitor" id="tv">
      <div class="mon-top">
        <span class="led" id="led"></span>
        <span class="engr">CAM 01 · LIVE</span>
        <span class="engr fpsb" id="fps">– FPS</span>
        <span class="engr hint" id="roihelp"><svg class="ico"><use href="#i-eyeoff"/></svg>Grey boxes are outside the monitored area and not counted</span>
        <button class="hw teal" id="capture" type="button">
          <svg class="ico a-shutter"><use href="#i-shutter"/></svg>Capture</button>
        <button class="hw sq rfb" id="rfBtn" type="button"
                title="Tap: reconnect camera · Hold 5 s: restart Garbage-Guard"
                aria-label="Reconnect camera. Hold for 5 seconds to restart Garbage-Guard">
          <svg class="ico" viewBox="0 0 24 24" fill="none" stroke="currentColor" stroke-width="2.2"
               stroke-linecap="round" stroke-linejoin="round" aria-hidden="true">
            <g class="arr"><path d="M19.4 8.6A8 8 0 0 0 5 7.4"/><path d="M5 3.6v3.8h3.8"/>
              <path d="M4.6 15.4A8 8 0 0 0 19 16.6"/><path d="M19 20.4v-3.8h-3.8"/></g>
            <circle class="core" cx="12" cy="12" r="2.6"/></svg>
          <svg class="trace" viewBox="0 0 46 44" preserveAspectRatio="none" aria-hidden="true">
            <rect x="1.5" y="1.5" width="43" height="41" rx="13" pathLength="100"/></svg>
        </button>
        <button class="hw sq fsbtn" id="fsOpen" data-snd="open" type="button" aria-label="Enter fullscreen"
                title="Fullscreen"><svg class="ico" viewBox="0 0 24 24" fill="none" stroke="currentColor" stroke-width="2.2" stroke-linecap="round" stroke-linejoin="round" aria-hidden="true"><path class="c tl" d="M9.5 3.5H3.5v6"/><path class="c tr" d="M14.5 3.5h6v6"/><path class="c br" d="M20.5 14.5v6h-6"/><path class="c bl" d="M3.5 14.5v6h6"/></svg></button>
      </div>
      <div class="screen" id="screen">
        <div class="zoomer" id="feedZoom">
          <img id="feed" alt="Live camera view with detections">
          <svg id="overlay" viewBox="0 0 1000 1000" preserveAspectRatio="none"></svg>
        </div>
        <div class="scan"></div><div class="glare"></div>
        <div class="flag" id="flag"><svg class="ico"><use href="#i-bell"/></svg>Accumulation alert</div>
        <div class="off" id="offline"><svg class="ico"><use href="#i-nolink"/></svg>No camera signal</div>
      </div>
      <div class="mon-bot mute" id="muteBar">
        <span class="lcd"><svg class="ico a-ring"><use href="#i-bell"/></svg>
          <span class="mute-txt" id="muteTxt">No alert</span>
          <i class="prog"><i></i></i></span>
        <button class="sw" id="autoBtn" type="button" role="switch" aria-checked="false"
                title="Mute every new alert automatically"><i></i><span>Auto-mute</span></button>
        <label class="mute-pick" for="muteFor"><span>Mute for</span>
          <select id="muteFor">
            <option value="300">5 minutes</option>
            <option value="900" selected>15 minutes</option>
            <option value="1800">30 minutes</option>
            <option value="3600">1 hour</option>
            <option value="0">Until I unmute</option>
          </select></label>
        <button class="hw" id="muteBtn" type="button">
          <svg class="ico a-shake"><use href="#i-belloff"/></svg>Mute</button>
        <button class="hw teal" id="unmuteBtn" type="button" hidden>
          <svg class="ico a-pop"><use href="#i-bellon"/></svg>Unmute</button>
      </div>
    </div>

    <div class="side">
      <section class="card card-set">
        <div class="hd"><svg class="ico"><use href="#i-gear"/></svg><h2>Detection settings</h2></div>
        <div class="field">
          <label for="conf"><svg class="ico"><use href="#i-eye"/></svg>Detection confidence</label>
          <div class="well stp">
            <button class="step" type="button" data-for="conf" data-d="-5" aria-label="Lower confidence">–</button>
            <input id="conf" type="number" min="5" max="95" step="5" inputmode="numeric">
            <span class="u">%</span>
            <button class="step" type="button" data-for="conf" data-d="5" aria-label="Raise confidence">+</button>
          </div>
          <p class="hint"><svg class="ico"><use href="#i-ok"/></svg>40% is the tested default.</p>
        </div>
        <div class="field">
          <label for="thresh"><svg class="ico"><use href="#i-bell"/></svg>Accumulation limit</label>
          <div class="well stp">
```

```
            <button class="step" type="button" data-for="thresh" data-d="-1" aria-label="Lower limit">−</button>
            <input id="thresh" type="number" min="1" max="200" step="1" inputmode="numeric">
            <span class="u">items</span>
            <button class="step" type="button" data-for="thresh" data-d="1" aria-label="Raise limit">+</button>
          </div>
          <p class="hint"><svg class="ico"><use href="#i-warn"/></svg>
            Alert fires here, resets below <b id="rearm">−</b>.</p>
        </div>
        <div class="pair">
          <button class="btn ink" id="save" data-snd="confirm" type="button"><svg class="ico a-pop"><use href="#i-save"/></svg>Save</button>
          <button class="btn" id="test" type="button"><svg class="ico a-ring"><use href="#i-bell"/></svg>Test alert</button>
        </div>
      </section>

      <section class="card card-area">
        <div class="hd"><svg class="ico"><use href="#i-poly"/></svg><h2>Monitored area</h2></div>
        <div class="pair" style="margin-bottom:5px">
          <button class="btn teal" id="new" data-snd="open" type="button"><svg class="ico a-tilt"><use href="#i-pen"/></svg>Draw</button>
          <button class="btn" id="edit" data-snd="open" type="button"><svg class="ico a-tilt"><use href="#i-edit"/></svg>Edit</button>
          <button class="btn" id="clear" data-snd="danger" type="button"><svg class="ico a-shake"><use href="#i-eraser"/></svg>Clear</button>
          <button class="btn ink" id="apply" data-snd="confirm" type="button"><svg class="ico a-pop"><use href="#i-check"/></svg>Apply</button>
        </div>
        <button class="btn" id="undo" data-snd="point_undo" type="button" style="width:100%;display:none">
          <svg class="ico a-left"><use href="#i-undo"/></svg>Undo last point</button>
        <p class="hint"><svg class="ico"><use href="#i-poly"/></svg>
          Tap the video to outline the water, 3 points or more. Anything outside is ignored.</p>
      </section>

    </div>
  </section>

  <section class="page" id="history" role="tabpanel" aria-labelledby="tabHistory">
    <div class="card card-log">
      <div class="hd"><svg class="ico"><use href="#i-clock"/></svg><h2>History</h2>
        <span class="cl-lb" title="The camera picture alone, with no boxes, for labelling">Clean copies</span>
        <div class="fbar quick" id="clMode" role="group" aria-label="Save clean copies">
          <button type="button" data-cl="off" aria-pressed="false" title="Do not save clean copies">Off</button>
          <button type="button" data-cl="manual" aria-pressed="false" title="Only pictures taken with Capture">Manual</button>
          <button type="button" data-cl="all" aria-pressed="false" title="Captures, alerts and tests">All</button>
        </div>
        <span class="cl-use" id="clUse"></span>
        <button class="btn sm" id="refreshLogs" type="button">
          <svg class="ico a-spin"><use href="#i-refresh"/></svg>Refresh</button>
      </div>
      <div class="tools">
        <div class="fbar" id="fbar" role="group" aria-label="Filter by kind of event">
          <button type="button" data-f="all" aria-pressed="true" title="All events"><svg class="ico"><use href="#i-layers"/></svg>All</button>
          <button type="button" data-f="alerts" aria-pressed="false" title="Limit reached"><svg class="ico"><use href="#i-bell"/></svg>Alerts</button>
          <button type="button" data-f="captures" aria-pressed="false" title="Manual captures"><svg class="ico"><use href="#i-shutter"/></svg>Captures</button>
          <button type="button" data-f="tests" aria-pressed="false" title="Test alerts"><svg class="ico"><use href="#i-wrench"/></svg>Tests</button>
          <button type="button" data-f="mutes" aria-pressed="false" title="Mutes and unmutes"><svg class="ico"><use href="#i-eyeoff"/></svg>Mutes</button>
          <button type="button" data-f="power" aria-pressed="false" title="Shutdowns"><svg class="ico"><use href="#i-power"/></svg>Power</button>
        </div>
        <span class="sp"></span>
        <button class="btn sm" id="markAll" type="button">
          <svg class="ico a-pop"><use href="#i-check"/></svg>Mark read</button>
        <button class="btn sm danger" id="delShown" type="button">
          <svg class="ico a-tilt"><use href="#i-trash"/></svg>Delete</button>
      </div>
      <div class="tools dates">
        <span class="dt"><label for="dFrom">From</label><input id="dFrom" type="date"></span>
        <span class="dt"><label for="dTo">To</label><input id="dTo" type="date"></span>
        <div class="fbar quick" id="quick" role="group" aria-label="Quick date range">
```

```
          <button type="button" data-q="today">Today</button>
          <button type="button" data-q="7">7 days</button>
          <button type="button" data-q="30">30 days</button>
          <button type="button" data-q="any" aria-pressed="true">Any</button>
        </div>
        <span class="sp"></span>
        <span class="scope" id="scopeLine"></span>
      </div>
      <div class="tablewrap">
        <div class="lt" role="table" aria-label="Event history">
          <div class="lh" role="row">
            <span role="columnheader" class="c-no" title="Record number, the newest is the highest">#</span>
            <span role="columnheader" class="c-rd" title="Unread / read"><svg class="ico"><use href="#i-mail"/></svg></span>
            <span role="columnheader"><svg class="ico"><use href="#i-cal"/></svg>Time</span>
            <span role="columnheader"><svg class="ico"><use href="#i-tag"/></svg>Event</span>
            <span role="columnheader" class="c-n"><svg class="ico"><use href="#i-layers"/></svg>Items</span>
            <span role="columnheader"><svg class="ico"><use href="#i-image"/></svg>Snapshot</span>
            <span role="columnheader" class="c-act"><svg class="ico"><use href="#i-act"/></svg></span>
          </div>
          <div id="logs" role="rowgroup"></div>
          <div id="logMore" hidden>Scroll for older records</div>
        </div>
        <div class="empty" id="noLogs"><svg class="ico"><use href="#i-clock"/></svg>
          <span id="noLogsText">No events yet. Alerts, captures and tests appear here.</span></div>
      </div>
      <div class="pager">
        <span class="where" id="where"></span>
        <span class="sp"></span>
        <span class="hint" style="margin:0"><svg class="ico"><use href="#i-eye"/></svg>
          Tap a picture to open the snapshot.</span>
      </div>
    </div>
  </section>
  <section class="page" id="settings" role="tabpanel" aria-labelledby="tabSettings">
    <div class="setwrap">
    <div class="setgrid">
      <section class="card card-pow c-scr" id="scrCard">
        <div class="hd"><svg class="ico"><use href="#i-sunmoon"/></svg><h2>Screen saver</h2></div>
        <div class="seg" id="scrMode" role="group" aria-label="Screen saver mode">
          <button type="button" data-mode="off" aria-pressed="false">Off</button>
          <button type="button" data-mode="dim" aria-pressed="false">Dim</button>
          <button type="button" data-mode="never" aria-pressed="false">Never</button>
        </div>
        <div class="pfield"><label for="scrMin"><svg class="ico"><use href="#i-clock"/></svg>Turn off after</label>
          <div class="well stp">
            <button class="step" type="button" data-for="scrMin" data-d="-1" aria-label="Less time">−</button>
            <input id="scrMin" type="number" min="1" max="60" step="1" inputmode="numeric"><span class="u">min</span>
            <button class="step" type="button" data-for="scrMin" data-d="1" aria-label="More time">+</button>
          </div></div>
        <div class="pfield"><label for="scrBat"><svg class="ico"><use href="#i-batt"/></svg>On battery</label>
          <div class="well stp">
            <button class="step" type="button" data-for="scrBat" data-d="-30" aria-label="Less time on battery">−</button>
            <input id="scrBat" type="number" min="30" max="3600" step="30" inputmode="numeric"><span class="u">sec</span>
            <button class="step" type="button" data-for="scrBat" data-d="30" aria-label="More time on battery">+</button>
          </div></div>
        <div class="pfield" id="scrDimRow"><label for="scrDim"><svg class="ico"><use href="#i-sunmoon"/></svg>Dim level</label>
          <div class="well stp">
            <button class="step" type="button" data-for="scrDim" data-d="-5" aria-label="Darker">−</button>
            <input id="scrDim" type="number" min="5" max="50" step="5" inputmode="numeric"><span class="u">%</span>
            <button class="step" type="button" data-for="scrDim" data-d="5" aria-label="Brighter">+</button>
          </div></div>
        <div class="prow"><label><svg class="ico"><use href="#i-bell"/></svg>Wake on alert</label>
          <button class="sw lt" id="scrWake" type="button" role="switch" aria-checked="true"><i></i></button></div>
        <button class="btn sm wide" id="scrSleep" type="button"><svg class="ico"><use href="#i-sunmoon"/></svg>Sleep now</button>
        <p class="hint"><svg class="ico"><use href="#i-ok"/></svg>Tap to wake. The first tap only
```

```
    wakes.</p>
1781        <p class="hint bad" id="scrNote" hidden><svg class="ico"><use href="#i-
    warn"/></svg><span></span></p>
1782      </section>
1783      <div class="setcol">
1784      <section class="card card-pow c-pow" id="powCard">
1785        <div class="hd"><svg class="ico"><use href="#i-power"/></svg><h2>Power</h2>
1786          <span class="chip" id="powChip" hidden><svg class="ico"><use href="#i-
    batt"/></svg><span></span></span></div>
1787        <div class="prow"><label><svg class="ico"><use href="#i-batt"/></svg>Auto shutdown</label>
1788          <button class="sw lt" id="shutSw" type="button" role="switch" aria-
    checked="true"><i></i></button></div>
1789        <div class="pfield"><label for="shutPct"><svg class="ico"><use href="#i-gauge"/></svg>Shut down
    at</label>
1790          <div class="well stp">
1791            <button class="step" type="button" data-for="shutPct" data-d="-5" aria-label="Lower">−</button>
1792            <input id="shutPct" type="number" min="10" max="50" step="5" inputmode="numeric"><span
    class="u">%</span>
1793            <button class="step" type="button" data-for="shutPct" data-d="5" aria-label="Higher">+</button>
1794          </div></div>
1795        <p class="hint"><svg class="ico"><use href="#i-ok"/></svg>Shuts down cleanly when the battery drops
    this low.</p>
1796        <div class="pfield" id="cellBox" hidden><label><svg class="ico"><use href="#i-batt"/></svg>Cells (4
    × 21700)</label>
1797          <div class="cells" id="cells"></div></div>
1798        <div class="prow" id="packRow" hidden><label><svg class="ico"><use href="#i-clock"/></svg><span
    id="packLbl">Time left</span></label>
1799          <b class="pv" id="packVal">–</b></div>
1800        <span class="grow"></span>
1801        <button class="btn danger wide" id="pwrOff" type="button"><svg class="ico"><use href="#i-
    power"/></svg>Shut down now</button>
1802        <p class="hint"><svg class="ico"><use href="#i-warn"/></svg>Start the Pi again with the UPS HAT
    switch.</p>
1803      </section>
1804      <section class="card card-pow c-qt wait" id="quietCard">
1805        <div class="hd"><svg class="ico"><use href="#i-clock"/></svg><h2>Quiet hours</h2></div>
1806        <p class="hint waitnote"><svg class="ico"><use href="#i-nolink"/></svg><span><span
    class="long">Waiting for the Pi to send its settings.</span><span class="short">Waiting for the
    Pi.</span></span></p>
1807        <div class="prow"><label><svg class="ico"><use href="#i-belloff"/></svg>Quiet hours</label>
1808          <button class="sw lt" id="bzQuiet" type="button" role="switch" aria-
    checked="false"><i></i></button></div>
1809        <div class="pair2" id="bzQuietRows">
1810        <div class="pfield" id="bzFromRow"><label for="bzFrom"><svg class="ico"><use href="#i-
    sunmoon"/></svg>From</label>
1811          <div class="well stp">
1812            <button class="step" type="button" data-for="bzFrom" data-d="-30" aria-
    label="Earlier">−</button>
1813            <input id="bzFrom" type="text" data-time="1" readonly><span class="u"></span>
1814            <button class="step" type="button" data-for="bzFrom" data-d="30" aria-label="Later">+</button>
1815          </div></div>
1816        <div class="pfield" id="bzToRow"><label for="bzTo"><svg class="ico"><use href="#i-
    sunmoon"/></svg>Until</label>
1817          <div class="well stp">
1818            <button class="step" type="button" data-for="bzTo" data-d="-30" aria-label="Earlier">−</button>
1819            <input id="bzTo" type="text" data-time="1" readonly><span class="u"></span>
1820            <button class="step" type="button" data-for="bzTo" data-d="30" aria-label="Later">+</button>
1821          </div></div>
1822        </div>
1823        <p class="hint" id="bzQuietNote" hidden><svg class="ico"><use href="#i-
    clock"/></svg><span></span></p>
1824        <span class="grow"></span>
1825        <p class="hint gen"><svg class="ico"><use href="#i-ok"/></svg>Quiet hours silence the buzzer. Tests
    use the saved settings.</p>
1826      </section>
1827      </div>
1828      <section class="card card-pow c-snd wait" id="sndCard">
1829        <div class="hd"><svg class="ico"><use href="#i-bellon"/></svg><h2>Buzzer</h2>
1830          <span class="chip off" id="bzChip"><span>OFFLINE</span></span></div>
1831        <p class="hint waitnote"><svg class="ico"><use href="#i-nolink"/></svg><span><span
    class="long">Waiting for the Pi to send its settings.</span><span class="short">Waiting for the
    Pi.</span></span></p>
1832        <div class="prow"><label><svg class="ico"><use href="#i-bellon"/></svg>Buzzer</label>
1833          <button class="sw lt" id="bzOn" type="button" role="switch" aria-
    checked="true"><i></i></button></div>
1834        <div class="seg" id="bzVol" role="group" aria-label="Volume">
1835          <button type="button" data-vol="low" aria-pressed="false">Low</button>
1836          <button type="button" data-vol="medium" aria-pressed="false">Medium</button>
1837          <button type="button" data-vol="high" aria-pressed="false">High</button>
1838        </div>
1839        <div class="prow"><label><svg class="ico"><use href="#i-bell"/></svg>Alerts</label>
```

```
          <button class="sw lt" id="bzAlerts" type="button" role="switch" aria-checked="true"><i></i></button></div>
        <div class="prow"><label><svg class="ico"><use href="#i-batt"/></svg><span class="long">Low-battery beeps</span><span class="short">Battery beeps</span></label>
          <button class="sw lt" id="bzCount" type="button" role="switch" aria-checked="true"><i></i></button></div>
        <div class="prow"><label><svg class="ico"><use href="#i-act"/></svg>Button sounds</label>
          <button class="sw lt" id="bzUi" type="button" role="switch" aria-checked="false"><i></i></button></div>
        <div class="prow"><label><svg class="ico"><use href="#i-refresh"/></svg>Repeat alarm</label>
          <button class="sw lt" id="bzRep" type="button" role="switch" aria-checked="true"><i></i></button></div>
        <div class="pfield" id="bzRepRow"><label for="bzRepS"><svg class="ico"><use href="#i-clock"/></svg>Repeat every</label>
          <div class="well stp">
            <button class="step" type="button" data-for="bzRepS" data-d="-10" aria-label="Shorter">−</button>
            <input id="bzRepS" type="number" min="10" max="300" step="10" inputmode="numeric"><span class="u">sec</span>
            <button class="step" type="button" data-for="bzRepS" data-d="10" aria-label="Longer">+</button>
          </div></div>
        <span class="grow"></span>
        <div class="tests">
          <button class="btn sm" id="bzTestAlarm" type="button"><svg class="ico"><use href="#i-bell"/></svg>Alarm</button>
          <button class="btn sm" id="bzTestTune" type="button"><svg class="ico"><use href="#i-bellon"/></svg>Tune</button>
        </div>
        <p class="hint bad" id="bzNote" hidden><svg class="ico"><use href="#i-warn"/></svg><span></span></p>
      </section>
      <div class="setcol splitwide">
      <section class="card card-pow c-cam wait" id="camCard">
        <div class="hd"><svg class="ico"><use href="#i-cam"/></svg><h2><span class="long">Camera stream</span><span class="short">Camera</span></h2>
          <span class="chip" id="camChip"><span>–</span></span></div>
        <p class="hint waitnote"><svg class="ico"><use href="#i-nolink"/></svg><span><span class="long">Waiting for the Pi to send its settings.</span><span class="short">Waiting for the Pi.</span></span></p>
        <div class="seg" id="camStream" role="group" aria-label="Camera stream">
          <button type="button" data-stream="main" aria-pressed="false" title="Sharp picture, finds smaller items">Main</button>
          <button type="button" data-stream="sub" aria-pressed="false" title="Light 640×360 picture, the old setting">Sub</button>
        </div>
        <div class="pfield"><label><svg class="ico"><use href="#i-target"/></svg>Detection size</label>
          <div class="seg" id="camSize" role="group" aria-label="Detection size">
            <button type="button" data-size="640" aria-pressed="false" title="Fastest">640</button>
            <button type="button" data-size="960" aria-pressed="false" title="Balanced, the default">960</button>
            <button type="button" data-size="1280" aria-pressed="false" title="Smallest items, slowest">1280</button>
          </div></div>
        <div class="pfield"><label><svg class="ico"><use href="#i-tag"/></svg>Box labels</label>
          <div class="seg" id="lblPick" role="group" aria-label="Box labels, pick any">
            <button type="button" data-lbl="id" aria-pressed="false" title="Tracking number, e.g. #53">ID</button>
            <button type="button" data-lbl="class" aria-pressed="false" title="bottle, bag or food_container">Class</button>
            <button type="button" data-lbl="conf" aria-pressed="false" title="How sure the model is, e.g. 50%">Conf.</button>
          </div></div>
        <p class="hint" id="lblNow"><svg class="ico"><use href="#i-tag"/></svg><span>–</span></p>
        <p class="hint" id="camNow"><svg class="ico"><use href="#i-signal"/></svg><span>–</span></p>
        <p class="hint bad" id="camNote" hidden><svg class="ico"><use href="#i-warn"/></svg><span></span></p>
      </section>
      <section class="card card-pow c-mdl wait" id="mdlCard">
        <div class="hd"><svg class="ico"><use href="#i-target"/></svg><h2>Model</h2>
          <span class="chip" id="mdlChip"><span>–</span></span></div>
        <p class="hint waitnote"><svg class="ico"><use href="#i-nolink"/></svg><span><span class="long">Waiting for the Pi to send its settings.</span><span class="short">Waiting for the Pi.</span></span></p>
        <div class="mdlrun"><b id="mdlBig">–</b><span id="mdlNow">Now running</span></div>
        <p class="hint bad" id="mdlNote" hidden><svg class="ico"><use href="#i-warn"/></svg><span></span></p>
        <button class="btn sm" id="mdlBack" type="button" hidden><svg class="ico a-left"><use href="#i-undo"/></svg><span>Go back</span></button>
        <input id="mdlZip" type="file" accept=".zip,application/zip,application/x-zip-compressed,application/octet-stream" hidden>
        <input id="mdlDir" type="file" webkitdirectory multiple hidden>
```

```
        <div class="mdlbtns">
          <button class="btn sm" id="mdlZipBtn" type="button"><svg class="ico a-pop"><use href="#i-box"/></svg><span class="long">Choose .zip</span><span class="short">Zip file</span></button>
          <button class="btn sm" id="mdlDirBtn" type="button"><svg class="ico a-pop"><use href="#i-layers"/></svg><span class="long">Choose folder</span><span class="short">Folder</span></button>
        </div>
        <p class="hint" id="mdlFile"><svg class="ico"><use href="#i-box"/></svg><span>No model chosen</span></p>
        <label class="mdllbl" for="mdlVer"><svg class="ico"><use href="#i-tag"/></svg><span class="long">New version name</span><span class="short">Version name</span></label>
        <div class="mdlrow">
          <div class="well"><input id="mdlVer" type="text" maxlength="24" placeholder="v10"
            autocomplete="off" autocapitalize="off" spellcheck="false"></div>
          <button class="btn sm teal" id="mdlUp" type="button" disabled><svg class="ico a-pop"><use href="#i-up"/></svg>Upload</button>
        </div>
        <div class="mdlbar" id="mdlBar" hidden><i></i></div>
        <p class="hint" id="mdlState" hidden><svg class="ico"><use href="#i-up"/></svg><span></span></p>
        <p class="hint gen"><svg class="ico"><use href="#i-target"/></svg><span><span class="long">Export with yolo export model=best.pt format=ncnn imgsz=960. v8 and v9 were trained at 960 px.</span><span class="short">Export: yolo export model=best.pt format=ncnn imgsz=960</span></span></p>
      </section>
      </div>
    </div>
      <div class="setfoot">
        <span class="hint"><svg class="ico"><use href="#i-ok"/></svg>Changes apply when you press Save.</span>
        <button class="btn ink" id="pwrSave" data-snd="confirm" type="button"><svg class="ico a-pop"><use href="#i-save"/></svg>Save</button>
      </div>
    </div>
  </section>
</main>
</div>

<button class="bub" id="bub" data-snd="restore" type="button" aria-label="Open the dashboard" title="Open the dashboard">
  <span class="ring" id="bubRing"></span>
  <span class="logo" id="bubLogo"></span>
  <span class="dot2"></span>
  <span class="chg"><svg class="ico"><use href="#i-bolt"/></svg></span>
</button>

<section class="fs" id="fsRoot" hidden aria-label="Fullscreen live feed">
  <div class="fs-top">
    <span class="fs-brand"><span class="logo">
      <img class="lg-light" src="_PNG_BASE64_PLACEHOLDER" alt="Garbage-Guard">
      <img class="lg-dark" src="_PNG_BASE64_PLACEHOLDER" alt="">
    </span></span>
    <span class="pill online" id="fsConnPill">
      <svg class="ico"><use href="#i-signal"/></svg><span id="fsConn">Camera online</span></span>
    <span class="fs-stat" id="fsPhn"><svg class="ico"><use href="#i-phoneoff"/></svg><span class="fs-sub" id="fsPhnT">No app</span></span>
    <span class="fs-stat"><svg class="ico"><use href="#i-gauge"/></svg>
      <span class="fs-num" id="fsLat">–</span><span>ms</span>
      <span class="fs-sub">avg <span id="fsLatAvg">–</span> ms</span></span>
    <span class="fs-stat fs-clock"><svg class="ico"><use href="#i-clock"/></svg><span class="fs-sub" id="fsTime"></span></span>
    <span class="sp"></span>
    <span class="fs-state" id="fsState">
      <svg class="ico"><use href="#i-ok"/></svg><span id="fsStateTxt">Normal</span></span>
    <div class="tsw" id="fsTheme" role="group" aria-label="Appearance">
      <button type="button" class="t-sun" data-t="light" aria-pressed="true" aria-label="Light mode" title="Light mode"><svg viewBox="0 0 24 24" fill="none" stroke="currentColor" stroke-width="2.2"
          stroke-linecap="round" aria-hidden="true"><circle cx="12" cy="12" r="4.3"/><g class="rays"><path d="M12 1.6v2.6M12 19.8v2.6M1.6 12h2.6M19.8 12h2.6M4.6 4.6l1.8 1.8M17.6 17.6l1.8 1.8M19.4 4.6l-1.8 1.8M6.4 17.6l-1.8 1.8"/></g></svg></button>
      <button type="button" class="t-moon" data-t="dark" aria-pressed="false" aria-label="Dark mode" title="Dark mode"><svg viewBox="0 0 24 24" fill="none" stroke="currentColor" stroke-width="2.2"
          stroke-linecap="round" stroke-linejoin="round" aria-hidden="true"><path class="mn" d="M20.5 14.6A8.5 8.5 0 1 1 9.4 3.5a6.6 6.6 0 0 0 11.1 11.1z"/><path class="star" d="M18.2 2.4v3.6M16.4 4.2h3.6"/></svg></button>
    </div>
    <button class="fsbtn out fs-exit" id="fsClose" data-snd="back" type="button"
        aria-label="Exit fullscreen" title="Exit fullscreen"><svg class="ico" viewBox="0 0 24 24" fill="none" stroke="currentColor" stroke-width="2.2" stroke-linecap="round" stroke-linejoin="round" aria-hidden="true"><path class="c tl" d="M3.5 9.5h6v-6"/><path class="c tr" d="M20.5 9.5h-6v-6"/><path class="c br" d="M14.5 20.5v-6h6"/><path class="c bl" d="M9.5 20.5v-6h-6"/></svg></button>
  </div>

  <div class="fs-mon monitor">
```

```
    <div class="fs-row" id="fsRow">
      <div class="fs-keys fs-l">
        <div class="fk-cam"><span class="led" id="fsLed"></span><span class="engr">CAM 01</span></div>
        <span class="engr fk-live">LIVE</span>
        <div class="fk-read"><b id="fsFps">–</b><span class="engr">FPS</span></div>
        <div class="fk-meter lv-ok" id="fsMeter" title="Items in the area against the limit">
          <span class="engr">ITEMS</span>
          <i class="fk-well"><i id="fsMeterFill"></i></i>
          <b id="fsItems">0</b><span class="engr" id="fsLimit">OF 20</span>
        </div>
        <div class="fk-cls">
          <span title="Bottle"><svg class="ico c-bottle"><use href="#i-bottle"/></svg><b
id="fsBottle">0</b></span>
          <span title="Bag"><svg class="ico c-bag"><use href="#i-bag"/></svg><b id="fsBag">0</b></span>
          <span title="Container"><svg class="ico c-cont"><use href="#i-cont"/></svg><b
id="fsCont">0</b></span>
        </div>
      </div>
      <div class="fs-stage" id="fsStage">
        <div class="fs-tip" id="fsTip"><svg class="ico"><use href="#i-pen"/></svg><span
id="fsTipTxt"></span></div>
        <button class="zreset" id="fsZoomReset" type="button" hidden title="Back to the whole picture"><svg
class="ico"><use href="#i-refresh"/></svg><span>1×</span></button>
      </div>
      <div class="fs-keys fs-r">
        <button class="hw teal fk" id="fsCapture" type="button">
          <svg class="ico a-shutter"><use href="#i-shutter"/></svg><span>Capture</span></button>
        <button class="hw fk" id="fsMuteBtn" type="button">
          <svg class="ico a-shake"><use href="#i-belloff"/></svg><span>Mute</span></button>
        <button class="hw teal fk" id="fsUnmuteBtn" type="button" hidden>
          <svg class="ico a-pop"><use href="#i-bellon"/></svg><span>Unmute</span></button>
        <button class="sw fk-sw" id="fsAutoBtn" type="button" role="switch" aria-checked="false"
                title="Mute every new alert automatically"><i></i><span>Auto-mute</span></button>
        <button class="hw fk fk-area" id="fsDraw" data-snd="open" type="button" title="Draw a new monitored
area">
          <svg class="ico a-tilt"><use href="#i-pen"/></svg><span>Draw</span></button>
        <button class="hw fk fk-area" id="fsEdit" data-snd="open" type="button" title="Move the points of
the saved area">
          <svg class="ico a-tilt"><use href="#i-edit"/></svg><span>Edit</span></button>
        <button class="hw fk fk-pen" id="fsCancel" data-snd="back" type="button" title="Stop drawing, keep
the saved area">
          <svg class="ico"><use href="#i-x"/></svg><span>Cancel</span></button>
        <button class="hw fk fk-pen" id="fsUndo" data-snd="point_undo" type="button" title="Remove the last
point">
          <svg class="ico a-left"><use href="#i-undo"/></svg><span>Undo</span></button>
        <button class="hw fk fk-pen" id="fsWipe" data-snd="danger" type="button" title="Remove every point.
Press again to remove the saved area">
          <svg class="ico a-shake"><use href="#i-eraser"/></svg><span>Clear</span></button>
        <button class="hw teal fk fk-pen" id="fsApply" data-snd="confirm" type="button" title="Save this
outline as the monitored area">
          <svg class="ico a-pop"><use href="#i-check"/></svg><span>Apply</span></button>
      </div>
    </div>
    <div class="mon-bot mute fs-lcdrow" id="fsMuteBar">
      <span class="lcd"><svg class="ico a-ring"><use href="#i-bell"/></svg>
        <span class="mute-txt" id="fsMuteTxt">No alert to mute</span>
        <i class="prog"><i></i></i></span>
      <label class="mute-pick" for="fsMuteFor"><span>Mute for</span>
        <select id="fsMuteFor">
          <option value="300">5 minutes</option>
          <option value="900" selected>15 minutes</option>
          <option value="1800">30 minutes</option>
          <option value="3600">1 hour</option>
          <option value="0">Until I unmute</option>
        </select></label>
    </div>
  </div>
</section>

<div id="saver" data-snd="wake" popover="manual" hidden aria-hidden="true"></div>
<div id="pwrBanner" popover="manual" hidden role="alert">
  <svg class="ico"><use href="#i-warn"/></svg>
  <div class="pb-txt"><b id="pbHead">Shutting down</b><span id="pbSub"></span></div>
  <button class="btn" id="pbCancel" data-snd="back" type="button">Cancel</button>
</div>

<dialog id="viewer">
  <div class="vh">
    <span class="ev" id="vEv"></span>
    <h3 id="vTitle">Snapshot</h3>
    <div class="fbar quick" id="vPic" role="group" aria-label="Picture" hidden>
```

```
      <button type="button" data-pic="ann" aria-pressed="true">Annotated</button>
      <button type="button" data-pic="clean" aria-pressed="false">Clean</button>
    </div>
    <button class="btn sm" id="vOpen" type="button">
      <svg class="ico a-pop"><use href="#i-eye"/></svg>Full size</button>
    <button class="btn sm ink" id="vClose" data-snd="back" type="button">Close</button>
  </div>
  <div class="vb">
    <div class="vshot"><img id="vImg" alt="Saved snapshot"></div>
    <aside class="vinfo" id="vMeta"></aside>
  </div>
</dialog>

<dialog id="zoom" aria-label="Snapshot, full size">
  <div class="zpic"><img id="zImg" alt="Saved snapshot, full size">
    <button class="zreset" id="zZoomReset" type="button" hidden title="Back to the whole picture"><svg
class="ico"><use href="#i-refresh"/></svg><span>1×</span></button></div>
  <aside class="zbar">
    <button class="btn ink" id="zClose" data-snd="back" type="button"><svg class="ico a-left"><use
href="#i-prev"/></svg>Close</button>
    <span class="ev" id="zEv"></span>
    <div class="zinfo" id="zInfo"></div>
    <span class="zhint">Pinch to zoom. Tap to go back.</span>
  </aside>
</dialog>

<dialog id="phnDlg" aria-label="Connected phones">
  <div class="vh">
    <svg class="ico" style="width:18px;height:18px;color:var(--teal)"><use href="#i-phone"/></svg>
    <h3>Connected phones</h3>
    <span class="tagx" id="phnSum">–</span>
    <span class="tagx cl-chip off" id="phnCloud"><svg class="ico"><use href="#i-
cloud"/></svg><span>Firebase off</span></span>
    <button class="btn sm ink" id="phnClose" data-snd="back" type="button">Close</button>
  </div>
  <div class="use" id="phnUse" style="display:none;margin:0 13px 11px">
    <div class="use-top"><svg class="ico"><use href="#i-cloud"/></svg><span>Firebase this month</span><b
id="useN">–</b></div>
    <div class="use-bar"><i id="useBar" style="width:0"></i></div>
    <small id="useNote">Rough estimate counted by the Pi. The exact figure is in the Firebase
console.</small>
  </div>
  <div class="pl" id="phnList"></div>
</dialog>

<dialog id="offDlg" aria-label="Shut down the Pi" style="width:min(420px,92vw)">
  <div class="vh">
    <svg class="ico" style="width:18px;height:18px;color:var(--bad)"><use href="#i-power"/></svg>
    <h3 id="offHead">Shut down the Pi?</h3>
  </div>
  <p id="offText" style="margin:12px 14px;font-size:14px;line-height:1.4">Detection and alerts stop. To
start it again, use the switch on the UPS HAT.</p>
  <div class="pair" style="margin:0 14px 14px">
    <button class="btn" id="offNo" data-snd="back" type="button">Cancel</button>
    <button class="btn bad" id="offYes" data-snd="danger" type="button"><svg class="ico"><use href="#i-
power"/></svg>Shut down</button>
  </div>
</dialog>

<dialog id="battDlg" aria-label="Pi battery details">
  <div class="vh">
    <svg class="ico" id="bdIco" style="width:18px;height:18px"><use href="#i-batt"/></svg>
    <h3>Pi battery</h3>
    <span class="tagx" id="bdTag">–</span>
    <button class="btn sm ink" id="bdClose" data-snd="back" type="button">Close</button>
  </div>
  <div class="bd b-none" id="bdBody">
    <div class="bd-hero">
      <span class="bt-cell" aria-hidden="true"><i class="bt-fill" id="bdFill"></i><i class="seg"></i>
        <svg class="bt-bolt"><use href="#i-bolt"/></svg></span>
      <div><p class="bd-pct"><span id="bdPct">–</span><small>%</small></p>
        <p class="bd-src" id="bdSrc">No UPS found</p></div>
    </div>
    <div class="bd-wells">
      <div class="well"><span class="lb">VOLTAGE</span><b id="bdV">–</b><small>V</small></div>
      <div class="well" id="bdAw"><span class="lb">CURRENT</span><b id="bdA">–</b><small>A</small></div>
      <div class="well" id="bdWw"><span class="lb">POWER</span><b id="bdW">–</b><small>W</small></div>
    </div>
    <p class="bd-lbl">CELLS</p>
    <div class="bd-cells" id="bdCells"></div>
    <p class="bd-note" id="bdInfo" hidden><svg class="ico"><use href="#i-plug"/></svg><span></span></p>
```

```
    <p class="bd-note"><svg class="ico"><use href="#i-ok"/></svg>
      <span>A minus sign means the pack is powering the Pi. A plus sign means it is charging.</span></p>
  </div>
</dialog>

<div id="reboot" role="alertdialog" aria-live="assertive">
  <div class="rb">
    <div class="spin"></div>
    <h2 id="rbTitle">Restarting Garbage-Guard</h2>
    <p id="rbMsg">The camera, detection and dashboard are starting again. This takes about a minute.</p>
    <button class="btn" id="rbReload" type="button" hidden>Reload now</button>
  </div>
</div>

<dialog id="confirm">
  <div class="cfm">
    <div class="row"><svg class="ico"><use href="#i-warn"/></svg>
      <p id="cfmText">Delete?</p></div>
    <div class="acts">
      <button class="btn sm" id="cfmNo" data-snd="back" type="button">Cancel</button>
      <button class="btn sm danger" id="cfmYes" data-snd="danger" type="button">
        <svg class="ico a-tilt"><use href="#i-trash"/></svg>Delete</button>
    </div>
  </div>
</dialog>

<div class="toast" id="toast" role="status"><svg class="ico"><use href="#i-ok"/></svg><span
id="toastMsg"></span></div>

<script>
const $ = id => document.getElementById(id);
const esc = t => t.replace(/[&<>"]/g, c => ({"&":"&amp;","<":"&lt;",">":"&gt;",'"':"&quot;"}[c]));
const EVENTS = {accumulation:["Limit reached","i-bell"], suppressed:["Suppressed","i-eyeoff"],
                test:["Test alert","i-wrench"], manual:["Manual capture","i-shutter"],
                muted:["Alert muted","i-belloff"], auto_muted:["Auto-muted","i-bellauto"], unmuted:["Alert
unmuted","i-bellon"],
                low_battery_shutdown:["Low battery shutdown","i-batt"],
                manual_shutdown:["Manual shutdown","i-power"]};
let BATCH = 30, upTo = BATCH, zoomK = 1, draft=null, editing=false, last=null, rows=[], view=[],
prevCounts={};
let kind = "all";

let deniedAt = 0;
function uiSnd(name){
  try{ if(!KIOSK || !buzzUi) return; }catch(e){ return; }
  if(name === "denied"){
    const now = Date.now();
    if(now - deniedAt < 600) return;
    deniedAt = now;
  }
  fetch("/api/buzzer/ui", {method: "POST", headers: {"Content-Type": "application/json"},
    body: JSON.stringify({sound: name})}).catch(() => {});
}
function toast(m, icon){
  if(icon === "i-warn") uiSnd("denied");
  $("toastMsg").textContent = m;
  $("toast").querySelector("use").setAttribute("href", "#" + (icon || "i-ok"));
  const t = $("toast");
  // A fullscreen element hides everything outside it, so the toast moves in with it.
  const host = $("fsRoot").hidden ? document.body : $("fsRoot");
  if(t.parentNode !== host) host.appendChild(t);
  t.classList.add("show");
  clearTimeout(t._h); t._h = setTimeout(()=>t.classList.remove("show"), 2100);
}

function applyTheme(mode){
  document.documentElement.dataset.theme = mode;
  document.querySelectorAll(".tsw button").forEach(b =>
    b.setAttribute("aria-pressed", String(b.dataset.t === mode)));
  try{ localStorage.setItem("gg-theme", mode); }catch(e){}
}
document.querySelectorAll(".tsw").forEach(sw => sw.addEventListener("click", e => {
  const b = e.target.closest("button");
  if(b) applyTheme(b.dataset.t);
}));
try{ applyTheme(localStorage.getItem("gg-theme")||"light"); }catch(e){ applyTheme("light"); }

const TABS = {monitor:"tabMonitor", history:"tabHistory", settings:"tabSettings"};
let curTab = "monitor";
function showTab(name){
  if(curTab === "settings" && name !== "settings" && pwrDirty){
```

```
    pwrDirty = false; refresh(); pollBattery();
  }
  curTab = name;
  for(const [page, tab] of Object.entries(TABS)){
    $(page).classList.toggle("on", page === name);
    $(tab).setAttribute("aria-selected", page === name);
  }
  if(name === "history") loadLogs();
}
$("tabMonitor").onclick = () => showTab("monitor");
$("tabHistory").onclick = () => showTab("history");
$("tabSettings").onclick = () => showTab("settings");

function drawOverlay(){
  const pts = editing ? draft : [];
  const svg = $("overlay");
  if(!pts || !pts.length){ svg.innerHTML=""; return; }
  const c = "#F0B429";
  const xy = pts.map(p => (p[0]*1000).toFixed(1)+","+(p[1]*1000).toFixed(1)).join(" ");
  const shape = pts.length>=3
    ? `<polygon points="${xy}" fill="${c}" fill-opacity=".2" stroke="${c}" stroke-width="${(3/zoomK).toFixed(2)}" vector-effect="non-scaling-stroke"/>`
    : `<polyline points="${xy}" fill="none" stroke="${c}" stroke-width="${(3/zoomK).toFixed(2)}" vector-effect="non-scaling-stroke"/>`;
  const dots = pts.map(p =>
    `<circle cx="${(p[0]*1000).toFixed(1)}" cy="${(p[1]*1000).toFixed(1)}" r="${(9/zoomK).toFixed(2)}" fill="${c}" stroke="#16130F" stroke-width="${(3/zoomK).toFixed(2)}" vector-effect="non-scaling-stroke"/>`).join("");
  svg.innerHTML = shape + dots;
}

function setEditing(on, seed){
  editing = on; draft = on ? (seed||[]) : null;
  $("tv").classList.toggle("drawing", on);
  $("fsRoot").classList.toggle("drawing", on);
  if(on) $("fsTipTxt").textContent = draft.length < 3
    ? `Tap the picture to outline the water · ${draft.length} of 3 points`
    : `${draft.length} points placed · tap Apply when the shape is closed`;
  $("undo").style.display = on ? "flex" : "none";
  $("roihelp").innerHTML = on
    ? `<svg class="ico"><use href="#i-pen"/></svg>${draft.length} point${draft.length===1?"":"s"} placed, tap Apply when closed`
    : `<svg class="ico"><use href="#i-eyeoff"/></svg>Grey boxes are outside the monitored area and not counted`;
  drawOverlay();
}

/* A point is placed on a tap, not on touch-down, so the first finger of a
   pinch does not drop a stray point. The overlay's box is read after the
   zoom transform, so the point is stored in frame coordinates (0 to 1). */
function placePoint(e){
  const r = $("overlay").getBoundingClientRect();
  draft.push([Math.max(0, Math.min(1, (e.clientX-r.left)/r.width)),
              Math.max(0, Math.min(1, (e.clientY-r.top)/r.height))]);
  if(KIOSK && buzzUi) uiSnd("point");
  setEditing(true, draft);
}

// Every command goes through here. A reply with ok:false plays the 'denied' sound, so a refused
// command is audible at the Pi screen.
async function post(path, body){
  const r = await fetch(path, {method:"POST", headers:{"Content-Type":"application/json"},
                               body: JSON.stringify(body||{})});
  const j = await r.json();
  if(j && j.ok === false) uiSnd("denied");
  return j;
}

$("new").onclick = () => { showTab("monitor"); setEditing(true, []); toast("Tap the video to outline the water","i-pen"); };
$("edit").onclick = () => {
  const cur = last && last.roi ? last.roi.map(p=>[p[0],p[1]]) : [];
  if(!cur.length) return toast("No area saved yet. Use Draw.","i-warn");
  setEditing(true, cur);
};
$("undo").onclick = () => { if(draft && draft.length){ draft.pop(); setEditing(true, draft); } };
$("clear").onclick = async () => {
  await post("/api/roi", {points:[]});
  setEditing(false); toast("Area cleared. Whole frame monitored.","i-eraser"); refresh();
};
$("apply").onclick = async () => {
```

```
  if(!editing) return toast("Use Draw first.","i-warn");
  if(draft.length < 3) return toast("Place at least 3 points.","i-warn");
  await post("/api/roi", {points:draft});
  setEditing(false); toast("Area applied","i-check"); refresh();
};

document.querySelectorAll(".step").forEach(b => b.onclick = () => {
  const i = $(b.dataset.for);
  if(i.dataset.time) return stepTime(i, Number(b.dataset.d));
  i.value = Math.max(Number(i.min), Math.min(Number(i.max),
            (Number(i.value)||0) + Number(b.dataset.d)));
  i.dataset.dirty = "1";
});
["conf","thresh"].forEach(id => $(id).addEventListener("input", () => $(id).dataset.dirty="1"));

$("save").onclick = async () => {
  const j = await post("/api/settings", {conf:Number($("conf").value),
                                         threshold:Number($("thresh").value)});
  if(j.ok){ delete $("conf").dataset.dirty; delete $("thresh").dataset.dirty;
            toast("Settings saved","i-save"); refresh(); }
};
$("test").onclick = async () => { await post("/api/test_alert"); toast("Test alert logged","i-bell");
loadLogs(); };
$("capture").onclick = async () => {
  const j = await post("/api/capture");
  toast(j.ok ? "Snapshot saved" : "No camera frame yet", j.ok ? "i-shutter" : "i-warn");
  loadLogs();
};

const pct = v => v==null ? "–" : Math.round(v*100)+"%";

let pendingDelete = null;
function askDelete(text, body){
  pendingDelete = body;
  $("cfmText").textContent = text;
  $("confirm").showModal();
}
$("cfmNo").onclick = () => { pendingDelete = null; $("confirm").close(); };
$("cfmYes").onclick = async () => {
  if(!pendingDelete) return;
  const j = await post("/api/alerts/delete", pendingDelete);
  pendingDelete = null; $("confirm").close();
  toast(`Deleted ${j.deleted} record${j.deleted===1?"":"s"}, ${j.files_removed}
image${j.files_removed===1?"":"s"}`,"i-trash");
  loadLogs();
};
async function doMute(secs, sel){
  await post("/api/mute", {seconds: secs});
  toast(secs ? `Muted for ${sel.selectedOptions[0].text.toLowerCase()}`
             : "Muted until you unmute", "i-eyeoff");
  refresh(); loadLogs();
}
async function doUnmute(){
  await post("/api/mute", {cancel: true});
  toast("Alert unmuted", "i-bell"); refresh(); loadLogs();
}
$("muteBtn").onclick = () => doMute(Number($("muteFor").value), $("muteFor"));
$("unmuteBtn").onclick = () => doUnmute();

function fmtClock(sec){
  const m = Math.floor(sec/60), ss = sec % 60;
  return `${m}:${String(ss).padStart(2,"0")}`;
}
function durText(sec){
  if(!sec) return "until unmuted";
  return sec >= 3600 ? `${sec/3600} h` : `${sec/60} min`;
}

function paintMuteBar(bar, txt, mbtn, ubtn, sel, sw, s){
  const idle = !s.alert_active && !s.muted;
  bar.hidden = false;
  bar.classList.toggle("is-muted", !!s.muted);
  bar.classList.toggle("is-idle", idle);
  bar.classList.toggle("is-alert", !!s.alert_active && !s.muted);
  mbtn.hidden = !!s.muted;
  ubtn.hidden = !s.muted;
  mbtn.disabled = idle;
  sel.disabled = !!s.muted;
  sw.setAttribute("aria-checked", s.auto_mute ? "true" : "false");
  const who = s.auto_muted ? "Auto-muted" : "Muted";
  if(s.muted){
```

```
    txt.innerHTML = s.mute_left == null
      ? `${who}, until you unmute`
      : `${who}, <span class="left">${fmtClock(s.mute_left)}</span> left`;
  }else if(s.alert_active){
    txt.textContent = "Accumulation alert is active";
  }else{
    txt.textContent = s.auto_mute
      ? `Auto-mute armed, ${durText(s.auto_mute_s)}`
      : "No alert to mute";
  }
  const prog = bar.querySelector(".prog");
  const timed = s.muted && s.mute_left != null && s.mute_total > 0;
  prog.classList.toggle("on", timed);
  if(timed) prog.firstElementChild.style.width =
    Math.max(0, Math.min(100, s.mute_left / s.mute_total * 100)) + "%";
  if(s.auto_mute && !sel.matches(":focus") && !sel.dataset.dirty)
    sel.value = String(s.auto_mute_s);
}

function setMuteBar(s){
  paintMuteBar($("muteBar"), $("muteTxt"), $("muteBtn"),
               $("unmuteBtn"), $("muteFor"), $("autoBtn"), s);
}

async function setAuto(on, sel){
  const secs = Number(sel.value);
  await post("/api/auto_mute", {on, seconds: secs});
  toast(on ? `Auto-mute on: new alerts mute ${durText(secs)}` : "Auto-mute off",
        on ? "i-eyeoff" : "i-bell");
  refresh();
}
function onPick(sel){
  sel.dataset.dirty = "1";
  $("muteFor").value = $("fsMuteFor").value = sel.value;
  if(last && last.auto_mute)
    post("/api/auto_mute", {seconds: Number(sel.value)}).then(() => {
      delete $("muteFor").dataset.dirty; delete $("fsMuteFor").dataset.dirty; refresh();
    });
}
$("autoBtn").onclick = () => setAuto(!(last && last.auto_mute), $("muteFor"));
$("fsAutoBtn").onclick = () => setAuto(!(last && last.auto_mute), $("fsMuteFor"));
$("muteFor").onchange = () => onPick($("muteFor"));
$("fsMuteFor").onchange = () => onPick($("fsMuteFor"));

/* ---------------- pinch zoom ---------------- */
/* Two fingers zoom and pan, one finger pans once zoomed, and a short still
   touch stays a tap. Only the wrapper around the picture moves, so the
   overlay inside it measures its own on-screen box and drawing keeps working
   at any zoom. A mouse wheel zooms too, for a laptop. */
const ZOOM_MAX = 6, TAP_PX = 10, ZTAP_MS = 450, DBL_MS = 320;
function makeZoom(stage, target, opt){
  const z = {s: 1, x: 0, y: 0}, pts = new Map();
  let g = null, a = null, lastTap = 0;
  const box = () => {
    const r = target.getBoundingClientRect();
    return {l: r.left - z.x, t: r.top - z.y, w: r.width / z.s, h: r.height / z.s};
  };
  function set(s, x, y, b){
    z.s = Math.min(ZOOM_MAX, Math.max(1, s));
    if(z.s < 1.03){ z.s = 1; z.x = 0; z.y = 0; }
    else {
      z.x = Math.min(0, Math.max(b.w * (1 - z.s), x));
      z.y = Math.min(0, Math.max(b.h * (1 - z.s), y));
    }
    target.style.transform = z.s > 1 ? `translate(${z.x}px,${z.y}px) scale(${z.s})` : "";
    opt.button.hidden = z.s <= 1;
    opt.button.querySelector("span").textContent = z.s.toFixed(1) + "x";
    if(opt.change) opt.change(z.s);
  }
  function zoomAt(cx, cy, s){
    const b = box(), ns = Math.min(ZOOM_MAX, Math.max(1, s));
    const px = cx - b.l, py = cy - b.t;
    set(ns, px - (px - z.x) * ns / z.s, py - (py - z.y) * ns / z.s, b);
  }
  function anchor(){
    const p = [...pts.values()];
    a = {s: z.s, x: z.x, y: z.y, b: box(), px: p[0].x, py: p[0].y};
    if(p.length > 1){
      a.d = Math.hypot(p[0].x - p[1].x, p[0].y - p[1].y) || 1;
      a.mx = (p[0].x + p[1].x) / 2; a.my = (p[0].y + p[1].y) / 2;
    }
```

```
  }
  stage.addEventListener("pointerdown", e => {
    if(e.button > 0 || e.target.closest("button")) return;
    if(!pts.size) g = {multi: false, moved: false, t0: e.timeStamp, x0: e.clientX, y0: e.clientY, ev: e};
    pts.set(e.pointerId, {x: e.clientX, y: e.clientY});
    if(pts.size > 1) g.multi = true;
    anchor();
  });
  window.addEventListener("pointermove", e => {
    if(!pts.has(e.pointerId)) return;
    pts.set(e.pointerId, {x: e.clientX, y: e.clientY});
    if(Math.hypot(e.clientX - g.x0, e.clientY - g.y0) > TAP_PX) g.moved = true;
    if(!opt.can()) return;
    const p = [...pts.values()];
    if(p.length > 1 && a.d){
      const d = Math.hypot(p[0].x - p[1].x, p[0].y - p[1].y);
      const mx = (p[0].x + p[1].x) / 2, my = (p[0].y + p[1].y) / 2;
      const ns = Math.min(ZOOM_MAX, Math.max(1, a.s * d / a.d));
      // The spot that was under the fingers when they landed stays under them.
      const cx = (a.mx - a.b.l - a.x) / a.s, cy = (a.my - a.b.t - a.y) / a.s;
      set(ns, mx - a.b.l - cx * ns, my - a.b.t - cy * ns, a.b);
    } else if(p.length === 1 && z.s > 1 && g.moved){
      set(z.s, a.x + e.clientX - a.px, a.y + e.clientY - a.py, a.b);
    }
  });
  const up = e => {
    if(!pts.has(e.pointerId)) return;
    pts.delete(e.pointerId);
    if(pts.size) return anchor();
    if(e.type !== "pointerup" || g.multi || g.moved || e.timeStamp - g.t0 > ZTAP_MS) return;
    const dbl = e.timeStamp - lastTap < DBL_MS;
    lastTap = dbl ? 0 : e.timeStamp;
    opt.tap(g.ev, dbl, z.s > 1);
  };
  window.addEventListener("pointerup", up);
  window.addEventListener("pointercancel", up);
  stage.addEventListener("wheel", e => {
    if(!opt.can()) return;
    e.preventDefault();
    zoomAt(e.clientX, e.clientY, z.s * (e.deltaY < 0 ? 1.25 : 0.8));
  }, {passive: false});
  opt.button.addEventListener("click", () => set(1, 0, 0));
  return {reset: () => set(1, 0, 0), zoomAt};
}

/* Live feed: zoom only in fullscreen. Taps still place points while drawing,
   in or out of fullscreen. Outside drawing, a double tap zooms in or back out. */
const feedZoom = makeZoom($("screen"), $("feedZoom"), {
  button: $("fsZoomReset"),
  can: () => fsOn,
  // Points keep their on-screen size at any zoom.
  change(s){ if(s !== zoomK){ zoomK = s; drawOverlay(); } },
  tap(e, dbl, zoomed){
    if(editing){ if(e.target.closest("#overlay")) placePoint(e); return; }
    if(fsOn && dbl) zoomed ? feedZoom.reset() : feedZoom.zoomAt(e.clientX, e.clientY, 2.5);
  }
});
/* Full-size snapshot: a tap goes back as before, unless zoomed in, where a
   double tap returns to the whole picture instead. */
const picZoom = makeZoom(document.querySelector("#zoom .zpic"), $("zImg"), {
  button: $("zZoomReset"),
  can: () => $("zoom").open,
  tap(e, dbl, zoomed){
    if(!zoomed){ if(KIOSK && buzzUi) uiSnd("back"); return $("zoom").close(); }
    if(dbl) picZoom.reset();
  }
});

/* ---------------- fullscreen ---------------- */
let fsOn = false;

let feedAr = 16/9;
function fitFs(){
  if(!fsOn) return;
  const row = $("fsRow"), st = $("fsStage");
  const keys = 2 * 58 + 2 * 7;
  let h = row.clientHeight, w = Math.round(h * feedAr);
  const room = row.clientWidth - keys;
  if(w > room){ w = room; h = Math.round(w / feedAr); }
  st.style.width = w + "px";
  st.style.height = h + "px";
```

```
  feedZoom.reset();
}
window.addEventListener("resize", fitFs);

function fsMoveScreen(toFs){
  const screen = $("screen");
  if(toFs) $("fsStage").appendChild(screen);
  else $("tv").insertBefore(screen, $("muteBar"));
}

async function openFs(){
  if(fsOn) return;
  fsOn = true;
  const root = $("fsRoot");
  root.hidden = false;
  fsMoveScreen(true);
  fitFs();
  requestAnimationFrame(() => { root.classList.add("on"); fitFs(); });
  try{ if(root.requestFullscreen) await root.requestFullscreen(); }catch(e){}
  fitFs();
  refresh();
}

function closeFs(){
  if(!fsOn) return;
  fsOn = false;
  const root = $("fsRoot");
  root.classList.remove("on");
  if(document.fullscreenElement){
    try{ document.exitFullscreen(); }catch(e){}
  }
  feedZoom.reset();
  setTimeout(() => {
    fsMoveScreen(false);
    root.hidden = true;
    refresh();
  }, 200);
}

$("fsOpen").onclick = openFs;
$("fsClose").onclick = closeFs;
document.addEventListener("keydown", e => { if(e.key === "Escape" && fsOn) closeFs(); });
document.addEventListener("fullscreenchange", () => {
  if(!document.fullscreenElement && fsOn) closeFs();
});

function setFsPanel(s){
  const link = LINK[linkState];
  $("fsLed").classList.toggle("dead", linkState !== "online");
  $("fsConnPill").className = "pill " + link[0];
  $("fsConnPill").querySelector("use").setAttribute("href", "#" + link[1]);
  $("fsConn").textContent = link[2];
  $("fsLat").textContent = s.latency_ms;
  $("fsLatAvg").textContent = s.avg_latency_ms;
  $("fsFps").textContent = s.cam_fps ? s.cam_fps.toFixed(1) : "–";
  tickClock();
  const c = s.counts || {};
  $("fsBottle").textContent = c.bottle || 0;
  $("fsBag").textContent = c.bag || 0;
  $("fsCont").textContent = c.food_container || 0;
  const p = s.threshold > 0 ? Math.round(s.smoothed / s.threshold * 100) : 0;
  $("fsItems").textContent = s.smoothed;
  $("fsLimit").textContent = "OF " + s.threshold;
  $("fsMeterFill").style.height = Math.min(100, p) + "%";
  $("fsMeter").title = `${p}% of limit · ${s.smoothed} of ${s.threshold} items`;
  const [lvName, label, ico] = levelOf(s, p);
  $("fsMeter").className = "fk-meter lv-" + lvName;
  $("fsState").className = "fs-state lv-" + lvName;
  $("fsStateTxt").textContent = label;
  $("fsState").querySelector("use").setAttribute("href", "#" + ico);
  paintMuteBar($("fsMuteBar"), $("fsMuteTxt"), $("fsMuteBtn"),
               $("fsUnmuteBtn"), $("fsMuteFor"), $("fsAutoBtn"), s);
}

$("fsCapture").onclick = () => $("capture").click();
/* The drawing keys in fullscreen share the handlers of the Monitored area
   card. Clear wipes the points being placed; pressed again with none left,
   it removes the saved area, as the card's Clear does. */
$("fsDraw").onclick = () => $("new").click();
$("fsEdit").onclick = () => $("edit").click();
$("fsApply").onclick = () => $("apply").click();
```

```
$("fsUndo").onclick = () => $("undo").click();
$("fsWipe").onclick = () => {
  if(editing && draft && draft.length) return setEditing(true, []);
  $("clear").click();
};
$("fsCancel").onclick = () => setEditing(false);
$("fsMuteBtn").onclick = () => doMute(Number($("fsMuteFor").value), $("fsMuteFor"));
$("fsUnmuteBtn").onclick = () => doUnmute();

async function setRead(ids, read){
  await post("/api/alerts/read", {ids, read});
  loadLogs();
}
/* Both buttons act on exactly the rows on screen. With no filter at all the
   Pi can do the whole lot in one go; otherwise we send the ids we are showing.
   Dates alone are the one exception for Delete: the Pi takes the range and
   clears records older than the 300 this page has loaded. */
$("markAll").onclick = async () => {
  const list = view.filter(a => !a.read);
  if(!list.length) return toast("Nothing unread", "i-check");
  const whole = kind === "all" && !$("dFrom").value && !$("dTo").value;
  await post("/api/alerts/read", whole ? {all: true} : {ids: list.map(a => a.id)});
  toast(whole ? "All marked read" : "Marked " + scopeText(list.length) + " read", "i-check");
  loadLogs();
};

$("delShown").onclick = () => {
  if(!view.length) return toast("Nothing to delete","i-warn");
  const f = $("dFrom").value, t = $("dTo").value;
  const whole = kind === "all" && !f && !t;
  if(whole)
    return askDelete(`Delete all ${rows.length} records and their snapshot images? This cannot be undone.`,
                     {all: true});
  if(kind === "all")
    // A range alone also clears older records the page never loaded, so the
    // count can only be a floor.
    return askDelete(`Delete at least ${scopeText(view.length)} and their snapshot images? This cannot be
undone.`,
                     {from: f || null, to: t || null});
  askDelete(`Delete ${scopeText(view.length)} and their snapshot images? This cannot be undone.`,
            {ids: view.map(a => a.id)});
};

$("logs").addEventListener("click", e => {
  const d2 = e.target.closest("[data-read]");
  if(d2){
    const a = view[Number(d2.dataset.read)];
    return setRead([a.id], !a.read);
  }
  const v = e.target.closest("[data-view]");
  if(v) return openViewer(Number(v.dataset.view));
  const d = e.target.closest("[data-del]");
  if(d){
    const a = view[Number(d.dataset.del)];
    askDelete(`Delete this ${((EVENTS[a.event]||["record"])[0]).toLowerCase()} from
${stamp(a.timestamp).short}?`,
              {ids:[a.id]});
  }
});

/* Times are shown in 12-hour form. The clock is always Philippine time, whatever
   the device viewing it is set to. Stored record times are the Pi's own local time. */
const MON = ["Jan","Feb","Mar","Apr","May","Jun","Jul","Aug","Sep","Oct","Nov","Dec"];
const t12 = (h, m, sec) => `${h % 12 || 12}:${String(m).padStart(2,"0")}${sec == null ? "" : ":" +
String(sec).padStart(2,"0")} ${h < 12 ? "AM" : "PM"}`;
function stamp(ts){
  const m = /^(\d{4})-(\d\d)-(\d\d)[T ](\d\d):(\d\d)(?::(\d\d))?/.exec(ts || "");
  if(!m) return {day: "", tm: "", short: ts || ""};
  const day = `${Number(m[3])} ${MON[Number(m[2]) - 1]} ${m[1]}`;
  const tm = t12(Number(m[4]), Number(m[5]), m[6] == null ? null : Number(m[6]));
  return {day, tm, short: `${day}, ${t12(Number(m[4]), Number(m[5]))}`};
}
const PH = new Intl.DateTimeFormat("en-US", {timeZone: "Asia/Manila", weekday: "short", day: "numeric",
  month: "short", year: "numeric", hour: "numeric", minute: "2-digit", second: "2-digit", hour12: true});
function phNow(){
  const p = {};
  for(const x of PH.formatToParts(new Date())) p[x.type] = x.value;
  const h = Number(p.hour) % 12 || 12, ap = p.dayPeriod.toUpperCase();
  return {head: `${p.weekday} ${p.day} ${p.month}, ${h}:${p.minute} ${ap}`,
          full: `${p.day} ${p.month} ${p.year}, ${h}:${p.minute}:${p.second} ${ap}`};
}
```

```
let clockSynced = true;
function tickClock(){
  const n = phNow();
  $("clk").classList.toggle("warn", !clockSynced);
  $("clkTxt").textContent = clockSynced ? n.head : "Clock not synced";
  $("clk").title = clockSynced ? "Philippine time"
    : "The Pi's clock is not synchronised, so this time may be wrong. " + n.head;
  if(fsOn) $("fsTime").textContent = (clockSynced ? "" : "⚠ ") + n.full;
}
setInterval(tickClock, 1000);

let picMode = "ann", picRec = null;
function showPic(){
  const a = picRec;
  if(!a) return;
  const clean = picMode === "clean" && !!a.clean;
  const src = clean ? "/snapshots/clean/" + encodeURIComponent(a.clean)
                    : "/snapshots/" + encodeURIComponent(a.snapshot);
  $("vImg").src = src; $("zImg").src = src;
  $("vPic").hidden = !a.clean;
  document.querySelectorAll("#vPic button").forEach(b =>
    b.setAttribute("aria-pressed", b.dataset.pic === (clean ? "clean" : "ann") ? "true" : "false"));
}
document.querySelectorAll("#vPic button").forEach(b => b.addEventListener("click", () => {
  picMode = b.dataset.pic; showPic();
  document.querySelectorAll("#logs .thumb").forEach(t => {
    const a = view[Number(t.dataset.view)];
    if(a) t.querySelector("img").src = thumbSrc(a);
  });
}));

const mb = n => n >= 1e9 ? (n / 1e9).toFixed(1) + " GB" : n >= 1e6 ? (n / 1e6).toFixed(1) + " MB"
  : Math.max(0, Math.round((n || 0) / 1e3)) + " KB";
function fillClean(s){
  if(s.clean_mode === undefined) return;
  document.querySelectorAll("#clMode button").forEach(b =>
    b.setAttribute("aria-pressed", b.dataset.cl === s.clean_mode ? "true" : "false"));
  const n = s.clean_count || 0;
  $("clUse").textContent = `${n} pic${n === 1 ? "" : "s"} · ${mb(s.clean_bytes)}`;
}
const CLEAN_SAY = {off: "Clean copies off", manual: "Clean copies for captures only",
                   all: "Clean copies for captures, alerts and tests"};
document.querySelectorAll("#clMode button").forEach(b => b.addEventListener("click", async () => {
  const j = await post("/api/clean", {mode: b.dataset.cl});
  if(!j.ok) return toast("Could not change clean copies", "i-warn");
  fillClean(j); toast(CLEAN_SAY[j.clean_mode], "i-shutter");
}));

function openViewer(i){
  const a = view[i];
  if(!a || !a.snapshot) return;
  picRec = a; showPic();
  const ev = EVENTS[a.event] || [a.event || "Snapshot", "i-shutter"];
  const st = stamp(a.timestamp), ts = st.short;
  const [day, tm] = [st.day, st.tm];
  for(const id of ["vEv","zEv"]){
    $(id).className = "ev " + (a.event||"");
    $(id).innerHTML = `<svg class="ico"><use href="#${ev[1]}"/></svg>${ev[0]}`;
  }
  $("vTitle").textContent = ts;
  const items = a.smoothed_count || 0, lim = a.threshold_used || 0;
  const ratio = lim > 0 ? items / lim : 0;
  const lv = ratio >= 1 ? "bad" : ratio >= .8 ? "near" : ratio >= .5 ? "warn" : "ok";
  const most = Math.max(1, a.n_bottle, a.n_bag, a.n_food_container);
  const cls = (k, name, ico, n) =>
    `<div class="cl ${k}"><svg class="ico"><use href="#${ico}"/></svg><span>${name}</span><b>${n}</b>
      <i class="mini"><i style="width:${Math.round(n / most * 100)}%"></i></i></div>`;
  $("vMeta").innerHTML = `
    <div class="vi-items lv-${lv}">
      <span class="vi-lb"><svg class="ico"><use href="#i-layers"/></svg>Items in area</span>
      <div class="vi-big"><b>${items}</b><span>/ ${lim} limit</span></div>
      <i class="meter"><i style="width:${Math.min(100, Math.round(ratio * 100))}%"></i></i>
    </div>
    <div class="vi-cls">
      ${cls("c-bottle","Bottle","i-bottle",a.n_bottle)}
      ${cls("c-bag","Bag","i-bag",a.n_bag)}
      ${cls("c-cont","Container","i-cont",a.n_food_container)}
    </div>
    <div>
      <div class="vi-row conf"><svg class="ico"><use href="#i-target"/></svg><span>Peak
confidence</span><b>${pct(a.peak_confidence)}</b></div>
```

```
      <div class="vi-row lim"><svg class="ico"><use href="#i-flag"/></svg><span>Limit then</span><b>${lim}</b></div>
      <div class="vi-row day"><svg class="ico"><use href="#i-cal"/></svg><span>Date</span><b>${day}</b></div>
      <div class="vi-row tm"><svg class="ico"><use href="#i-clock"/></svg><span>Time</span><b>${tm}</b></div>
    </div>`;
  $("zInfo").innerHTML = `
    <span title="Items against the limit"><svg class="ico"><use href="#i-layers"/></svg>${items}/${lim}</span>
    <span title="Bottle"><svg class="ico c-bottle"><use href="#i-bottle"/></svg>${a.n_bottle}</span>
    <span title="Bag"><svg class="ico c-bag"><use href="#i-bag"/></svg>${a.n_bag}</span>
    <span title="Container"><svg class="ico c-cont"><use href="#i-cont"/></svg>${a.n_food_container}</span>
    <span class="zt"><svg class="ico"><use href="#i-clock"/></svg><b>${tm}</b>${day}</span>`;
  $("viewer").showModal();
}
$("vClose").onclick = () => $("viewer").close();
$("vOpen").onclick = () => $("zoom").showModal();
$("zoom").addEventListener("click", e => { if(!e.target.closest(".zpic")) $("zoom").close(); });
$("zoom").addEventListener("close", () => picZoom.reset());
$("viewer").addEventListener("click", e => { if(e.target===$("viewer")) $("viewer").close(); });

/* ---------------- history filter ---------------- */
/* The kinds match the app's filter bar one for one, so a row looks the same
   in both places. "suppressed" is deliberately only under All. */
const NO_COUNT = ["low_battery_shutdown","manual_shutdown"];
const KINDS = {all:null, alerts:["accumulation"], captures:["manual"], tests:["test"],
               mutes:["muted","auto_muted","unmuted"],
               power:["low_battery_shutdown","manual_shutdown"]};
const KIND_WORD = {all:["record","records"], alerts:["alert","alerts"],
                   captures:["capture","captures"], tests:["test","tests"],
                   mutes:["mute record","mute records"], power:["shutdown","shutdowns"]};

const today = () => new Date(Date.now() - new Date().getTimezoneOffset()*60000)
                      .toISOString().slice(0,10);
const dayOf = a => (a.timestamp || "").slice(0,10);

function clampDates(moved){
  const f = $("dFrom"), t = $("dTo"), now = today();
  f.max = now; t.max = now;
  if(f.value > now) f.value = now;
  if(t.value > now) t.value = now;
  // The range can never run backwards: the box that was not touched moves along.
  if(f.value && t.value && f.value > t.value){
    if(moved === "from") t.value = f.value; else f.value = t.value;
  }
  f.max = t.value || now;
  t.min = f.value || "";
}

function inRange(a){
  const f = $("dFrom").value, t = $("dTo").value, d = dayOf(a);
  if(!d) return !f && !t;
  return (!f || d >= f) && (!t || d <= t);
}

function shown(){
  const want = KINDS[kind];
  return rows.filter(a => (!want || want.includes(a.event)) && inRange(a));
}

function niceDay(d){
  if(!d) return "";
  const [y,m,dd] = d.split("-");
  return Number(dd) + " " +
["Jan","Feb","Mar","Apr","May","Jun","Jul","Aug","Sep","Oct","Nov","Dec"][Number(m)-1]
         + (d.slice(0,4) === today().slice(0,4) ? "" : " " + y);
}

/* "2 alerts on 12 Oct", used by the line under the tools and by the
   delete confirmation, so both always say the same thing. */
function scopeText(n){
  const [one, many] = KIND_WORD[kind];
  const f = $("dFrom").value, t = $("dTo").value;
  let when = "";
  if(f && t) when = f === t ? " on " + niceDay(f) : ` from ${niceDay(f)} to ${niceDay(t)}`;
  else if(f) when = " from " + niceDay(f) + " onward";
  else if(t) when = " up to " + niceDay(t);
  return `${n} ${n === 1 ? one : many}${when}`;
}

```

```
function paintScope(n){
  const all = kind === "all" && !$("dFrom").value && !$("dTo").value;
  $("scopeLine").textContent = n ? "Showing " + (all ? `all ${n} record${n===1?"":"s"}` : scopeText(n)) : "";
  document.querySelectorAll("#fbar button").forEach(b =>
    b.setAttribute("aria-pressed", String(b.dataset.f === kind)));
}

function applyFilter(reset){
  if(reset !== false){ upTo = BATCH; document.querySelector(".tablewrap").scrollTop = 0; }
  renderPage();
}

$("fbar").addEventListener("click", e => {
  const b = e.target.closest("button");
  if(!b) return;
  kind = b.dataset.f;
  applyFilter();
});

$("quick").addEventListener("click", e => {
  const b = e.target.closest("button");
  if(!b) return;
  const q = b.dataset.q, now = today();
  if(q === "any"){ $("dFrom").value = ""; $("dTo").value = ""; }
  else if(q === "today"){ $("dFrom").value = now; $("dTo").value = now; }
  else {
    // Count back in whole UTC days. Going through local midnight and
    // toISOString() slipped a day east of UTC (the Pi is UTC+8), so the range
    // came out as 8 or 31 days and the 7 days / 30 days chip never lit up.
    const back = new Date(now + "T00:00:00Z");
    back.setUTCDate(back.getUTCDate() - (Number(q) - 1));
    $("dFrom").value = back.toISOString().slice(0,10);
    $("dTo").value = now;
  }
  clampDates("from");
  paintQuick();
  applyFilter();
});

function paintQuick(){
  const f = $("dFrom").value, t = $("dTo").value, now = today();
  let on = "";
  if(!f && !t) on = "any";
  else if(f === now && t === now) on = "today";
  else if(t === now && f){
    const days = Math.round((new Date(t) - new Date(f)) / 86400000) + 1;
    if(days === 7) on = "7"; else if(days === 30) on = "30";
  }
  document.querySelectorAll("#quick button").forEach(b =>
    b.setAttribute("aria-pressed", String(b.dataset.q === on)));
}

clampDates("from"); paintQuick();
$("dFrom").onchange = () => { clampDates("from"); paintQuick(); applyFilter(); };
$("dTo").onchange = () => { clampDates("to"); paintQuick(); applyFilter(); };

/* History scrolls without pages. The Pi sends the whole log at once, so a
   batch is only how many rows are drawn; reaching the bottom draws the next
   batch. Each row's number is its place in the whole log, so it does not
   change with the filter or with how far the list has been scrolled. */
function rowHtml(a, i){
  const ev = EVENTS[a.event] || [a.event||"Unknown","i-box"];
  const urgent = !a.read && a.event === "accumulation";
  return `<div class="lr ${a.event||""} ${a.read ? "read" : "unread"} ${urgent ? "urgent" : ""}" role="row">
      <div class="c-no" role="cell">${a.no}</div>
      <div class="c-rd" role="cell"><button class="dot" type="button" data-read="${i}"
          aria-label="${a.read ? "Mark as unread" : "Mark as read"}" title="${a.read ? "Mark as unread" : "Mark as read"}"></button></div>
      <div role="cell">${stamp(a.timestamp).short}</div>
      <div role="cell"><span class="ev ${a.event||""}"><svg class="ico"><use href="#${ev[1]}"/></svg>${ev[0]}</span></div>
      <div class="c-n" role="cell">${NO_COUNT.includes(a.event)
            ? `<svg class="ico"><use href="#${ev[1]}"/></svg>` : a.smoothed_count}</div>
      <div class="c-pic" role="cell">${a.snapshot
            ? `<button class="thumb" type="button" data-view="${i}" data-snd="open" aria-label="View snapshot ${a.no}" title="View snapshot"><img src="${thumbSrc(a)}" alt="" loading="lazy" decoding="async"><span class="th-eye"><svg class="ico"><use href="#i-eye"/></svg></span></button>`
            : `<span class="noimg">No image</span>`}</div>
      <div class="c-act" role="cell"><button class="btn sm danger" type="button" data-del="${i}"
```

```
2882            aria-label="Delete this record"><svg class="ico a-tilt"><use href="#i-
    trash"/></svg></button></div></div>`;
2883 }
2884
2885 function thumbSrc(a){
2886   return (picMode === "clean" && a.clean ? "/snapshots/clean/" + encodeURIComponent(a.clean)
2887           : "/snapshots/" + encodeURIComponent(a.snapshot)) + "?thumb=1";
2888 }
2889
2890 function paintWhere(){
2891   const n = Math.min(upTo, view.length);
2892   $("where").textContent = view.length ? `${n} of ${view.length} shown` : "";
2893   $("logMore").hidden = n >= view.length;
2894 }
2895
2896 function renderPage(){
2897   view = shown();
2898   $("noLogs").style.display = view.length ? "none" : "flex";
2899   $("noLogsText").textContent = rows.length
2900     ? "No records match. Change the filter or the dates."
2901     : "No events yet. Alerts, captures and tests appear here.";
2902   $("logs").innerHTML = view.slice(0, upTo).map(rowHtml).join("");
2903   paintWhere();
2904   $("logCount").textContent = unreadCount() ? `(${unreadCount()})` : "";
2905   $("markAll").disabled = !view.some(a => !a.read);
2906   $("delShown").disabled = !view.length;
2907   paintScope(view.length);
2908   requestAnimationFrame(moreIfRoom);
2909 }
2910
2911 function unreadCount(){ return rows.reduce((n,r) => n + (r.read ? 0 : 1), 0); }
2912
2913 function moreRows(){
2914   const from = Math.min(upTo, view.length);
2915   if(from >= view.length) return false;
2916   upTo = from + BATCH;
2917   $("logs").insertAdjacentHTML("beforeend", view.slice(from, upTo).map((a, k) => rowHtml(a, from +
    k)).join(""));
2918   paintWhere();
2919   return true;
2920 }
2921 /* A tall screen can fit the first batch with no scrollbar, and then there is
2922    no scrolling to ask for more, so keep adding while the list is short. */
2923 function moreIfRoom(){
2924   const wrap = document.querySelector(".tablewrap");
2925   if(wrap.clientHeight && wrap.scrollHeight - wrap.scrollTop - wrap.clientHeight < 240 && moreRows())
2926     requestAnimationFrame(moreIfRoom);
2927 }
2928 document.querySelector(".tablewrap").addEventListener("scroll", moreIfRoom, {passive: true});
2929 window.addEventListener("resize", () => requestAnimationFrame(moreIfRoom));
2930
2931 $("refreshLogs").onclick = () => { loadLogs(true); toast("History refreshed","i-refresh"); };
2932
2933 let logSig = "";
2934 async function loadLogs(force){
2935   try{
2936     const j = await (await fetch("/api/alerts?limit=0" + (force || !logSig ? "" : "&sig=" +
    encodeURIComponent(logSig)))).json();
2937     if(j.same) return;
2938     logSig = j.sig || "";
2939     rows = j.alerts || [];
2940     const total = Math.max(rows.length, j.total || 0);
2941     rows.forEach((a, i) => { a.no = total - i; });
2942     renderPage();
2943   }catch(e){}
2944 }
2945
2946 // Same thresholds as levelOf() in the app (MonitorScreen.kt). Change both together.
2947 function levelOf(s, p){
2948   if(s.alert_active && s.muted) return ["muted","Alert muted","i-belloff"];
2949   if(s.alert_active) return ["bad","Alert raised","i-bell"];
2950   if(p >= 80) return ["near","Near the limit","i-gauge"];
2951   if(p >= 50) return ["warn","Building up","i-up"];
2952   return ["ok","Normal","i-ok"];
2953 }
2954 function setLevel(s){
2955   const p = s.threshold>0 ? Math.round(s.smoothed/s.threshold*100) : 0;
2956   const [lv, label, ico] = levelOf(s, p);
2957   $("level").className = "box level lv-"+lv;
2958   $("bar").style.width = Math.min(p,100)+"%";
2959   $("pctTag").textContent = p+"% of limit";
```

```
  $("total").textContent = s.smoothed;
  $("limit").textContent = s.threshold;
  $("state").textContent = label;
  $("stateIco").querySelector("use").setAttribute("href", "#"+ico);
}

function bump(id, val){
  const el = $(id);
  if(prevCounts[id] !== undefined && prevCounts[id] !== val){
    const box = el.closest(".box");
    box.classList.remove("bump"); void box.offsetWidth; box.classList.add("bump");
  }
  prevCounts[id] = val;
  el.textContent = val;
}

// Polled every second. If the page sticks on 'No link to Pi', this fetch is failing: check that
// garbageguard_live.py is still running on port 8080.
async function refresh(){
  try{
    const s = await (await fetch("/api/state")).json();
    last = s;
    clockSynced = s.clock_synced !== false || s.clock_settling === true; tickClock();
    setLink(s.connected ? "online" : "nocam");
    $("connPill").title = viewText(s);
    cloud = s.cloud || null;
    setViewers(s.viewers);
    paintScreen(s);
    noteCamera(s);
    $("flag").classList.toggle("show", !!s.alert_active && !s.muted);
    setMuteBar(s);
    if(fsOn) setFsPanel(s);
    setLevel(s);
    paintBubble();
    const c = s.counts||{};
    bump("nBottle", c.bottle||0); bump("nBag", c.bag||0); bump("nCont", c.food_container||0);
    $("lat").textContent = s.latency_ms;
    $("latAvg").textContent = s.avg_latency_ms;
    $("fps").textContent = (s.cam_fps ? s.cam_fps.toFixed(1) : "–") + " FPS";
    $("rearm").textContent = s.rearm;
    if(!$("conf").dataset.dirty && document.activeElement !== $("conf"))
      $("conf").value = Math.round(s.conf*100);
    if(!$("thresh").dataset.dirty && document.activeElement !== $("thresh"))
      $("thresh").value = s.threshold;
  }catch(e){
    setMuteBar({...(last||{}), alert_active:false, muted:false, mute_left:0});
    setLink("nopi");
  }
}

/* Three link states: the Pi answers and the camera streams, the Pi answers
   but the camera does not, or the Pi itself cannot be reached. */
const LINK = {online:["online","i-signal","Camera online"],
              nocam:["nocam","i-camoff","No camera"],
              nopi:["offline","i-nolink","No link to Pi"]};
let linkState = "online";
function viewText(s){
  if(!s.frame_size) return "";
  const kind = s.stream === "main" ? "Main stream" : "Sub-stream";
  const area = s.detect_box ? "the monitored area" : "the whole picture";
  return `${kind}, ${s.frame_size.replace("x","×")}. Detecting on ${area} at ${s.detect_size} px.`
    + (s.stream_note ? " " + s.stream_note + "." : "");
}
function setLink(st){
  linkState = st;
  const [cls, ico, txt] = LINK[st];
  $("connPill").className = "pill " + cls;
  $("connIco").querySelector("use").setAttribute("href", "#" + ico);
  $("conn").textContent = txt;
  const down = st !== "online";
  $("led").classList.toggle("dead", down);
  $("screen").classList.toggle("nosig", down);
  const off = $("offline");
  off.classList.toggle("show", down);
  const busy = st === "nocam" && rfWaiting();
  off.classList.toggle("busy", busy);
  off.querySelector("use").setAttribute("href", busy ? "#i-refresh" : "#" + (st === "nopi" ? "i-nolink" :
"i-camoff"));
  off.lastChild.textContent = st === "nopi" ? "No link to Pi" : busy ? "Reconnecting camera…" : "No camera
signal";
  if(st === "nopi"){ setBuzzWait(true); $("mdlCard").classList.add("wait"); }
```

```
}

let viewers = null, cloud = null;
function setViewers(v){
  viewers = v || null;
  const b = $("phn"), apps = v ? v.apps : 0, web = v ? v.browsers : 0;
  b.className = "phn " + (apps ? "app" : web ? "web" : "none");
  b.querySelector("use").setAttribute("href", apps || web ? "#i-phone" : "#i-phoneoff");
  $("phnN").textContent = apps + web >= 1 ? apps + web : "";
  $("fsPhn").querySelector("use").setAttribute("href", apps || web ? "#i-phone" : "#i-phoneoff");
  $("fsPhnT").textContent = apps ? (apps > 1 ? apps + " apps" : "App on") : web ? "Browser" : "No app";
  $("fsPhn").classList.toggle("on", !!apps);
  paintPhones();
  const cu = (cloud && cloud.usage) || null, viaFb = v ? v.list.some(r => r.via === "cloud") : false;
  const cs = cloudState(cloud);
  b.classList.toggle("cloud", cs !== "off");
  b.classList.toggle("idle", cs === "standby" && !viaFb);
  b.classList.toggle("bad", cs === "err" || !!(cu && cu.level === "bad"));
  $("phnC").querySelector("use").setAttribute("href", "#" + CLOUD[cs === "standby" && viaFb ? "active" : cs][1]);
  b.title = (apps ? `Mobile app connected (${apps})` : web ? `Viewed from another device (${web})` : "No phone connected")
    + (cs !== "off" ? " · " + CLOUD[cs][0] : "");
}
function since(sec){
  if(sec < 60) return sec + " s";
  if(sec < 3600) return Math.floor(sec/60) + " min " + (sec%60) + " s";
  return Math.floor(sec/3600) + " h " + Math.floor(sec%3600/60) + " min";
}
const VIA = {
  direct: ["Direct", ""],
  shared: ["Shared address", "This IP and MAC belong to a router between this phone and the Pi (for example a separate Wi-Fi router). Every phone behind it shows the same pair. The phone is still counted on its own."],
  remote: ["Remote", "Connected from outside this network, so the IP is the remote link's address and the MAC cannot be seen."],
  cloud: ["Firebase", "Away from this Wi-Fi, so the app talks to the Pi through Firebase. There is no IP or MAC, and the live view is a still picture every few seconds instead of video."]
};
function gb(n){ return (n / 1073741824) >= 1 ? (n/1073741824).toFixed(2) + " GB" : Math.round(n/1048576) + " MB"; }
function paintUsage(u){
  const box = $("phnUse");
  if(!u){ box.style.display = "none"; return; }
  box.style.display = "flex";
  box.className = "use " + (u.level || "ok");
  $("useN").textContent = "about " + gb(u.down_bytes) + " of " + gb(u.limit_bytes);
  $("useBar").style.width = Math.min(100, Math.round((u.fraction || 0) * 100)) + "%";
  $("useNote").textContent = u.note ||
    "Rough estimate counted by the Pi, resets on the 1st. The exact figure is in the Firebase console.";
}
const CLOUD = {
  off:     ["Firebase off", "i-cloudoff", "Firebase is switched off. Phones still work on the same Wi-Fi."],
  standby: ["Firebase on standby", "i-cloudidle", "No phone is using Firebase right now. The Pi keeps it updated slowly and speeds up when one joins from another network."],
  active:  ["Firebase active", "i-cloud", "A phone on another network is using Firebase right now."],
  err:     ["Firebase error", "i-clouderr", ""]
};
function cloudState(c){
  if(!c || !c.enabled) return "off";
  if(!c.ok) return "err";
  return c.watchers > 0 ? "active" : "standby";
}
function paintPhones(){
  const d = $("phnDlg");
  if(!d.open) return;
  const v = viewers || {apps:0, browsers:0, list:[]};
  const parts = [];
  if(v.apps) parts.push(`${v.apps} app${v.apps===1?"":"s"}`);
  if(v.browsers) parts.push(`${v.browsers} browser${v.browsers===1?"":"s"}`);
  $("phnSum").textContent = parts.join(" · ") || "Nothing connected";
  const cc = $("phnCloud"), c = cloud || {}, st = cloudState(c), info = CLOUD[st];
  cc.className = "tagx cl-chip " + {off: "off", standby: "idle", active: "on", err: "err"}[st];
  cc.querySelector("use").setAttribute("href", "#" + info[1]);
  cc.querySelector("span").textContent = info[0] + (st === "active" && c.watchers > 1 ? ` · ${c.watchers} phones` : "");
  cc.title = st === "err" ? (c.error || "Firebase is not answering.") : info[2];
  paintUsage(c.usage);
  if(!v.list.length){
    $("phnList").innerHTML = `<div class="empty" style="display:flex"><svg class="ico"><use href="#i-phoneoff"/></svg>
```

```
      <span>No phone is polling the Pi right now. A phone counts as gone 4 seconds after it stops.</span></div>`;
    return;
  }
  const row = (ico, k, val) => val ? `<div class="pr"><svg class="ico"><use href="#${ico}"/></svg><span>${k}</span><b>${esc(String(val))}</b></div>` : "";
  $("phnList").innerHTML = v.list.map(r => {
    const app = r.kind === "app";
    const name = r.device || r.hostname || (app ? "Android phone" : (r.browser || "Browser") + (r.os ? " on " + r.os : ""));
    const viaCloud = r.via === "cloud";
    return `<div class="pc ${app ? "app" : "web"}${viaCloud ? " cloud" : ""}">
      <div class="ph"><span class="pb"><svg class="ico"><use href="#${viaCloud ? "i-cloud" : app ? "i-phone" : "i-image"}"/></svg></span>
        <div><b>${esc(name)}</b><small>${viaCloud ? "Garbage-Guard app through Firebase" : app ? "Garbage-Guard app" : "Dashboard in a browser"}</small></div>
        <span class="tagx ${app ? "ok" : "warn"}">${app ? "App" : "Browser"}</span>
        ${VIA[r.via] ? `<span class="tagx via-${r.via}">${VIA[r.via][0]}</span>` : ""}
        ${r.mode ? `<span class="tagx ${r.mode === "background" ? "warn" : "ok"}">${r.mode === "background" ? "In background" : "Open"}</span>` : ""}
      </div>
      <div class="pg">
        ${viaCloud ? "" : row("i-signal","IP address",r.ip)}
        ${viaCloud ? "" : row("i-tag", r.via === "shared" ? "Router MAC" : "MAC address",
              r.via === "remote" ? "Not available remotely" : (r.mac || "Not in the Pi's table yet"))}
        ${row("i-layers","Network name",r.hostname)}
        ${row("i-phone","Device",r.device)}
        ${row("i-gear","System",r.os)}
        ${row("i-eye","Browser",r.browser)}
        ${row("i-box","App version",r.app_version)}
        ${row("i-clock","Connected for",since(r.since_s))}
        ${row("i-refresh","Last update",r.age_s < 1.5 ? "just now" : r.age_s + " s ago")}
        ${row("i-act","Requests",r.hits)}
      </div>
      ${VIA[r.via] && VIA[r.via][1] ? `<p class="pnote via-${r.via}"><svg class="ico"><use href="#i-warn"/></svg><span>${VIA[r.via][1]}</span></p>` : ""}
      ${r.ua ? `<p class="pua">${esc(r.ua)}</p>` : ""}
    </div>`;
  }).join("");
}
$("phn").onclick = () => {
  $("phnDlg").showModal(); $("phnList").classList.add("fresh"); paintPhones();
  setTimeout(() => $("phnList").classList.remove("fresh"), 400);
};
$("phnClose").onclick = () => $("phnDlg").close();
$("phnDlg").addEventListener("click", e => { if(e.target === $("phnDlg")) $("phnDlg").close(); });

const feed = $("feed");
let pending = false, saverUp = false;
// Loads /frame.jpg into a spare Image and swaps it in only when complete, so the feed never shows a
// half-drawn frame. Skipped while a frame is loading, the screen saver is up, or the Monitor tab is
// hidden.
function pullFrame(){
  if(pending || saverUp || (!fsOn && !$("monitor").classList.contains("on"))) return;
  pending = true;
  const img = new Image();
  img.onload = () => {
    feed.src = img.src; pending = false;
    const ar = img.naturalWidth / img.naturalHeight;
    if(ar > 0 && Math.abs(ar - feedAr) > 0.01){ feedAr = ar; fitFs(); }
  };
  img.onerror = () => { pending = false; };
  img.src = "/frame.jpg?t=" + Date.now();
}

pullFrame(); refresh(); loadLogs();
// About 8 pictures a second, state every second, history every 5 s (only while the History tab is
// open).
setInterval(pullFrame, 120);
setInterval(refresh, 1000);
setInterval(() => { if($("history").classList.contains("on")) loadLogs(); }, 5000);

/* ---------------- UPS battery ---------------- */
let batt = null;
function fmtSigned(v, dp){
  if(v == null) return "–";
  const t = Math.abs(v).toFixed(dp);
  return v < 0 && Number(t) !== 0 ? "−" + t : (v > 0 && Number(t) !== 0 ? "+" + t : t);
}
function setBattery(b){
  batt = b;
```

```
  const box = $("batt");
  if(!b || !b.ok){
    box.className = "box batt b-none";
    $("battSrc").textContent = "No UPS found";
    $("battPct").textContent = "–"; $("battV").textContent = "–";
    $("battA").textContent = "–"; $("battW").textContent = "–";
    $("battFill").style.width = "0";
    paintBubble(); paintBattDlg(); return;
  }
  const p = Math.max(0, Math.min(100, Math.round(b.percent)));
  const lv = p <= 20 ? "b-bad" : p <= 40 ? "b-warn" : "b-ok";
  const mode = b.charging ? "b-chg" : b.on_ac ? "b-ac" : "b-dis";
  box.className = `box batt ${lv} ${mode}`;
  $("battIco").querySelector("use").setAttribute("href", b.on_ac ? "#i-plug" : "#i-batt");
  const left = b.minutes_left;
  const hm = left == null ? "" : left >= 60 ? ` · ${Math.floor(left/60)} h ${left%60} m` : ` · ${left} m`;
  $("battSrc").innerHTML = b.charging ? `On AC, <b>charging</b>${hm}`
                         : b.on_ac ? `On AC, <b>${p >= 99 ? "full" : "idle"}</b>`
                         : `On battery${hm} left`;
  $("battPct").textContent = p;
  $("battFill").style.width = p + "%";
  $("battV").textContent = b.voltage_v.toFixed(2);
  $("battA").textContent = fmtSigned(b.current_a, 2);
  $("battW").textContent = fmtSigned(b.power_w, 1);
  const sign = b.current_a < -0.005 ? "neg" : b.current_a > 0.005 ? "pos" : "";
  $("battAw").className = $("battWw").className = sign;
  paintBubble(); paintBattDlg();
}

function paintBattDlg(){
  const d = $("battDlg");
  if(!d.open) return;
  const b = batt, body = $("bdBody"), tag = $("bdTag");
  if(!b || !b.ok){
    body.className = "bd b-none";
    tag.className = "tagx warn"; tag.textContent = "No UPS";
    $("bdPct").textContent = "–"; $("bdFill").style.width = "0";
    $("bdSrc").textContent = "This Pi is not reporting a battery. Check that the UPS HAT is seated and I2C is on.";
    ["bdV","bdA","bdW"].forEach(id => $(id).textContent = "–");
    $("bdCells").innerHTML = ""; $("bdInfo").hidden = true;
    return;
  }
  const p = Math.max(0, Math.min(100, Math.round(b.percent)));
  const lv = p <= 20 ? "b-bad" : p <= 40 ? "b-warn" : "b-ok";
  body.className = `bd ${lv} ${b.charging ? "b-chg" : b.on_ac ? "b-ac" : "b-dis"}`;
  const low = lv === "b-bad" && !b.charging;
  [tag.className, tag.textContent] = low ? ["tagx bad","Low"] : b.charging ? ["tagx ok","Charging"]
                                   : b.on_ac ? ["tagx ok","On AC"] : ["tagx warn","On battery"];
  $("bdIco").querySelector("use").setAttribute("href", b.on_ac ? "#i-plug" : "#i-batt");
  $("bdPct").textContent = p;
  $("bdFill").style.width = p + "%";
  $("bdSrc").innerHTML = $("battSrc").innerHTML;
  $("bdV").textContent = b.voltage_v.toFixed(2);
  $("bdA").textContent = fmtSigned(b.current_a, 2);
  $("bdW").textContent = fmtSigned(b.power_w, 1);
  const sign = b.current_a < -0.005 ? "neg" : b.current_a > 0.005 ? "pos" : "";
  $("bdAw").className = $("bdWw").className = "well " + sign;
  const cells = b.cells_v || [];
  $("bdCells").innerHTML = cells.map((v, i) =>
    `<div class="cellv${v > 0 && v < 3.2 ? " lowc" : ""}"><span>Cell ${i+1}</span><b>${v.toFixed(2)} V</b></div>`).join("");
  const bits = [];
  if(b.on_ac && b.vbus_v > 0.5) bits.push(`Charger input ${b.vbus_v.toFixed(1)} V, ${b.vbus_a.toFixed(2)} A, ${b.vbus_w.toFixed(1)} W.`);
  if(b.capacity_mah != null) bits.push(`About ${b.capacity_mah.toLocaleString()} mAh remaining.`);
  $("bdInfo").hidden = !bits.length;
  $("bdInfo").querySelector("span").textContent = bits.join(" ");
}
function openBattDlg(){ $("battDlg").showModal(); paintBattDlg(); pollBattery(); }
$("batt").onclick = openBattDlg;
$("batt").onkeydown = e => { if(e.key === "Enter" || e.key === " "){ e.preventDefault(); openBattDlg(); } };
$("bdClose").onclick = () => $("battDlg").close();
$("battDlg").addEventListener("click", e => { if(e.target === $("battDlg")) $("battDlg").close(); });
async function pollBattery(){
  try{ const b = await (await fetch("/api/battery")).json(); setBattery(b); paintPower(b); }
  catch(e){ setBattery(null); paintPower(null); }
}

/* ---------------- minimize ---------------- */
```

```
/* The kiosk window has no title bar to tap, so the page shrinks into a badge
   and then asks gg_web to minimize the window (labwc + wlrctl). The desktop is
   then free for settings; the Garbage-Guard icon or the taskbar brings the
   window back, and the badge springs open into the full dashboard again.
   Away from the Pi (or without the helper) the badge just stays in the page. */
$("bubLogo").innerHTML = document.querySelector("#brand .logo").innerHTML;
function paintBubble(){
  const bub = $("bub"), s = last || {};
  const p = batt && batt.ok ? Math.round(batt.percent) : 0;
  bub.style.setProperty("--p", p);
  bub.style.setProperty("--ring", p <= 20 ? "var(--bad)" : p <= 40 ? "var(--warn)" : "var(--ok)");
  bub.classList.toggle("alert", !!s.alert_active && !s.muted);
  bub.classList.toggle("off", s.connected === false);
  bub.classList.toggle("charging", !!(batt && batt.charging));
}
let hidWindow = false;
function setMini(on){
  document.body.classList.toggle("mini", on);
  if(on && fsOn) closeFs();
  paintBubble();
  if(!on){ hidWindow = false; return; }
  setTimeout(async () => {
    if(!document.body.classList.contains("mini")) return;
    try{
      const j = await post("/api/window", {mode: "mini"});
      if(j.ok) hidWindow = true;
      else if(j.error !== "local_only") toast("Could not minimize the window", "i-warn");
    }catch(e){}
  }, 700);
}
$("miniBtn").onclick = () => setMini(true);
$("bub").onclick = () => setMini(false);
/* Window brought back from the taskbar or the icon: open the dashboard up. */
function backFromDesktop(){
  if(hidWindow && document.visibilityState === "visible" &&
     document.body.classList.contains("mini")) setTimeout(() => setMini(false), 150);
}
document.addEventListener("visibilitychange", backFromDesktop);
window.addEventListener("focus", backFromDesktop);

pollBattery();
setInterval(pollBattery, 2000);

/* ---------------- screen saver, power card, shutdown banner ---------------- */
const KIOSK = ["localhost", "127.0.0.1", "[::1]"].includes(location.hostname);
let lastTouch = 0, waking = false;
function showTop(el){ el.hidden = false; try{ if(el.showPopover && !el.matches(":popover-open"))
el.showPopover(); }catch(e){} }
function hideTop(el){ try{ if(el.hidePopover && el.matches(":popover-open")) el.hidePopover(); }catch(e){}
el.hidden = true; }

function paintScreen(s){
  fillPower(s);
  fillBuzzer(s);
  fillView(s);
  fillModel(s);
  fillClean(s);
  if(!KIOSK || waking) return;
  const sv = $("saver");
  if(s.screen === "dim" || s.screen === "off"){
    const a = s.screen === "off" ? 1 : 1 - (s.screen_dim_pct || 20) / 100;
    sv.style.background = `rgba(0,0,0,${a})`;
    if(!saverUp){
      saverUp = true;
      if(fsOn) closeFs();
      document.querySelectorAll("dialog[open]").forEach(d => d.close());
      showTop(sv);
    }
  }else if(saverUp){
    saverUp = false; hideTop(sv); pullFrame();
  }
}
function sendTouch(force){
  if(!KIOSK || document.visibilityState === "hidden") return;
  const now = Date.now();
  if(!force && now - lastTouch < 15000) return;
  lastTouch = now;
  fetch("/api/screen/touch", {method: "POST"}).catch(() => {});
}
document.addEventListener("pointerdown", () => { if(!saverUp) sendTouch(false); }, true);
$("saver").addEventListener("pointerdown", e => {
```

```
  e.preventDefault(); e.stopPropagation();
  waking = true;
  $("saver").style.background = "rgba(0,0,0,0)";
  sendTouch(true);
  setTimeout(() => { waking = false; saverUp = false; hideTop($("saver")); pullFrame(); refresh(); }, 450);
});
["click", "pointerup", "touchstart", "touchend", "contextmenu"].forEach(t =>
  $("saver").addEventListener(t, e => { e.preventDefault(); e.stopPropagation(); }));

let pwrDirty = false;
const mmss = n => Math.floor(n / 60) + ":" + String(n % 60).padStart(2, "0");
function setSw(el, on){ el.setAttribute("aria-checked", on ? "true" : "false"); }
function pickMode(m){
  document.querySelectorAll("#scrMode button").forEach(b => b.setAttribute("aria-pressed", b.dataset.mode === m ? "true" : "false"));
  $("scrDimRow").style.display = m === "dim" ? "" : "none";
}
function fillPower(s){
  const note = $("scrNote");
  note.hidden = !s.screen_note;
  if(s.screen_note) note.querySelector("span").textContent = s.screen_note;
  if(pwrDirty || s.screen_mode == null) return;
  pickMode(s.screen_mode);
  $("scrMin").value = Math.round(s.screen_timeout_s / 60);
  $("scrBat").value = s.screen_timeout_battery_s;
  $("scrDim").value = s.screen_dim_pct;
  setSw($("scrWake"), s.screen_wake_on_alert);
}
function fillShutdown(b){
  if(pwrDirty || !b || b.auto_shutdown == null) return;
  setSw($("shutSw"), b.auto_shutdown);
  $("shutPct").value = b.auto_shutdown_pct;
}
const pad2 = n => String(n).padStart(2, "0");
const hm12 = hm => { const [h, m] = hm.split(":").map(Number); return t12(h, m); };
function setTime(el, hm){ el.dataset.hm = hm; el.value = hm12(hm); }
function stepTime(el, d){
  const [h, m] = (el.dataset.hm || "00:00").split(":").map(Number);
  const n = (((h * 60 + m + d) % 1440) + 1440) % 1440;
  setTime(el, pad2(Math.floor(n / 60)) + ":" + pad2(n % 60));
}
const swOn = el => el.getAttribute("aria-checked") === "true";
function pickVol(v){
  document.querySelectorAll("#bzVol button").forEach(b => b.setAttribute("aria-pressed", b.dataset.vol === v ? "true" : "false"));
}
let buzzUi = false;
function fillBuzzer(s){
  const card = $("sndCard");
  setBuzzWait(s.buzzer_on == null);
  if(card.classList.contains("wait")) return;
  buzzUi = !!s.buzzer_ui && !!s.buzzer_available;
  const note = $("bzNote");
  note.hidden = s.buzzer_available !== false;
  if(!note.hidden) note.querySelector("span").textContent = "The buzzer is not available: " + (s.buzzer_note || "no reason given") + ".";
  const q = $("bzQuietNote");
  const qText = s.quiet_note || (s.quiet_now ? "Quiet hours are on now, so the buzzer is silent." : "");
  q.hidden = !qText;
  q.querySelector("span").textContent = qText;
  if(pwrDirty) return;
  setSw($("bzOn"), s.buzzer_on); pickVol(s.buzzer_volume);
  setSw($("bzAlerts"), s.buzzer_alerts); setSw($("bzCount"), s.buzzer_countdown);
  setSw($("bzUi"), s.buzzer_ui); setSw($("bzRep"), s.buzzer_repeat);
  $("bzRepS").value = s.buzzer_repeat_s; setSw($("bzQuiet"), s.quiet_on);
  setTime($("bzFrom"), s.quiet_from); setTime($("bzTo"), s.quiet_to);
  showBuzzRows();
}
function setBuzzWait(wait){
  $("sndCard").classList.toggle("wait", wait);
  $("quietCard").classList.toggle("wait", wait);
  if(wait){ $("bzChip").classList.add("off"); $("bzChip").querySelector("span").textContent = "OFFLINE"; }
}
function showBuzzRows(){
  const chip = $("bzChip"), on = swOn($("bzOn"));
  chip.classList.toggle("off", !on);
  chip.querySelector("span").textContent = on ? "ON" : "OFF";
  $("bzRepRow").style.display = swOn($("bzRep")) ? "" : "none";
  // The hours stay on show with quiet hours off, greyed and locked, so the saved times can be read.
  const q = swOn($("bzQuiet"));
  ["bzFromRow", "bzToRow"].forEach(id => {
```

```
    $(id).classList.toggle("dim", !q);
    $(id).querySelectorAll("button").forEach(b => { b.disabled = !q; });
  });
}
document.querySelectorAll("#bzVol button").forEach(b => b.addEventListener("click", () => pickVol(b.dataset.vol)));
["bzOn", "bzAlerts", "bzCount", "bzUi", "bzRep", "bzQuiet"].forEach(id =>
  $(id).addEventListener("click", () => { setSw($(id), !swOn($(id))); showBuzzRows(); }));
async function buzzTest(sound){
  const j = await post("/api/buzzer/test", {sound});
  if(!j.ok) toast(j.message || "The buzzer could not play", "i-warn");
}
$("bzTestAlarm").onclick = () => buzzTest("accumulation");
$("bzTestTune").onclick = () => buzzTest("test");
function uiSound(t){
  if(t.dataset.snd) return t.dataset.snd;
  if(t.disabled || t.getAttribute("aria-disabled") === "true") return "denied";
  if(t.matches(".sw")) return t.getAttribute("aria-checked") === "true" ? "switch_off" : "switch_on";
  if(t.matches(".step")) return Number(t.dataset.d) > 0 ? "step_up" : "step_down";
  if(t.matches(".tsw button")) return t.dataset.t === "dark" ? "theme_dark" : "theme_light";
  if(t.matches(".tabs button")) return "tab";
  if(t.matches("div.seg button, .fbar button")) return "choice";
  if(t.matches(".logo")) return "logo";
  return "tap";
}
document.addEventListener("pointerdown", e => {
  if(!KIOSK || !buzzUi) return;
  if(e.target.closest("#overlay")) return;
  const t = e.target.closest("[data-snd], button, .sw, a, .logo");
  if(t && t.id === "apply" && !(editing && draft && draft.length >= 3)) return;
  if(t && t.id === "edit" && !(last && last.roi && last.roi.length)) return;
  if(t) return uiSnd(uiSound(t));
  if(e.target.matches("dialog[open]") || (e.target.closest("#zoom") && !e.target.closest(".zpic"))) uiSnd("back");
}, true);

$("settings").addEventListener("click", e => {
  if(e.target.closest(".step, .seg button, .sw")) pwrDirty = true;
});
$("settings").addEventListener("input", () => { pwrDirty = true; });
document.querySelectorAll("#scrMode button").forEach(b => b.addEventListener("click", () => pickMode(b.dataset.mode)));
[$("scrWake"), $("shutSw")].forEach(b => b.addEventListener("click", () => setSw(b, b.getAttribute("aria-checked") !== "true")));
$("pwrSave").onclick = async () => {
  const mode = (document.querySelector("#scrMode [aria-pressed=true]") || {dataset: {}}).dataset.mode || "off";
  await post("/api/screen_saver", {mode, timeout_s: Number($("scrMin").value) * 60,
    timeout_battery_s: Number($("scrBat").value), dim_pct: Number($("scrDim").value),
    wake_on_alert: $("scrWake").getAttribute("aria-checked") === "true"});
  await post("/api/auto_shutdown", {on: $("shutSw").getAttribute("aria-checked") === "true", pct: Number($("shutPct").value)});
  if(!$("sndCard").classList.contains("wait")){
    const vol = (document.querySelector("#bzVol [aria-pressed=true]") || {dataset: {}}).dataset.vol;
    await post("/api/buzzer", {on: swOn($("bzOn")), volume: vol, alerts: swOn($("bzAlerts")),
      countdown: swOn($("bzCount")), ui: swOn($("bzUi")), repeat: swOn($("bzRep")),
      repeat_s: Number($("bzRepS").value), quiet_on: swOn($("bzQuiet")),
      quiet_from: $("bzFrom").dataset.hm, quiet_to: $("bzTo").dataset.hm});
  }
  if(!$("camCard").classList.contains("wait")){
    const st = (document.querySelector("#camStream [aria-pressed=true]") || {dataset: {}}).dataset.stream;
    const sz = (document.querySelector("#camSize [aria-pressed=true]") || {dataset: {}}).dataset.size;
    const cur = last || {};
    if(st && sz && (st !== (cur.stream_wanted || cur.stream) || Number(sz) !== cur.detect_size))
      await post("/api/view", {stream: st, detect_size: Number(sz)});
  }
  if(!$("camCard").classList.contains("wait") && last && last.labels){
    const want = pickedLabels();
    if(LBL.some(k => want[k] !== !!last.labels[k])){
      const j = await post("/api/labels", want);
      if(j && j.ok === false) toast(j.error || "Box labels could not be saved", "i-warn");
    }
  }
  pwrDirty = false; toast("Settings saved", "i-save"); refresh(); pollBattery();
};
function pickView(attr, v){
  document.querySelectorAll(`#cam${attr === "stream" ? "Stream" : "Size"} button`).forEach(b =>
    b.setAttribute("aria-pressed", b.dataset[attr] === String(v) ? "true" : "false"));
}
/* Box labels: any mix of ID, class and confidence, always in that order.
   None leaves the colored outline, and the color bar under the feed is the
```

```
   legend for it. The Pi draws the boxes, so the app shows the same labels. */
const LBL = ["id", "class", "conf"];
function pickedLabels(){
  const out = {};
  document.querySelectorAll("#lblPick button").forEach(b => { out[b.dataset.lbl] = b.getAttribute("aria-pressed") === "true"; });
  return out;
}
function paintLabels(l){
  document.querySelectorAll("#lblPick button").forEach(b =>
    b.setAttribute("aria-pressed", l[b.dataset.lbl] ? "true" : "false"));
  const text = [l.id && "#53", l.class && "food_container", l.conf && "50%"].filter(Boolean).join(" ");
  $("lblNow").querySelector("span").textContent = text ? `Boxes read "${text}"` : "Outline only, color shows the class";
}
document.querySelectorAll("#lblPick button").forEach(b => b.addEventListener("click", () => {
  b.setAttribute("aria-pressed", b.getAttribute("aria-pressed") === "true" ? "false" : "true");
  paintLabels(pickedLabels());
}));
function fillView(s){
  const card = $("camCard");
  card.classList.toggle("wait", s.stream == null);
  if(s.stream == null) return;
  const chip = $("camChip");
  chip.querySelector("span").textContent = s.stream === "main" ? "MAIN" : "SUB";
  chip.classList.toggle("off", !!s.stream_note);
  $("camNow").querySelector("span").textContent = s.frame_size
    ? `Now ${s.frame_size.replace("x", "×")}, ${s.detect_box ? "area only" : "whole picture"}`
    : "Waiting for the camera";
  const note = $("camNote");
  note.hidden = !s.stream_note;
  note.querySelector("span").textContent = s.stream_note || "";
  $("lblPick").closest(".pfield").hidden = $("lblNow").hidden = !s.labels;
  if(pwrDirty) return;
  if(s.labels) paintLabels(s.labels);
  pickView("stream", s.stream_wanted || s.stream);
  pickView("size", s.detect_size);
}
/* Model card. A new model reaches the Pi as a .zip of the NCNN export folder,
   sent raw to POST /api/model/upload. On the Pi's own screen a model copied by
   USB stick can be picked as a folder instead: the three files the Pi keeps are
   packed into a zip here and sent the same way. */
// zip-writer-start
const CRC_TABLE = (() => {
  const t = new Uint32Array(256);
  for(let n = 0; n < 256; n++){
    let c = n;
    for(let k = 0; k < 8; k++) c = c & 1 ? 0xEDB88320 ^ (c >>> 1) : c >>> 1;
    t[n] = c >>> 0;
  }
  return t;
})();
function crc32(d){
  let c = 0xFFFFFFFF;
  for(let i = 0; i < d.length; i++) c = CRC_TABLE[(c ^ d[i]) & 255] ^ (c >>> 8);
  return (c ^ 0xFFFFFFFF) >>> 0;
}
/* files: [{name, data: Uint8Array}]. Store only (no compression), UTF-8 names. */
function storeZip(files){
  const enc = new TextEncoder(), parts = [], central = [];
  const now = new Date();
  const time = (now.getHours() << 11) | (now.getMinutes() << 5) | (now.getSeconds() >> 1);
  const date = ((now.getFullYear() - 1980) << 9) | ((now.getMonth() + 1) << 5) | now.getDate();
  let offset = 0;
  for(const f of files){
    const name = enc.encode(f.name), data = f.data, crc = crc32(data);
    const loc = new DataView(new ArrayBuffer(30));
    loc.setUint32(0, 0x04034b50, true); loc.setUint16(4, 20, true); loc.setUint16(6, 0x0800, true);
    loc.setUint16(8, 0, true); loc.setUint16(10, time, true); loc.setUint16(12, date, true);
    loc.setUint32(14, crc, true); loc.setUint32(18, data.length, true); loc.setUint32(22, data.length, true);
    loc.setUint16(26, name.length, true); loc.setUint16(28, 0, true);
    parts.push(new Uint8Array(loc.buffer), name, data);
    const cen = new DataView(new ArrayBuffer(46));
    cen.setUint32(0, 0x02014b50, true); cen.setUint16(4, 20, true); cen.setUint16(6, 20, true);
    cen.setUint16(8, 0x0800, true); cen.setUint16(10, 0, true); cen.setUint16(12, time, true);
    cen.setUint16(14, date, true); cen.setUint32(16, crc, true); cen.setUint32(20, data.length, true);
    cen.setUint32(24, data.length, true); cen.setUint16(28, name.length, true);
    cen.setUint32(42, offset, true);
    central.push(new Uint8Array(cen.buffer), name);
    offset += 30 + name.length + data.length;
```

```
  }
  const size = central.reduce((n, a) => n + a.length, 0);
  const end = new DataView(new ArrayBuffer(22));
  end.setUint32(0, 0x06054b50, true); end.setUint16(8, files.length, true);
  end.setUint16(10, files.length, true); end.setUint32(12, size, true); end.setUint32(16, offset, true);
  const all = [...parts, ...central, new Uint8Array(end.buffer)];
  const out = new Uint8Array(all.reduce((n, a) => n + a.length, 0));
  let at = 0;
  for(const a of all){ out.set(a, at); at += a.length; }
  return out;
}
// zip-writer-end
const MDL_MAX = 64 * 1024 * 1024;
let mdlBlob = null, mdlSending = false, mdlWait = null;
function mdlVersion(raw){
  const t = String(raw || "").trim();
  if(!/^[A-Za-z0-9._-]{1,24}$/.test(t) || t === "." || t === "..") return null;
  return /^[0-9]/.test(t) ? "v" + t : t;
}
function mdlGuess(name){
  const m = String(name || "").match(/garbageguard_([A-Za-z0-9.-]+?)(?:_best)?_ncnn_model/);
  if(m && !$("mdlVer").value.trim()) $("mdlVer").value = m[1];
}
function mdlSay(id, text, kind, icon){
  const el = $(id);
  el.hidden = !text;
  el.classList.toggle("bad", kind === "bad");
  el.classList.toggle("good", kind === "good");
  if(icon) el.querySelector("use").setAttribute("href", "#" + icon);
  el.querySelector("span").textContent = text || "";
}
function mdlBar(frac){
  const bar = $("mdlBar");
  bar.hidden = frac == null;
  bar.classList.toggle("busy", frac === "busy");
  bar.querySelector("i").style.width = typeof frac === "number" ? Math.round(frac * 100) + "%" : "";
}
function mdlProblem(){
  const s = last || {};
  if(!mdlBlob) return "Choose a .zip or a folder first.";
  const ver = mdlVersion($("mdlVer").value);
  if(!ver) return "Type a version name: letters, digits, dot, dash or underscore, up to 24.";
  if((s.models || []).some(m => m.label === ver)) return `${ver} is already on the Pi. Pick another name.`;
  if(mdlBlob.size > MDL_MAX) return "The model is over 64 MB, the Pi takes at most 64 MB.";
  return null;
}
function mdlButtons(){
  const s = last || {};
  const busy = mdlSending || !!s.model_loading;
  $("mdlUp").disabled = busy || !!mdlProblem();
  $("mdlZipBtn").disabled = $("mdlDirBtn").disabled = $("mdlVer").disabled = mdlSending;
  $("mdlBack").disabled = busy;
}
function mdlChosen(blob, text){
  mdlBlob = blob;
  mdlSay("mdlFile", text, blob ? "" : "bad", blob ? "i-box" : "i-warn");
  mdlSay("mdlState", "");
  mdlBar(null);
  mdlButtons();
}
$("mdlZipBtn").onclick = () => { $("mdlZip").value = ""; $("mdlZip").click(); };
$("mdlDirBtn").onclick = () => { $("mdlDir").value = ""; $("mdlDir").click(); };
$("mdlVer").addEventListener("input", mdlButtons);
$("mdlZip").onchange = () => {
  const f = $("mdlZip").files[0];
  if(!f) return;
  if(!/\.zip$/i.test(f.name)) return mdlChosen(null, `${f.name} is not a .zip.`);
  mdlGuess(f.name);
  mdlChosen(f, `${f.name}, ${(f.size / 1048576).toFixed(1)} MB`);
};
$("mdlDir").onchange = async () => {
  const all = [...$("mdlDir").files];
  if(!all.length) return;
  const top = (all[0].webkitRelativePath || all[0].name).split("/")[0];
  // Only files directly inside the picked folder count, like the Pi reads a zip.
  const inside = all.filter(f => (f.webkitRelativePath || f.name).split("/").length <= 2);
  const kinds = {param: inside.filter(f => /\.param$/i.test(f.name)),
                 bin: inside.filter(f => /\.bin$/i.test(f.name)),
                 meta: inside.filter(f => f.name === "metadata.yaml")};
  const missing = [];
  if(kinds.param.length !== 1) missing.push(kinds.param.length ? "has more than one .param file" : "has
```

```
no .param file");
  if(kinds.bin.length !== 1) missing.push(kinds.bin.length ? "has more than one .bin file" : "has no .bin file");
  if(kinds.meta.length !== 1) missing.push("has no metadata.yaml");
  if(missing.length) return mdlChosen(null, `The folder ${top} ${missing.join(", ")}. Pick the *_ncnn_model folder from yolo export.`);
  const picked = [kinds.param[0], kinds.bin[0], kinds.meta[0]];
  const size = picked.reduce((n, f) => n + f.size, 0);
  if(size > MDL_MAX) return mdlChosen(null, "The model files are over 64 MB, the Pi takes at most 64 MB.");
  mdlChosen(null, `Packing ${top}…`);
  try{
    const files = await Promise.all(picked.map(async f =>
      ({name: `${top}/${f.name}`, data: new Uint8Array(await f.arrayBuffer())})));
    mdlGuess(top);
    mdlChosen(new Blob([storeZip(files)], {type: "application/zip"}),
              `Folder ${top}, ${(size / 1048576).toFixed(1)} MB`);
  }catch(e){
    mdlChosen(null, `The folder could not be read: ${e.message || e}`);
  }
};
$("mdlUp").onclick = () => {
  const problem = mdlProblem();
  if(problem) return toast(problem, "i-warn");
  const ver = mdlVersion($("mdlVer").value);
  const x = new XMLHttpRequest();
  x.open("POST", "/api/model/upload?version=" + encodeURIComponent(ver));
  x.setRequestHeader("Content-Type", "application/zip");
  x.upload.onprogress = e => {
    if(!e.lengthComputable) return;
    mdlBar(e.loaded / e.total);
    mdlSay("mdlState", `Uploading ${ver}: ${Math.round(e.loaded / e.total * 100)}%`, "", "i-up");
  };
  x.onload = () => {
    mdlSending = false;
    let j = {};
    try{ j = JSON.parse(x.responseText); }catch(e){}
    if(x.status === 200 && j.ok){
      mdlWait = j.installed || null;
      mdlBlob = null; $("mdlVer").value = "";
      mdlSay("mdlFile", "No model chosen", "", "i-box");
      mdlBar("busy");
      mdlSay("mdlState", `Loading ${ver}…`, "", "i-refresh");
      refresh();
    }else{
      mdlBar(null);
      mdlSay("mdlState", j.message || j.error || `The Pi refused the upload (HTTP ${x.status}).`, "bad", "i-warn");
      uiSnd("denied");
    }
    mdlButtons();
  };
  x.onerror = x.onabort = () => {
    mdlSending = false; mdlBar(null);
    mdlSay("mdlState", "The upload was cut off. Check the link to the Pi and try again.", "bad", "i-warn");
    mdlButtons();
  };
  mdlSending = true;
  mdlBar(0);
  mdlSay("mdlState", `Uploading ${ver}: 0%`, "", "i-up");
  mdlButtons();
  x.send(mdlBlob);
};
$("mdlBack").onclick = async () => {
  const s = last || {};
  if(!s.model_prev) return;
  const j = await post("/api/model", {model: s.model_prev});
  if(j && j.ok === false) return toast(j.error || "That model could not be chosen", "i-warn");
  mdlWait = s.model_prev;
  mdlBar("busy");
  mdlSay("mdlState", `Loading ${s.model_prev_label || s.model_prev}…`, "", "i-refresh");
  refresh();
};
function fillModel(s){
  const card = $("mdlCard");
  card.classList.toggle("wait", !s.model);
  if(!s.model) return;
  const label = s.model_label || s.model;
  const wanted = (s.models || []).find(m => m.name === s.model_wanted);
  $("mdlBig").textContent = label;
  $("mdlChip").querySelector("span").textContent = s.model_loading ? "LOADING" : label.toUpperCase();
  $("mdlNow").textContent = s.model_loading && wanted && wanted.name !== s.model
```

```
    ? `Now running. Loading ${wanted.label}…` : "Now running";
  mdlSay("mdlNote", s.model_note || "", "bad");
  $("mdlChip").classList.toggle("off", !!s.model_note);
  const back = $("mdlBack");
  back.hidden = !s.model_prev || s.model_prev === s.model;
  back.querySelector("span").textContent = `Go back to ${s.model_prev_label || s.model_prev}`;
  if(mdlWait && !mdlSending){
    if(s.model_loading){
      mdlBar("busy");
      mdlSay("mdlState", `Loading ${wanted ? wanted.label : "the model"}…`, "", "i-refresh");
    }else{
      const ok = s.model === mdlWait;
      const name = ok ? label : (mdlWait.match(/^garbageguard_(.+?)(?:_best)?_ncnn_model$/) || [0,
mdlWait])[1];
      mdlBar(null);
      mdlSay("mdlState", ok ? `Now running ${name}.` : `${name} could not be loaded. The note above says
why.`,
             ok ? "good" : "bad", ok ? "i-check" : "i-warn");
      toast(ok ? `Now running ${name}` : `${name} could not be loaded`, ok ? "i-check" : "i-warn");
      mdlWait = null;
    }
  }
  mdlButtons();
}
document.querySelectorAll("#camStream button").forEach(b => b.addEventListener("click", () =>
pickView("stream", b.dataset.stream")));
document.querySelectorAll("#camSize button").forEach(b => b.addEventListener("click", () => pickView("size",
b.dataset.size")));
$("scrSleep").onclick = async () => { await post("/api/screen", {action: "sleep"}); refresh(); };

let pwrEnd = 0, pwrFloor = false;
function paintPower(b){
  fillShutdown(b);
  const pc = $("powChip");
  pc.hidden = !(b && b.ok);
  if(b && b.ok){
    const p = Math.round(b.percent);
    pc.querySelector("span").textContent = (b.on_ac ? "AC · " : "BATTERY ") + p + "%";
    pc.classList.toggle("off", !b.on_ac && p <= 20);
  }
  const cells = b && b.ok && Array.isArray(b.cells_v) ? b.cells_v : null;
  $("cellBox").hidden = !cells;
  if(cells){
    const lo = Math.min(...cells);
    $("cells").innerHTML = cells.map(v =>
      `<span class="${v === lo && Math.max(...cells) - lo > 0.05 ? "lo" :
""}"><b>${v.toFixed(2)}</b><small>V</small></span>`).join("");
  }
  const m = b && b.ok ? b.minutes_left : null;
  $("packRow").hidden = m == null;
  if(m != null){
    $("packLbl").textContent = b.charging ? "Full in" : "Time left";
    $("packVal").textContent = m >= 60 ? `${Math.floor(m / 60)} h ${m % 60} m` : `${m} m`;
  }
  const counting = !!b && b.shutdown_state === "counting" && b.shutdown_in_s != null;
  if(counting){
    pwrEnd = Date.now() + b.shutdown_in_s * 1000;
    pwrFloor = !!b.shutdown_floor;
    showTop($("pwrBanner"));
    tickPower();
  }else{
    pwrEnd = 0; hideTop($("pwrBanner"));
  }
}
function tickPower(){
  if(!pwrEnd) return;
  const n = Math.max(0, Math.round((pwrEnd - Date.now()) / 1000));
  $("pbHead").textContent = (pwrFloor ? "Battery almost empty. Shutting down in " : "Low battery. Shutting
down in ") + mmss(n);
  $("pbSub").textContent = pwrFloor ? "This cannot be cancelled. Plug in the charger now to stop it."
                                    : "Plug in the charger or tap Cancel.";
  $("pbCancel").hidden = pwrFloor;
  $("pwrBanner").classList.toggle("floor", pwrFloor);
}
setInterval(tickPower, 500);
$("pwrOff").onclick = () => $("offDlg").showModal();
$("offNo").onclick = () => $("offDlg").close();
$("offYes").onclick = async () => {
  $("offYes").disabled = $("offNo").disabled = true;
  $("offHead").textContent = "Shutting down";
  $("offText").textContent = "Saving the history, then powering off. This takes up to a minute. When the
```

```
    screen goes dark, it is safe to switch off the UPS HAT.";
3804   const j = await post("/api/shutdown", {confirm: true});
3805   if(!j.ok){
3806     $("offDlg").close();
3807     $("offYes").disabled = $("offNo").disabled = false;
3808     $("offHead").textContent = "Shut down the Pi?";
3809     toast(j.message || "The Pi would not shut down", "i-warn");
3810   }
3811 };
3812 $("pbCancel").onclick = async () => {
3813   const j = await post("/api/auto_shutdown", {cancel: true});
3814   toast(j.ok ? "Auto shutdown paused until the charger is plugged in" : (j.message || "Cannot cancel"),
    j.ok ? "i-ok" : "i-warn");
3815   pollBattery();
3816 };
3817
3818
3819 /* ---------------- camera refresh / restart ---------------- */
3820 const rf = $("rfBtn"), HOLD_MS = 5000, TAP_MS = 450;
3821 let rfDown = 0, rfTimer = null, rfTick = null, rfWaitUntil = 0, rfHint = "";
3822 function rfWaiting(){ return Date.now() < rfWaitUntil; }
3823 function noteCamera(s){
3824   if(rfWaitUntil && s.connected){
3825     rfWaitUntil = 0; rf.classList.remove("wait");
3826     toast("Camera back online", "i-signal");
3827   } else if(rfWaitUntil && !rfWaiting()){
3828     rfWaitUntil = 0; rf.classList.remove("wait");
3829     toast("Camera still not answering. Check its cable and power.", "i-warn");
3830   }
3831 }
3832 function retrigger(cls){ rf.classList.remove(cls); void rf.offsetWidth; rf.classList.add(cls); }
3833 async function reconnectCamera(){
3834   retrigger("tap");
3835   setTimeout(() => rf.classList.remove("tap"), 800);
3836   rfWaitUntil = Date.now() + 25000;
3837   setTimeout(() => { if(rfWaiting()) rf.classList.add("wait"); }, 750);
3838   toast("Reconnecting camera", "i-refresh");
3839   try{ await post("/api/camera/reconnect"); }catch(e){ toast("No link to Pi", "i-nolink"); }
3840   refresh();
3841 }
3842 function holdTip(left){
3843   const h = $("roihelp");
3844   if(left == null){
3845     if(rfHint){ h.lastChild.textContent = rfHint; rfHint = ""; }
3846     h.classList.remove("holdtip"); return;
3847   }
3848   if(!rfHint) rfHint = h.lastChild.textContent;
3849   h.classList.add("holdtip");
3850   h.lastChild.textContent = `Keep holding to restart Garbage-Guard · ${left}`;
3851 }
3852 function rfStart(e){
3853   if(e.button > 0 || rfDown || $("reboot").classList.contains("on")) return;
3854   e.preventDefault();
3855   try{ rf.setPointerCapture(e.pointerId); }catch(_){}
3856   rfDown = Date.now();
3857   rfTimer = setTimeout(() => {
3858     rf.classList.add("hold");
3859     holdTip(Math.ceil((HOLD_MS - (Date.now() - rfDown)) / 1000));
3860     rfTick = setInterval(() => holdTip(Math.max(1, Math.ceil((HOLD_MS - (Date.now() - rfDown)) / 1000))),
    200);
3861     rfTimer = setTimeout(rfFire, HOLD_MS - TAP_MS);
3862   }, TAP_MS);
3863 }
3864 function rfReset(){
3865   clearTimeout(rfTimer); clearInterval(rfTick); rfTimer = rfTick = null;
3866   rf.classList.remove("hold"); holdTip(null); rfDown = 0;
3867 }
3868 function rfEnd(e){
3869   if(!rfDown) return;
3870   const held = Date.now() - rfDown;
3871   const holding = rf.classList.contains("hold");
3872   rfReset();
3873   if(e.type === "pointercancel") return;
3874   if(held < TAP_MS) reconnectCamera();
3875   else if(holding) toast("Hold for 5 seconds to restart", "i-clock");
3876 }
3877 function rfFire(){
3878   clearInterval(rfTick); rfTick = null; holdTip(null);
3879   rf.classList.remove("hold"); retrigger("done"); rfDown = 0;
3880   restartAll();
3881 }
```

```
rf.addEventListener("pointerdown", rfStart);
rf.addEventListener("pointerup", rfEnd);
rf.addEventListener("pointercancel", rfEnd);
rf.addEventListener("contextmenu", e => e.preventDefault());
rf.addEventListener("keydown", e => { if(e.key === "Enter" || e.key === " "){ e.preventDefault();
reconnectCamera(); } });

async function restartAll(){
  const cover = $("reboot");
  if(fsOn) closeFs();
  document.querySelectorAll("dialog[open]").forEach(d => d.close());
  cover.classList.add("on");
  $("rbReload").hidden = true;
  const before = last ? last.uptime_s : null;
  try{ await post("/api/restart"); }
  catch(e){ $("rbMsg").textContent = "The Pi did not answer. It may already be restarting."; }
  const t0 = Date.now();
  let wentDown = false;
  const poll = setInterval(async () => {
    const secs = Math.round((Date.now() - t0) / 1000);
    if(secs > 20) $("rbReload").hidden = false;
    try{
      const s = await (await fetch("/api/state", {cache:"no-store"})).json();
      if(wentDown || (before != null && s.uptime_s < before) || s.uptime_s < secs + 3){
        clearInterval(poll); location.reload();
      }
    }catch(e){ wentDown = true; }
  }, 1000);
}
$("rbReload").onclick = () => location.reload();

/* Wi-Fi shortcut: shown only on the Pi's own screen, where setup is allowed. */
fetch("/api/net").then(r => r.json()).then(n => {
  if (n.local && n.has_wifi_hw) $("wifiBtn").hidden = false;
}).catch(() => {});
</script>
</body>
</html>
```

Listing K6. *AndroidManifest.xml: Permissions, Activities and Background Service (Android)*

```
<?xml version="1.0" encoding="utf-8"?>
<manifestxmlns:android="http://schemas.android.com/apk/res/android"
xmlns:tools="http://schemas.android.com/tools">

<uses-permissionandroid:name="android.permission.INTERNET"/>
<uses-permissionandroid:name="android.permission.ACCESS_NETWORK_STATE"/>
<uses-permissionandroid:name="android.permission.POST_NOTIFICATIONS"/>
<!-- The app's own vibration patterns for alerts, warnings and the link to the Pi. -->
<uses-permissionandroid:name="android.permission.VIBRATE"/>
<!-- Keeps polling the Pi for alerts while the app is closed. -->
<uses-permissionandroid:name="android.permission.FOREGROUND_SERVICE"/>
<uses-permissionandroid:name="android.permission.FOREGROUND_SERVICE_CONNECTED_DEVICE"/>
<uses-permissionandroid:name="android.permission.CHANGE_NETWORK_STATE"/>
<uses-permissionandroid:name="android.permission.REQUEST_IGNORE_BATTERY_OPTIMIZATIONS"/>

<!-- usesCleartextTraffic: the Pi serves plain HTTP on the local network. Without it every
         request to the Pi fails. -->
<application
android:allowBackup="true"
android:usesCleartextTraffic="true"
android:dataExtractionRules="@xml/data_extraction_rules"
android:fullBackupContent="@xml/backup_rules"
android:icon="@mipmap/ic_launcher"
android:label="@string/app_name"
android:roundIcon="@mipmap/ic_launcher_round"
android:supportsRtl="true"
android:theme="@style/Theme.GarbageGuard">
<activity
android:name=".MainActivity"
android:exported="true"
android:configChanges="orientation|screenSize|screenLayout|smallestScreenSize|keyboardHidden"
android:label="@string/app_name"
android:theme="@style/Theme.GarbageGuard"
android:windowSoftInputMode="adjustResize"/>
<!-- The home-screen entry. There are two, one per icon, and only one is
             switched on at a time: the light logo or the dark one, following the
             theme the app was last left in. MainActivity switches them. -->
<activity-alias
android:name=".LauncherLight"
```

```
android:enabled="true"
android:exported="true"
android:icon="@mipmap/ic_launcher"
android:roundIcon="@mipmap/ic_launcher_round"
android:label="@string/app_name"
android:targetActivity=".MainActivity">
<intent-filter>
<actionandroid:name="android.intent.action.MAIN"/>
<categoryandroid:name="android.intent.category.LAUNCHER"/>
</intent-filter>
</activity-alias>
<activity-alias
android:name=".LauncherDark"
android:enabled="false"
android:exported="true"
android:icon="@mipmap/ic_launcher_dark"
android:roundIcon="@mipmap/ic_launcher_dark_round"
android:label="@string/app_name"
android:targetActivity=".MainActivity">
<intent-filter>
<actionandroid:name="android.intent.action.MAIN"/>
<categoryandroid:name="android.intent.category.LAUNCHER"/>
</intent-filter>
</activity-alias>
<!-- The connectedDevice type must match the one WatchService passes to startForeground,
             or Android 14 and later refuse to start it. -->
<service
android:name=".notify.WatchService"
android:exported="false"
android:foregroundServiceType="connectedDevice"/>
<!-- Handles the 'Mute 15 min' button on alert notifications. -->
<receiver
android:name=".notify.MuteReceiver"
android:exported="false"/>
</application>

</manifest>
```

Listing K7. *GgRepository.kt: Interface Between the App Screens and the Pi (Android)*

```
package com.garbageguard.app.data

import kotlin.coroutines.coroutineContext
import kotlin.coroutines.CoroutineContext
import kotlin.coroutines.AbstractCoroutineContextElement
import kotlinx.coroutines.flow.MutableStateFlow
import kotlinx.coroutines.flow.StateFlow

/**
 * Everything the UI needs from the Pi. FakeRepository implements this with
 * invented data. Later a PiRepository will implement the same interface with
 * real HTTP calls, and only the line that creates the repository changes.
 *
 * Each function notes the endpoint it will call.
 */
/**
 * Rides along with the coroutine that sends a command. A repository marks it
 * when the Pi did not confirm, so the screen can tell a command that worked
 * from one that was lost, without every call having to return a result.
 */
// If a button seems to do nothing, check this flag first: failed = true means the command never
// reached the Pi.
classOutcome : AbstractCoroutineContextElement(Outcome) {
companionobjectKey : CoroutineContext.Key<Outcome>

@Volatile
varfailed = false
}

/** Marks the command now running as not confirmed. */
suspendfuncommandFailed() {
    coroutineContext[Outcome]?.failed = true
}

// Implemented by PiRepository (HTTP to the Pi on the same network), CloudRepository (Firebase) and
// FakeRepository (demo mode). The UI only talks to this interface.
interfaceGgRepository {
/** Polled from GET /api/state about once per second. */
valstate: StateFlow<LiveState>

```

```
/** From GET /api/alerts?limit=50, newest first. */
valalerts: StateFlow<List<AlertRow>>

/**
     * "total" from GET /api/alerts: the number of records in the whole log,
     * which can be more than the rows loaded. Null where the repository does
     * not know it; the screen then falls back to the state's alerts_total.
     */
valalertsTotal: StateFlow<Int?>get() = NO_TOTAL

/** Polled from GET /api/battery every two seconds. */
valbattery: StateFlow<Battery>

/** Address of GET /frame.jpg. Null when there is no camera picture, as with demo data. */
valframeUrl: String?get() = null

/** Address of GET /snapshots/<name>. Null when snapshots are not real images. */
funsnapshotUrl(name: String): String? = null

/** Times one GET /api/state. Returns latency in ms, or an error message. */
suspendfuntestConnection(address: String): Result<Long>

/** POST /api/mute {"seconds": n}. 0 means until unmuted. */
suspendfunmute(seconds: Int)

/** POST /api/mute {"cancel": true} */
suspendfununmute()

/** POST /api/auto_mute. Either field may be null. */
suspendfunsetAutoMute(on: Boolean?, seconds: Int?)

/** POST /api/settings {"conf": 40, "threshold": 20}. conf is a percentage. */
suspendfunsaveSettings(confPercent: Int, threshold: Int)

/** POST /api/roi. An empty list clears the area. */
suspendfunsetRoi(points: List<RoiPoint>)

/** POST /api/test_alert */
suspendfuntestAlert()

/** POST /api/capture */
suspendfuncapture()

/** POST /api/alerts/read with ids, or {"all": true} when ids is null. */
suspendfunmarkRead(ids: List<Long>?, read: Boolean)

/** POST /api/alerts/delete by ids. */
suspendfundeleteAlerts(ids: List<Long>)

/** POST /api/alerts/delete by date range, dates as yyyy-mm-dd. */
suspendfundeleteRange(from: String, to: String)

/** POST /api/alerts/delete {"all": true} */
suspendfundeleteAll()

/** POST /api/camera/reconnect. Watch the state's conn for the result. */
suspendfunreconnectCamera()

/** POST /api/restart. The Pi drops off for a few seconds, then comes back. */
suspendfunrestart()

/** GET /api/net/details. Null when the Pi does not answer or is too old to have it. */
suspendfunnetworkDetails(): NetDetails?

/** POST /api/screen_saver. Any value may be left null to keep it as it is. */
suspendfunsetScreenSaver(mode: String?, timeoutS: Int?, timeoutBatteryS: Int?, dimPct: Int?, wakeOnAlert:
Boolean?) {}

/** POST /api/screen with "wake" or "sleep". */
suspendfunscreen(action: String) {}

/** POST /api/auto_shutdown with the switch, the percentage, or both. */
suspendfunsetAutoShutdown(on: Boolean?, pct: Int?) {}

/** POST /api/auto_shutdown {"cancel": true}. False when the Pi refuses. */
suspendfuncancelShutdown(): Boolean = true

/** POST /api/shutdown {"confirm": true}. Powers the Pi off. */
suspendfunshutdown() {}

/** POST /api/buzzer with only the fields that changed, under the API's own names ("on", "volume",
```

```
    "quiet_from" ...). */
121 suspendfunsetBuzzer(changes: Map<String, Any>) {}
122
123 /** POST /api/buzzer/test {"sound": "accumulation"} or "test". */
124 suspendfuntestBuzzer(sound: String) {}
125
126 /** POST /api/clean {"mode": "off"|"manual"|"all"}. */
127 suspendfunsetClean(mode: String) {}
128
129 /** POST /api/labels {"class": bool, "id": bool, "conf": bool}: what the Pi writes on each box. */
130 suspendfunsetLabels(labels: BoxLabels) {}
131
132 /** Where the clean copy of a snapshot can be loaded. Null where it cannot, as over Firebase. */
133 funcleanUrl(name: String): String? = null
134
135 /**
136      * True where POST /api/model/upload can be reached: the Pi's own network,
137      * or demo data. Firebase has no upload, a model is too big for it.
138      */
139 valcanUploadModel: Booleanget() = false
140
141 /** POST /api/model {"model": name}: switch to a model already on the Pi, as "Go back" does. */
142 suspendfunsetModel(name: String) {
143         commandFailed()
144     }
145
146 /**
147      * POST /api/model/upload?version=<version> with the raw zip as the body.
148      * [size] is the exact length of what [open] gives. [progress] hears the
149      * bytes sent so far and the total.
150      */
151 suspendfunuploadModel(
152         version: String,
153         size: Long,
154         open: () -> java.io.InputStream,
155         progress: (Long, Long) ->Unit,
156     ): UploadReply = UploadReply(false, "Connect to the Pi's Wi-Fi to upload a model.")
157 }
158
159 privatevalNO_TOTAL: StateFlow<Int?> = MutableStateFlow(null)
```

Listing K8. *MonitorScreen.kt: Monitor Screen in Jetpack Compose (Android)*

```
 1 package com.garbageguard.app.ui.screens
 2
 3 import androidx.compose.animation.core.animateFloatAsState
 4 import androidx.compose.animation.core.tween
 5 import androidx.compose.foundation.background
 6 import androidx.compose.foundation.border
 7 import androidx.compose.foundation.clickable
 8 import androidx.compose.foundation.interaction.MutableInteractionSource
 9 import androidx.compose.foundation.layout.Arrangement
10 import androidx.compose.foundation.layout.Box
11 import androidx.compose.foundation.layout.Column
12 import androidx.compose.foundation.layout.Row
13 import androidx.compose.foundation.layout.defaultMinSize
14 import androidx.compose.foundation.layout.fillMaxSize
15 import androidx.compose.foundation.layout.fillMaxWidth
16 import androidx.compose.foundation.layout.height
17 import androidx.compose.foundation.layout.padding
18 import androidx.compose.foundation.layout.widthIn
19 import androidx.compose.foundation.layout.width
20 import androidx.compose.foundation.rememberScrollState
21 import androidx.compose.foundation.shape.CircleShape
22 import androidx.compose.foundation.shape.RoundedCornerShape
23 import androidx.compose.foundation.verticalScroll
24 import androidx.compose.material3.DropdownMenu
25 import androidx.compose.material3.DropdownMenuItem
26 import androidx.compose.runtime.CompositionLocalProvider
27 import androidx.compose.runtime.Composable
28 import androidx.compose.runtime.LaunchedEffect
29 import androidx.compose.runtime.getValue
30 import androidx.compose.runtime.collectAsState
31 import androidx.compose.runtime.mutableStateOf
32 import androidx.compose.runtime.remember
33 import androidx.compose.runtime.setValue
34 import androidx.compose.ui.Alignment
35 import androidx.compose.ui.Modifier
36 import androidx.compose.ui.draw.clip
37 import androidx.compose.ui.draw.drawBehind
```

```
import androidx.compose.ui.geometry.CornerRadius
import androidx.compose.ui.geometry.Offset
import androidx.compose.ui.geometry.Size
import androidx.compose.ui.graphics.Color
import androidx.compose.ui.graphics.vector.ImageVector
import androidx.compose.ui.text.font.FontWeight
import androidx.compose.ui.unit.dp
import com.garbageguard.app.notify.Sfx
import com.garbageguard.app.data.ConnState
import com.garbageguard.app.data.LiveState
import com.garbageguard.app.ui.AppViewModel
import com.garbageguard.app.ui.Overlay
import com.garbageguard.app.ui.components.AutoSwitch
import com.garbageguard.app.ui.components.BtnKind
import com.garbageguard.app.ui.components.FeedFrame
import com.garbageguard.app.ui.components.GgButton
import com.garbageguard.app.ui.components.GgCard
import com.garbageguard.app.ui.components.GgIcons
import com.garbageguard.app.ui.components.Hd
import com.garbageguard.app.ui.components.Hint
import com.garbageguard.app.ui.components.Ico
import com.garbageguard.app.ui.components.RollingText
import com.garbageguard.app.ui.components.Skeleton
import com.garbageguard.app.ui.components.Soft
import com.garbageguard.app.ui.components.LocalOnColour
import com.garbageguard.app.ui.components.T
import com.garbageguard.app.ui.components.TvFeed
import com.garbageguard.app.ui.components.breathe
import com.garbageguard.app.ui.components.neuRaised
import com.garbageguard.app.ui.components.neuShadow
import com.garbageguard.app.ui.components.neuWell
import com.garbageguard.app.ui.components.ring
import com.garbageguard.app.ui.components.pressable
import com.garbageguard.app.notify.Feel
import androidx.compose.ui.platform.LocalView
import com.garbageguard.app.ui.components.rememberLiveFrame
import com.garbageguard.app.ui.theme.Gg
import java.time.LocalTime
import java.time.format.DateTimeFormatter
import kotlin.math.roundToInt

enumclassLv { OK, WARN, BAD, GRAY }

dataclassLevel(vallv: Lv, vallabel: String, valicon: ImageVector)

// Uses the smoothed count, as the Pi does, so the bar and the Pi's alert always agree.
funpercentOf(s: LiveState): Int =
if (s.threshold>0) (s.smoothed * 100f / s.threshold).roundToInt() else0

/** Same thresholds and wording as level() in the mockup and the dashboard. */
funlevelOf(s: LiveState): Level {
valp = percentOf(s)
returnwhen {
        s.conn == ConnState.NO_PI -> Level(Lv.GRAY, "No link to Pi", GgIcons.NoLink)
        s.alertActive&& s.muted -> Level(Lv.WARN, "Alert muted", GgIcons.EyeOff)
        s.alertActive -> Level(Lv.BAD, "Alert raised", GgIcons.Bell)
        p >= 80 -> Level(Lv.BAD, "Near the limit", GgIcons.Warn)
        p >= 50 -> Level(Lv.WARN, "Building up", GgIcons.Up)
else -> Level(Lv.OK, "Normal", GgIcons.Ok)
    }
}

// Boxes are drawn only while the camera is online, so a stale picture never looks live.
funframeOf(s: LiveState) = FeedFrame(
    showBoxes = s.conn == ConnState.ONLINE,
    total = s.smoothed, bottle = s.bottle, bag = s.bag, container = s.foodContainer,
    roi = s.roi, outline = true,
)

funfpsLabel(s: LiveState) = if (s.conn == ConnState.ONLINE) "%.1f FPS".format(s.fps) else"-- FPS"

funmuteLeftLabel(seconds: Int?): String =
if (seconds == null || seconds <= 0) "no expiry"else"${seconds / 60}:${(seconds % 60).toString().padStart(2,
'0')} left"

valMUTE_CHOICES = listOf(300 to "5 min", 900 to "15 min", 1800 to "30 min", 3600 to "1 hr", 0 to "Always")

@Composable
funMonitorScreen(vm: AppViewModel, state: LiveState) {
    Column(
        Modifier
```

```
            .fillMaxSize()
            .verticalScroll(rememberScrollState())
            .padding(start = 12.dp, end = 12.dp, top = 4.dp, bottom = 14.dp),
        verticalArrangement = Arrangement.spacedBy(12.dp),
    ) {
// Grey placeholders until the first state arrives, so the layout does not jump.
if (vm.loading) {
            Skeleton(96.dp)
            Row(horizontalArrangement = Arrangement.spacedBy(8.dp)) {
                repeat(3) { Skeleton(60.dp, Modifier.weight(1f)) }
            }
            Skeleton(230.dp)
            Skeleton(52.dp)
return@Column
        }
        Hero(state)
        Counts(state)
        MuteBar(vm, state)
        PiScreenChip(vm, state)
        FeedCard(vm, state)
    }
}

/** .box.level */
@Composable
privatefunHero(s: LiveState) {
valc = Gg.colors
vallevel = levelOf(s)
valnoPi = s.conn == ConnState.NO_PI
valp = percentOf(s)
valfillby animateFloatAsState(if (noPi) 0felse (p.coerceAtMost(100)) / 100f, tween(550), label = "bar")
valbarColor = when (level.lv) { Lv.WARN -> c.warn; Lv.BAD -> c.bad; else -> c.ok }
valstateColor = when (level.lv) { Lv.WARN -> c.warnText; Lv.BAD -> c.bad; else -> c.text }
valbad = level.lv == Lv.BAD
valglow = if (bad) breathe(1500) else0f

varlastUpdateby remember { mutableStateOf("") }
// Remembers the time of the last good update, shown while the Pi is unreachable.
    LaunchedEffect(s) {
if (!noPi) lastUpdate = LocalTime.now().format(DateTimeFormatter.ofPattern("H:mm"))
    }

    Box(
        Modifier
            .fillMaxWidth()
            .drawBehind {
// @keyframes alarm: the border swells into a red tint ring.
if (bad) {
valg = 4.dp.toPx() * glow
valr = 14.dp.toPx() + g
                    drawRoundRect(
                        c.badTint.copy(alpha = glow), topLeft = Offset(-g, -g),
                        size = Size(size.width + 2 * g, size.height + 2 * g), cornerRadius = CornerRadius(r,
r),
                    )
                }
            }
            .neuRaised(c, 14.dp, edge = if (bad) c.badelse c.edge)
            .drawBehind {
if (level.lv != Lv.GRAY) {
                    drawRect(barColor.copy(alpha = 0.45f), size = Size(size.width * fill, size.height))
                }
            },
    ) {
        Column(Modifier.padding(horizontal = 12.dp, vertical = 9.dp), verticalArrangement =
Arrangement.spacedBy(2.dp)) {
            Row(verticalAlignment = Alignment.CenterVertically, horizontalArrangement =
Arrangement.spacedBy(4.dp)) {
                Ico(if (noPi) GgIcons.Clockelse GgIcons.Gauge, size = 12.dp, tint = c.muted)
                T(
if (noPi && s.piOfflineSince != null) "PI OFFLINE SINCE ${s.piOfflineSince}"elseif (noPi) "LAST UPDATE
$lastUpdate"else"$p% OF LIMIT",
                    size = 0.68f, color = c.muted, spacing = 0.06f,
                )
            }
            Row(verticalAlignment = Alignment.Bottom, horizontalArrangement = Arrangement.spacedBy(6.dp)) {
                RollingText(if (noPi) "–"else"${s.smoothed}", size = 2.2f, color = c.text, spacing = -
0.03f)
                T("OF ${s.threshold} ITEMS", Modifier.padding(bottom = 4.dp), size = 0.76f, color = c.muted,
spacing = 0.05f)
            }
```

```
            Row(verticalAlignment = Alignment.CenterVertically, horizontalArrangement = Arrangement.spacedBy(6.dp)) {
                Ico(level.icon, Modifier.ring(s.alertActive&& !s.muted&& !noPi), size = 14.dp, tint = stateColor)
                T(level.label.uppercase(), size = 0.8f, weight = FontWeight.Black, color = stateColor, spacing = 0.05f)
            }
        }
    }
}

privatedataclassClassCount(vallabel: String, valvalue: Int, valtint: Color, valicon: ImageVector)

/** .counts */
@Composable
privatefunCounts(s: LiveState) {
valc = Gg.colors
valnoPi = s.conn == ConnState.NO_PI
    Row(Modifier.fillMaxWidth(), horizontalArrangement = Arrangement.spacedBy(8.dp)) {
        listOf(
            ClassCount("Bottle", s.bottle, c.bottle, GgIcons.Bottle),
            ClassCount("Bag", s.bag, c.bag, GgIcons.Bag),
            ClassCount("Container", s.foodContainer, c.container, GgIcons.Container),
        ).forEach { (label, value, tint, icon) ->
            Column(
                Modifier
                    .weight(1f)
                    .neuRaised(c, 14.dp)
                    .padding(horizontal = 10.dp, vertical = 7.dp),
                verticalArrangement = Arrangement.spacedBy(1.dp),
            ) {
                Row(verticalAlignment = Alignment.CenterVertically, horizontalArrangement = Arrangement.spacedBy(4.dp)) {
                    Ico(icon, size = 13.dp, tint = tint)
                    T(label.uppercase(), size = 0.66f, color = c.muted, spacing = 0.05f, maxLines = 1)
                }
                RollingText(if (noPi) "–"else"$value", size = 1.5f, color = c.text)
            }
        }
    }
}

/**
 * The mute bar: one line, and the same size in every state. Status on the
 * left in two short lines, then the auto-mute key, the length picker, and
 * one button that is always there (Mute, Unmute or Retry). A timed mute
 * shows its countdown as a thin bar along the bottom edge, inside the card.
 */
@Composable
privatefunMuteBar(vm: AppViewModel, s: LiveState) {
valc = Gg.colors
valnoPi = s.conn == ConnState.NO_PI
validle = !s.alertActive&& !s.muted
// armed: auto-mute is on and nothing is ringing, so the next alert will be muted at once.
valarmed = s.autoMute&& idle

valfill = when {
        noPi -> c.badTint
        s.muted -> c.sunk
        armed -> c.tealTint
        idle -> c.base2
else -> c.warnTint
    }
valicon: ImageVector
valtint: Color
valtitle: String
valdetail: String
when {
        noPi -> { icon = GgIcons.NoLink; tint = c.bad; title = "NO LINK"; detail = "Check the network" }
        s.muted -> {
            icon = GgIcons.EyeOff; tint = c.muted
            title = if (s.autoMuted) "AUTO-MUTED"else"MUTED"
            detail = muteLeftLabel(s.muteLeft)
        }
        armed -> { icon = GgIcons.BellAuto; tint = c.teal; title = "ARMED"; detail = "Mutes next alert" }
        idle -> { icon = GgIcons.Bell; tint = c.muted; title = "NO ALERT"; detail = "Nothing to mute" }
else -> { icon = GgIcons.Bell; tint = c.bad; title = "ALERT"; detail = "Limit reached" }
    }
// A timed mute draws its countdown as a thin bar along the bottom edge; 'Always' has none.
valtimed = s.muted&& s.muteLeft != null&& s.muteTotal>0
valfracby animateFloatAsState(
```

```
if (timed) (s.muteLeft!!.toFloat() / s.muteTotal).coerceIn(0f, 1f) else0f, tween(900), label = "mute",
    )

    Row(
        Modifier
            .fillMaxWidth()
            .height(58.dp)
            .neuRaised(c, 14.dp, fillColor = fill)
            .drawBehind {
if (timed) {
valh = 4.dp.toPx()
                    drawRect(c.shade.copy(alpha = 0.5f), topLeft = Offset(0f, size.height - h), size =
Size(size.width, h))
                    drawRect(c.warn, topLeft = Offset(0f, size.height - h), size = Size(size.width * frac,
h))
                }
            }
            .padding(start = 10.dp, end = 8.dp),
        verticalAlignment = Alignment.CenterVertically,
        horizontalArrangement = Arrangement.spacedBy(7.dp),
    ) {
        Ico(icon, Modifier.ring(s.alertActive&& !s.muted&& !noPi), size = 18.dp, tint = tint)
        Column(Modifier.weight(1f), verticalArrangement = Arrangement.spacedBy(1.dp)) {
            T(title, size = 0.72f, weight = FontWeight.Black, color = if (tint == c.muted) c.textelse tint,
spacing = 0.03f, fit = true)
            T(detail, size = 0.64f, weight = FontWeight.Bold, color = c.muted, tnum = true, fit = true)
        }
// The bar is tinted in most of its states, so its keys keep only their hard shadow.
        CompositionLocalProvider(LocalOnColour provides (fill != c.base2)) {
if (noPi) {
            GgButton("Retry", vm::retry, Modifier.width(MUTE_KEY_WIDTH), icon = GgIcons.Refresh, small =
true)
        } else {
            AutoSwitch(s.autoMute, vm::toggleAutoMute, label = null, lock = "automute")
            MutePick(vm.muteChoice, vm::chooseMuteLength)
if (s.muted) {
                GgButton("Unmute", vm::unmute, Modifier.width(MUTE_KEY_WIDTH), icon = GgIcons.Bell, kind =
BtnKind.TEAL, small = true, lock = "mute")
            } else {
                GgButton(
"Mute", { vm.overlay = Overlay.Mute }, Modifier.width(MUTE_KEY_WIDTH),
                    icon = GgIcons.EyeOff, small = true, enabled = !idle, lock = "mute",
                )
            }
        }
        }
    }
}

privatevalMUTE_KEY_WIDTH = 96.dp

/** The mute length selector, a fixed-width well so the bar never shifts. */
@Composable
funMutePick(seconds: Int, onPick: (Int) ->Unit) {
valc = Gg.colors
varopenby remember { mutableStateOf(false) }
valview = LocalView.current
vallabel = MUTE_CHOICES.firstOrNull { it.first == seconds }?.second ?: "15 min"
    Box {
        Row(
            Modifier
                .width(78.dp)
                .height(36.dp)
                .neuWell(c, 9.dp)
                .pressable { open = true }
                .padding(horizontal = 7.dp),
            verticalAlignment = Alignment.CenterVertically,
            horizontalArrangement = Arrangement.spacedBy(4.dp),
        ) {
            Ico(GgIcons.Clock, size = 12.dp, tint = c.bag)
            T(label, Modifier.weight(1f), size = 0.72f, color = c.text, fit = true)
            T("\u25BE", size = 0.66f, color = c.muted)
        }
        DropdownMenu(
            expanded = open,
            onDismissRequest = { open = false },
            containerColor = c.raised,
            shape = RoundedCornerShape(12.dp),
            border = androidx.compose.foundation.BorderStroke(2.dp, c.edge),
        ) {
            MUTE_CHOICES.forEach { (value, text) ->
```

```
                DropdownMenuItem(
                    text = { T(text, size = 0.9f, color = if (value == seconds) c.tealelse c.text) },
                    onClick = {
                        Feel.play(view, Sfx.CHOICE)
                        open = false
                        onPick(value)
                    },
                )
            }
        }
    }
}
/**
 * The live feed. The whole card is the television: the picture fills it
 * edge to edge and the readouts and keys sit on the set's own control deck.
 */
@Composable
privatefunFeedCard(vm: AppViewModel, s: LiveState) {
valonline = s.conn == ConnState.ONLINE
valnoPi = s.conn == ConnState.NO_PI
valusageNowby vm.cloudUsage.collectAsState()
valnote = usageNow?.note
    TvFeed(
        frame = frameOf(s),
        online = online,
        noPi = noPi,
        fpsLabel = fpsLabel(s),
        latencyLabel = if (noPi) "-- MS"else"${s.latencyMs.roundToInt()} MS \u00B7 AVG
${s.avgLatencyMs.roundToInt()}",
        caption = when {
// The Pi's own words when it has slowed or stopped the remote picture to save the allowance.
            vm.remote&& note != null -> note
            vm.remote ->"A still every 3 seconds. Join the Pi's Wi-Fi for live video."
            s.roi.size>= 3 ->"Grey boxes fall outside the monitored area and are not counted."
else ->"Whole frame is monitored. Draw an area in Settings."
        },
        remote = vm.remote,
        showFlag = s.alertActive&& !s.muted&& online,
        onCapture = vm::capture,
        onReconnect = vm::reconnectCamera,
        reconnecting = vm.reconnecting,
        onFullscreen = vm::openFullscreen,
        image = rememberLiveFrame(vm.frameUrl),
    )
}
```

Listing K9. *Alerts.kt: Alert Notifications, Channels and Sounds (Android)*

```
package com.garbageguard.app.notify

import android.app.NotificationChannel
import android.app.NotificationManager
import android.app.PendingIntent
import android.content.Context
import android.content.Intent
import android.graphics.Bitmap
import android.graphics.BitmapFactory
import android.media.AudioAttributes
import android.net.Uri
import android.os.Build
import androidx.core.app.NotificationCompat
import androidx.core.app.NotificationManagerCompat
import com.garbageguard.app.MainActivity
import com.garbageguard.app.R
import com.garbageguard.app.data.AlertRow
import com.garbageguard.app.data.EventType
import kotlinx.coroutines.CoroutineScope
import kotlinx.coroutines.Dispatchers
import kotlinx.coroutines.launch
import kotlinx.coroutines.withContext
import java.net.HttpURLConnection
import java.net.URL

/**
 * Turns new history rows into Android notifications, each kind with its own
 * sound. On Android a notification's sound belongs to its channel, so every
 * kind of event has a channel. That is also what lets the right sound play
 * while the app is in the background or closed.
 */
objectAlerts {
```

```
constvalCHANNEL_WATCH = "gg_watch"
constvalACTION_MUTE = "com.garbageguard.app.MUTE_15"
constvalEXTRA_NOTIFICATION_ID = "notification_id"

/** How one kind of event is announced. */
privateclassKind(
valchannel: String,
valchannelName: String,
valabout: String,
valsound: Int,
valimportance: Int,
valtitle: String,
/** Raised by someone pressing a button, so on-screen it only needs a sound. */
valroutine: Boolean,
/** Its vibration, on the channel and while the app is open. */
valbuzz: Haptics.Buzz,
    )

// Channel ids carry a version suffix. To change a sound or vibration, bump the id and add the
// old one to RETIRED, otherwise phones keep the old setting.
privatevalkinds = mapOf(
        EventType.ACCUMULATION to Kind(
"gg_limit_v4", "Limit reached", "The accumulation limit was reached. Sounds a buzzer.",
            R.raw.gg_buzzer, NotificationManager.IMPORTANCE_HIGH, "Accumulation alert", routine = false,
buzz = Haptics.Buzz.ACCUMULATION,
        ),
        EventType.TEST to Kind(
"gg_test_v4", "Test alerts", "Someone pressed Test alert.",
            R.raw.gg_test, NotificationManager.IMPORTANCE_HIGH, "Test alert", routine = false, buzz =
Haptics.Buzz.TEST,
        ),
        EventType.AUTO_MUTED to Kind(
"gg_automute_v4", "Auto-muted alerts", "An alert was raised and auto-mute silenced it.",
            R.raw.gg_automute, NotificationManager.IMPORTANCE_DEFAULT, "Alert auto-muted", routine = false,
buzz = Haptics.Buzz.AUTO_MUTED,
        ),
        EventType.MANUAL to Kind(
"gg_capture_v4", "Captures", "A snapshot was captured from another screen.",
            R.raw.gg_capture, NotificationManager.IMPORTANCE_DEFAULT, "Snapshot captured", routine = true,
buzz = Haptics.Buzz.CAPTURE,
        ),
        EventType.MUTED to Kind(
"gg_mute_v4", "Alert muted", "The alert was muted from another screen.",
            R.raw.gg_mute, NotificationManager.IMPORTANCE_DEFAULT, "Alert muted", routine = true, buzz =
Haptics.Buzz.MUTED,
        ),
        EventType.UNMUTED to Kind(
"gg_unmute_v4", "Alert unmuted", "The mute was lifted.",
            R.raw.gg_unmute, NotificationManager.IMPORTANCE_DEFAULT, "Alert unmuted", routine = true, buzz
= Haptics.Buzz.UNMUTED,
        ),
        EventType.LOW_BATTERY_SHUTDOWN to Kind(
"gg_lowbattery_v2", "Low battery shutdown", "The Pi shut itself down, or is about to, because its battery
is low.",
            R.raw.gg_buzzer, NotificationManager.IMPORTANCE_HIGH, "Pi shut down: battery low", routine =
false, buzz = Haptics.Buzz.LOW_BATTERY,
        ),
        EventType.MANUAL_SHUTDOWN to Kind(
"gg_shutdown_v2", "Pi shut down", "Someone pressed Shut down.",
            R.raw.gg_mute, NotificationManager.IMPORTANCE_DEFAULT, "Pi shut down", routine = true, buzz =
Haptics.Buzz.SHUTDOWN,
        ),
    )

privatevarsource: String? = null
// Highest history id already announced. Reset whenever the source (Pi address or cloud)
// changes.
privatevarnewestSeen = 0L

funensureChannels(context: Context) {
        Sounds.init(context)
        Haptics.init(context)
if (Build.VERSION.SDK_INT<26) return
valmanager = context.getSystemService(NotificationManager::class.java)
// A channel's sound and vibration cannot be changed once made, so older channels are retired.
        RETIRED.forEach(manager::deleteNotificationChannel)
valaudio = AudioAttributes.Builder()
            .setUsage(AudioAttributes.USAGE_NOTIFICATION)
            .setContentType(AudioAttributes.CONTENT_TYPE_SONIFICATION)
            .build()
        kinds.values.forEach { kind ->
```

```
            manager.createNotificationChannel(
                NotificationChannel(kind.channel, kind.channelName, kind.importance).apply {
                    description = kind.about

setSound(Uri.parse("android.resource://${context.packageName}/raw/${context.resources.getResourceEntryName(kind.sound)}"), audio)
// Every kind vibrates in its own rhythm: alerts long and hard, routine events short.
                    enableVibration(true)
                    vibrationPattern = kind.buzz.channelPattern()
                }
            )
        }
        manager.createNotificationChannel(
            NotificationChannel(CHANNEL_WATCH, "Watching the Pi", NotificationManager.IMPORTANCE_LOW).apply {
                description = "Keeps the connection to the Pi alive so alerts arrive while the app is closed."
            }
        )
    }

/**
     * Call with each fresh history list. The first list from a source only
     * sets the starting point, so old records never announce themselves.
     *
     * After that each new row is announced once. Alerts always raise a
     * notification. Routine events (capture, mute, unmute) only play their
     * sound while the app is on screen, since the person holding the phone
     * most likely caused them, and raise a notification when it is not.
     * Suppressed spikes are not alerts and stay silent.
     */
funonRows(
        context: Context,
        from: String,
        rows: List<AlertRow>,
        scope: CoroutineScope,
        foreground: Boolean,
        snapshotUrl: (String) ->String?,
    ) {
valnewest = rows.maxOfOrNull { it.id } ?: 0L
if (source != from) {
            source = from
            newestSeen = newest
return
        }
valfresh = rows.filter { it.id> newestSeen &&it.eventin kinds }
if (newest > newestSeen) newestSeen = newest
// At most three per poll, so reconnecting after a long gap does not flood the shade.
        fresh.sortedBy { it.id }.takeLast(3).forEach { row ->
valkind = kinds.getValue(row.event)
if (kind.routine&& foreground) {
                Sounds.play(kind.sound)
                Haptics.play(kind.buzz)
            } else {
                scope.launch {
valpicture = row.snapshot?.let(snapshotUrl)?.let { fetch(it) }
                    show(context, row, kind, picture)
                }
            }
        }
    }

privatefunshow(context: Context, row: AlertRow, kind: Kind, picture: Bitmap?) {
valmanager = NotificationManagerCompat.from(context)
if (!manager.areNotificationsEnabled()) return
// Notification id is the history row id: a row never posts twice, and Mute cancels exactly
// this notification.
valid = (row.id % Int.MAX_VALUE).toInt()
valimmutable = PendingIntent.FLAG_UPDATE_CURRENT or PendingIntent.FLAG_IMMUTABLE
valopen = PendingIntent.getActivity(
            context, 0,
            Intent(context, MainActivity::class.java).addFlags(Intent.FLAG_ACTIVITY_SINGLE_TOP or Intent.FLAG_ACTIVITY_CLEAR_TOP),
            immutable,
        )
valitems = "${row.smoothedCount} ${if (row.smoothedCount == 1) "item"else"items"}"
valtext = when (row.event) {
            EventType.ACCUMULATION, EventType.TEST ->"$items on the water, limit is ${row.thresholdUsed}."
            EventType.AUTO_MUTED ->"$items on the water. Auto-mute silenced the alert."
            EventType.MANUAL ->"$items in view when the snapshot was taken."
            EventType.LOW_BATTERY_SHUTDOWN ->"The battery ran low. Switch the UPS HAT off and on at the Pi
```

```
    to start it again."
181             EventType.MANUAL_SHUTDOWN ->"Someone pressed Shut down. Switch the UPS HAT off and on at the Pi
    to start it again."
182 else ->"Changed on the Pi or another phone."
183         }
184 valhigh = kind.importance>= NotificationManager.IMPORTANCE_HIGH
185 valbuilder = NotificationCompat.Builder(context, kind.channel)
186             .setSmallIcon(R.drawable.ic_stat_gg)
187             .setColor(0xFF128C84.toInt())
188             .setContentTitle(kind.title)
189             .setContentText(text)
190             .setPriority(if (high) NotificationCompat.PRIORITY_HIGHelse
    NotificationCompat.PRIORITY_DEFAULT)
191             .setCategory(if (high) NotificationCompat.CATEGORY_ALARMelse
    NotificationCompat.CATEGORY_STATUS)
192             .setVisibility(NotificationCompat.VISIBILITY_PUBLIC)
193             .setAutoCancel(true)
194             .setContentIntent(open)
195 if (picture != null) {
196             builder.setLargeIcon(picture)
197             builder.setStyle(NotificationCompat.BigPictureStyle().bigPicture(picture).bigLargeIcon(nullas
    Bitmap?))
198         }
199 if (row.event == EventType.ACCUMULATION) {
200 valmute = PendingIntent.getBroadcast(
201                 context, id,
202                 Intent(context,
    MuteReceiver::class.java).setAction(ACTION_MUTE).putExtra(EXTRA_NOTIFICATION_ID, id),
203                 immutable,
204             )
205             builder.addAction(0, "Mute 15 min", mute)
206         }
207         builder.addAction(0, "Open", open)
208 try {
209             manager.notify(id, builder.build())
210         } catch (_: SecurityException) {
211 // Permission was withdrawn between the check and the post.
212         }
213     }
214
215 /**
216      * The low-battery countdown has started. With the app on screen the banner
217      * says so, and this only sounds the buzzer; otherwise it raises a notification.
218      */
219 // Called from AppGraph and AppViewModel once, when the battery state turns to 'counting'.
220 funcountdown(context: Context, seconds: Int?, percent: Int, foreground: Boolean) {
221 valkind = kinds.getValue(EventType.LOW_BATTERY_SHUTDOWN)
222 if (foreground) {
223             Sounds.play(kind.sound)
224             Haptics.play(Haptics.Buzz.COUNTDOWN)
225 return
226         }
227 valmanager = NotificationManagerCompat.from(context)
228 if (!manager.areNotificationsEnabled()) return
229 valopen = PendingIntent.getActivity(
230             context, 0,
231             Intent(context, MainActivity::class.java).addFlags(Intent.FLAG_ACTIVITY_SINGLE_TOP or
    Intent.FLAG_ACTIVITY_CLEAR_TOP),
232             PendingIntent.FLAG_UPDATE_CURRENT or PendingIntent.FLAG_IMMUTABLE,
233         )
234 valleft = seconds ?: 300
235 valtime = "${left / 60}:${(left % 60).toString().padStart(2, '0')}"
236 valnotification = NotificationCompat.Builder(context, kind.channel)
237             .setSmallIcon(R.drawable.ic_stat_gg)
238             .setColor(0xFF128C84.toInt())
239             .setContentTitle("Pi battery low: shutting down in $time")
240             .setContentText("Battery at $percent%. Plug in the charger, or open the app to cancel.")
241             .setPriority(NotificationCompat.PRIORITY_HIGH)
242             .setCategory(NotificationCompat.CATEGORY_ALARM)
243             .setVisibility(NotificationCompat.VISIBILITY_PUBLIC)
244             .setAutoCancel(true)
245             .setContentIntent(open)
246             .build()
247 try {
248             manager.notify(COUNTDOWN_ID, notification)
249         } catch (_: SecurityException) {
250 // Permission was withdrawn between the check and the post.
251         }
252     }
253
254 privateconstvalCOUNTDOWN_ID = 7002
```

```

/** Channels from earlier versions, made before each kind had its own vibration. */
privatevalRETIRED = listOf(
"gg_alerts", "gg_limit_v3", "gg_test_v3", "gg_automute_v3", "gg_capture_v3",
"gg_mute_v3", "gg_unmute_v3", "gg_lowbattery_v1", "gg_shutdown_v1",
    )

privatesuspendfunfetch(url: String): Bitmap? {
valcloudScheme = com.garbageguard.app.ui.components.RemoteImages.CLOUD
if (url.startsWith(cloudScheme)) {
return com.garbageguard.app.ui.components.RemoteImages.cloud?.invoke(url.removePrefix(cloudScheme))
        }
return fetchHttp(url)
    }

privatesuspendfunfetchHttp(url: String): Bitmap? = withContext(Dispatchers.IO) {
        runCatching {
valconn = URL(url).openConnection() as HttpURLConnection
try {
                conn.connectTimeout = 2500
                conn.readTimeout = 4000
if (conn.responseCode != 200) nullelse conn.inputStream.use { BitmapFactory.decodeStream(it) }
            } finally {
                conn.disconnect()
            }
        }.getOrNull()
    }
}
```

Listing K10. *WatchService.kt: Background Watch Service and Mute Action (Android)*

```
package com.garbageguard.app.notify

import android.app.PendingIntent
import android.app.Service
import android.content.BroadcastReceiver
import android.content.Context
import android.content.Intent
import android.content.pm.ServiceInfo
import android.os.Build
import android.os.IBinder
import androidx.core.app.NotificationCompat
import androidx.core.app.NotificationManagerCompat
import androidx.core.content.ContextCompat
import com.garbageguard.app.MainActivity
import com.garbageguard.app.R
import kotlinx.coroutines.launch

/**
 * Keeps the app alive in the background while it follows a real Pi. Android
 * freezes an app soon after it leaves the screen; a foreground service with
 * its own small notification is the supported way to keep polling, which is
 * what lets an alert arrive while the app is closed.
 */
classWatchService : Service() {

overridefunonBind(intent: Intent?): IBinder? = null

overridefunonStartCommand(intent: Intent?, flags: Int, startId: Int): Int {
        AppGraph.init(this)
valaddress = AppGraph.prefs(this).getString(AppGraph.KEY_ADDRESS, "").orEmpty()
// No open session means the user left: nothing to watch, and no notification.
if ((address.isEmpty() && !AppGraph.cloudReady) || !AppGraph.sessionOpen(this)) {
            stopSelf()
return START_NOT_STICKY
        }
// After Android restarts the service on its own, the connection is gone too.
if (!AppGraph.linked) AppGraph.connect(address)

valopen = PendingIntent.getActivity(
this, 0, Intent(this, MainActivity::class.java),
            PendingIntent.FLAG_UPDATE_CURRENT or PendingIntent.FLAG_IMMUTABLE,
        )
valnotification = NotificationCompat.Builder(this, Alerts.CHANNEL_WATCH)
            .setSmallIcon(R.drawable.ic_stat_gg)
            .setColor(0xFF128C84.toInt())
            .setContentTitle("Watching the Pi for alerts")
            .setContentText(address.ifEmpty { "Through Firebase" })
            .setOngoing(true)
            .setContentIntent(open)
```

```
            .build()
try {
if (Build.VERSION.SDK_INT>= 29) {
                startForeground(WATCH_ID, notification,
ServiceInfo.FOREGROUND_SERVICE_TYPE_CONNECTED_DEVICE)
            } else {
                startForeground(WATCH_ID, notification)
            }
        } catch (_: Exception) {
// Android refused the foreground start. Alerts then only work while the app is open.
            stopSelf()
return START_NOT_STICKY
        }
return START_STICKY
    }

/**
     * The app was swiped away from the recent apps. That is the user closing
     * it, so the connection is dropped, the notification goes, and the next
     * launch starts at the start page.
     */
overridefunonTaskRemoved(rootIntent: Intent?) {
        AppGraph.setSession(this, false)
        AppGraph.disconnect()
        stopForeground(STOP_FOREGROUND_REMOVE)
        stopSelf()
super.onTaskRemoved(rootIntent)
    }

companionobject {
privateconstvalWATCH_ID = 7001

funstart(context: Context) {
// Without notification permission startForeground would fail anyway, so skip quietly.
if (!NotificationManagerCompat.from(context).areNotificationsEnabled()) return
try {
                ContextCompat.startForegroundService(context, Intent(context, WatchService::class.java))
            } catch (_: Exception) {
// Not allowed from the background; the next time the app opens it starts.
            }
        }

funstop(context: Context) {
            context.stopService(Intent(context, WatchService::class.java))
        }
    }
}

/** The "Mute 15 min" button on an alert notification. */
classMuteReceiver : BroadcastReceiver() {
overridefunonReceive(context: Context, intent: Intent) {
if (intent.action != Alerts.ACTION_MUTE) return
        NotificationManagerCompat.from(context).cancel(intent.getIntExtra(Alerts.EXTRA_NOTIFICATION_ID, 0))
valpending = goAsync()
        AppGraph.scope.launch {
try {
// 900 s matches the 'Mute 15 min' label on the notification button.
                AppGraph.mute?.invoke(900)
            } finally {
                pending.finish()
            }
        }
    }
}
```

X. STUDENTS' BIONOTE



Brian Jay Celeste, a student enrolled in Computer Engineering Technology at the TUP - Manila and achieved N3 certification in the Japanese Language Proficiency Test (JLPT). He works on software development, artificial intelligence, embedded systems, and electronics as his primary technical focus areas. The study designates him as the second project developer who develops the system architecture and trains the YOLO26 garbage detection model through computer vision, mainly focusing on Android App integration.



Genesis Walter D. Reyes II, a Computer Engineering Technology Student in Technological University of the Philippines. He mainly focuses on his interests in both hardware and software. The study designates him as the first project developer, who is the main developer who trained the YOLO26 garbage detection model.



Jade C. Gunayan, a Computer Engineering Technology Student in Technological University of the Philippines. He conducts research testing and statistical analysis to verify the thesis prototype system's trustworthy performance.



King Perth G. Pepito, a Computer Engineering Technology student at the Technological University of the Philippines. His current research project work involves analyzing systems, designing organizational rules, and proofreading research documentation to guarantee the successful execution of the project.



Rodel S. Banogbanog, a Computer Engineering Technology student at TUP-Manila with interest in both hardware and software technologies, also achieved Certification of NCII of CSS and NCII of Electrical Installation. In this study, Banogbanog handles the project fabrication and design actualization.